


Illustration
插图



备注Remark:

两个连接头的“A”标记与排线的红边成一行

The marking "A" on the both connectors align with the red line of the flat cable.

Technical Data:


Insulator Material : Thermoplastic, UL 94V-0
 Contact : stamped and formed, phosphor Bronze
 Contact : Au or Sn over Nickel
 Current Rating : 1amp
 Contact resistance : 20 milliohms Max
 Insulator resistance : 1000Megohms min
 Dielectric withstanding : AC 500V for 1Minute
 Operating temperature : -40 ° C~105° C
 Mates With : 343 IDC Socket
 Wire size : 28AWG(1.0mm Pitch)

客户确认
Customer approved
Sign & Chop


UNIT单位:MM

②	V19001R2.54IDC 6P(2)	2PCS	2.54 IDC 6P 两件式 黑色 Black	
①	W23001R UL2651286P	280MM	UL 2651 28AWG 6P PH:1.27MM 外被Jacket:PVC 灰Grey/红Red	
NO 序号	V-code V-编码	Part NO 款号	Qty 用量	Description 描述

Remark:comply With ROHS

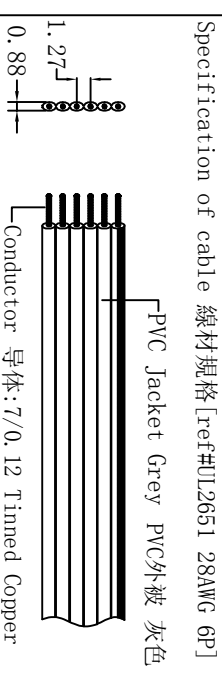

Specification of cable 線材規格 [ref#UL2651 28AWG 6P]
 PVC Jacket Grey PVC外被 灰色
 Conductor 导体: 7/0.12 Tinned Copper



Dimension of IDC 尺寸 [ref#2.54IDC6P(2)]

协威亚洲有限公司 HERWELL ASIA LTD	
图纸编号Drawing No	DG01032-0059-01
款号 P/N	2x3FC-280mm
型号 Model No	
品名 Description	
版次 Version	01
绘图/日期Drawn By/Date	ML20/11/30
审核/日期 Check By/Date	
Eng CheckBy/Date	LJN 20-11-30