

Saleae Logic 8 USB Logic Analyzer



Key Features

Feature	Description
Channels	Eight digital inputs, Eight analog inputs (shared with digital channels)
Maximum Sample Rates	Digital: 100 MSPS @ 3 channels, 50 MSPS @ 6 channels, 25 MSPS @ 8 channels Analog: 10 MSPS @ 2 channels, 5 MSPS @ 5 channels, 2.5 MSPS @ 8 channels
Bandwidth	Digital: 25 MHz square wave when sampling at 100 MSPS Analog: 1 MHz when sampling at 10 MSPS
Trigger	Edge or pulse width trigger
Software	Cross-platform Windows, Mac and Linux support
Supported Protocols	Serial, SPI, I2C, Atmel SWI, Biss-C, CAN, DMX-512, HD44780, HDLC, I2S, JTAG, LIN, MDIO, MIDI, Manchester, Modbus, 1-Wire, PS/2 Keyboard & Mouse, SMBus, SWD, Synchronous Parallel, USB, UNI/O
Capture Buffer Length	Limited by installed memory and digital data density. When recording analog at 10 MSPS, captures 30-60 seconds usually possible. Without analog, buffer length is dependent on digital activity density. 1 MHz SPI: up to 10 Minutes. I2C – several hours – 9600 baud serial – over 1 day.
Analog Resolution	10 bits, 4.88 mV per LSB
Analog Input Range	0V to 5V
Supported digital IO standards	1.8V, 2.5V, 3.3V, 5.0V, RS-232, +12V TTL

What is a Logic Analyzer?


Logic analyzers are great for debugging embedded applications.

They operate by sampling a digital input connected to a device under test (DUT) and then displaying the recording on your computer.

This is great for debugging a wide range of embedded problems. For instance, If an I2C device isn't responding, you can record SDA and SCL to see if the start condition, device address, and ACK/NAK bit frame look right. It is a huge help for any project with a microcontroller, FPGA or ARM chip.

Easy-to-use Software


The Saleae Logic devices connect to your PC over USB. Just download the software at www.saleae.com.



Navigate your data easily and intuitively with Logic's fluid and fully animated mouse-driven interface. Drag the display with the mouse, zoom with the scroll wheel, even toss the display to find nearby events.

Protocol Decoding

The Saleae products support decoding for over 20 different protocols. This means when you record those SPI messages, or a CAN bus, you won't need to stare at transitions and clock edges. Instead, just add the protocol decoder and read the data entire bytes – or even transactions at a time.

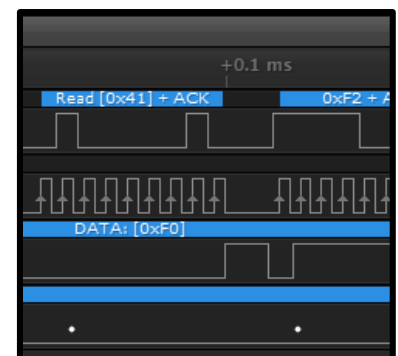

Saleae Logic 8 USB Logic Analyzer

FEATURES

- Powerful, Easy-to-use Software
- Deep Sample Buffers
- Highly Portable, USB Attached
- 24 Included Protocol Analyzers
- Automation API
- Custom Protocol Decoder Plugin API
- Edge and Pulse Width Triggering
- Protocol Result Filter and Search
- Measurements, Bookmarks and Timing Markers
- Four Data Export Formats: CSV, Binary, VCD and MATLAB
- Cross Platform Windows, Linux, and OSX

APPLICATIONS

- Firmware Debugging
- FPGA Debugging
- Functional Verification
- Performance Profiling
- Reverse Engineering
- Protocol Decoding
- Data Logging

KEY SPECIFICATIONS

- Eight Digital Channels
- 100 MSPS Digital Sampling (max)
- 25 MHz Max Digital Bandwidth
- Eight Analog Channels
- 10 MSPS Analog Sampling (max)
- 1 MHz Analog Bandwidth
- Recording Length Limited by Available RAM and Density of Recorded Data
- RGB LED, Customizable 24 bit Color

DESCRIPTION

The Saleae Logic 8 USB Logic Analyzer is an 8 channel logic analyzer with each input dual purposed for analog data recording. The device connects to a PC over USB and uses the Saleae Logic Software to record and view digital and analog signals.

A logic analyzer is a debugging tool used to record and view digital signals. It operates by sampling a digital input connected to a device under test (DUT) at a high sample rate. These samples are recorded to a sample buffer, and at the end of the capture, the buffer is displayed in the software for review.

Logic analyzers are great for debugging embedded applications. In the most common case, a developer working on firmware for a microcontroller will write code to communicate with another component, possibly using protocols like serial, I2C, or SPI. To verify the functionality or to diagnose errors in the firmware, a logic analyzer is connected to the digital IO used for communication and records the activity during testing. The recording is then shown on the display so the user can view the actual behavior of the firmware, and compare that with the expected behavior to narrow down and identify the source of the issue – or verify that the operation is correct.

INCLUDED COMPONENTS

Saleae Logic 8 USB Logic Analyzer, 2x 4 Channel Wire Harnesses, 16 Micro-Gripper Hooks, Saleae Carrying Case, USB micro cable, and a Getting Started Guide



www.saleae.com

PIN CONFIGURATION

Channel 0 [Digital + Analog]	Channel 1 [Digital + Analog]	Channel 2 [Digital + Analog]	Channel 3 [Digital + Analog]
Ground	Ground	Ground	Ground

Channel 4 [Digital + Analog]	Channel 5 [Digital + Analog]	Channel 6 [Digital + Analog]	Channel 7 [Digital + Analog]
Ground	Ground	Ground	Ground

ABSOLUTE MAXIMUM RATINGS

Input Voltage -25.00V to +25.00V
 Operating Temperature 0°C to +70°C

OPERATING RATINGS

Input Voltage +0.00V to +5.00V
 Temperature 0°C to +70°C

ELECTRICAL CHARACTERISTICS

Input Impedance	1 MΩ 10 pF
Digital Sampling Rates	100 ^{***} , 50 ^{***} , 40 ^{***} , 25, 20, 10, 8, 5, 4, 2, 1 MSPS
Analog Sample Rates	10, 5, 2, 5, 1.25 MSPS, 625, 125*, 5*, 1* KSPS, 100*, 10* SPS
Digital Logic Threshold	V _{IL} +0.6V, V _{IH} +1.2V
Common Supported Logic Standards	+5.0V, +3.3V, +2.5V, +1.8V, RS-232, RS-485/RS-422, +12V
Digital Bandwidth	25 MHz
Analog Bandwidth (-3db)	1 MHz ^{**}
ADC Number of Bits	10
Analog Input Voltage Range	+0.0V to +5.0V
Analog Volts per LSB	4.88 mV
PC Connection	USB 2.0 High Speed

Notes:

*Planned sample rates.

**Bandwidth when sampling at 10 MSPS.

***100 MSPS digital on up to 3 channels, 50 MSPS on up to 6 channels, 40 MSPS on up to 7 channels



www.saleae.com

APPLICATION INFORMATION

The Saleae Logic Software user guide can be located on the Saleae support site:

<http://support.saleae.com>

System Requirements

Supported Operating Systems: Windows XP (x32), Windows Vista (x32/x64), Windows 7 (x32/x64), Windows 8 (x32/x64), Windows 8.1 (x32/x64), OSX 10.7+, Ubuntu Linux 12.04.2+ (x32/x64)

USB 2.0 high speed ports are required.

The Saleae Logic Software can be downloaded from the Saleae website:

<https://www.saleae.com/downloads>

Sample Buffer Limit

The maximum recording length is determined by the density of activity in the recorded signal, the amount of free memory available to the Logic software, and the exact settings of the capture. More information, as well as recommendations, can be found on the Saleae support site:

<http://support.saleae.com/hc/en-us/articles/203939395>

Bandwidth vs Sample Rate

In order to accurately record a signal, the sample rate must be sufficiently higher in order to preserve the information in the signal, as detailed in the Nyquist–Shannon sampling theorem. Digital signals must be sampled at least four times faster than the highest frequency component in the signal. Analog signals need to be sampled ten times faster than the fastest frequency component in the signal.

Active Channels vs Maximum Sample Rate

The maximum sample rates for digital and analog recordings is limited by the available USB bandwidth. Because of this, sampling at the maximum rate is not possible on all channels at once. To find out exactly what sample rates are available, please download the Saleae Logic Software from our website:

<http://www.saleae.com/downloads>

Some example sample rate combinations:

3 channels, digital only, 100 MSPS

8 channels, digital only, 25 MSPS

2 channels, analog only, 10 MSPS

8 channels, analog only, 2.5 MSPS



www.saleae.com

CONSIDERATIONS

Many additional considerations and suggestions can be found in the Saleae support material on the website:

<http://support.saleae.com>

Ground Loops

Ground loops introduce risk of damage to the equipment. To mitigate the risk of damage, follow the precautions outlined on the Saleae website:

<http://support.saleae.com/hc/en-us/articles/200671790>

Over Voltage Protection

The input pins on the new Saleae Logic devices (Logic 4, Logic 8, Logic Pro 8 and Logic Pro 16) have protection for signals within -25.00V to +25.00V for continuous operation. The device can be safely used for normal operation with signals in this range. The analog input on Logic 4 and Logic 8 is limited to +0V to +5V, and will saturate (take on minimum or maximum value) outside of this range. Logic Pro 8 and Logic Pro 16 have an analog input limited to -10V to +10V, and will saturate outside of that range.

Differential Signals

Each digital input is single ended only. It is recommended to use a differential to single ended receiver to first convert a differential signal to single ended before attempting to record. This is not always necessary. Details can be found on the Saleae support site:

<http://support.saleae.com/hc/en-us/sections/200074169>