

Specifications:

Current rating: 3.0A AC, DC
 Voltage rating: 250V AC, DC
 Contact resistance: 20m ohm max.
 Insulation resistance: 1,000M ohm min.
 Withstanding voltage: 600V AC/minute
 Operating Temperature range: -40°C to +105°C
 Material:


Insulator: PBT (UL94V-0)
 Standard Color: Black
 Contact: Copper Alloy
 Finish: Gold Plated

How To Order
 2214S-XXG-85

Plastic Height 8.5mm
 Gold Plated
 No. Of Positions
 S: Straight

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
4	5.58	2.54	24	30.98	27.94	44	56.38	53.34	64	81.78	78.74
6	8.12	5.08	26	33.52	30.48	46	58.92	55.88	66	84.32	81.28
8	10.66	7.62	28	36.06	33.02	48	61.46	58.42	68	86.86	83.82
10	13.20	10.16	30	38.60	35.56	50	64.00	60.96	70	89.40	86.36
12	15.74	12.70	32	41.14	38.10	52	66.54	63.50	72	91.94	88.90
14	18.28	15.24	34	43.68	40.64	54	69.08	66.04	74	94.48	91.44
16	20.82	17.78	36	46.22	43.18	56	71.62	68.58	76	97.02	93.98
18	23.36	20.32	38	48.76	45.72	58	74.16	71.12	78	99.56	96.52
20	25.90	22.86	40	51.30	48.26	60	76.70	73.66	80	102.1	99.06
22	28.44	25.40	42	53.84	50.80	62	79.24	76.20			

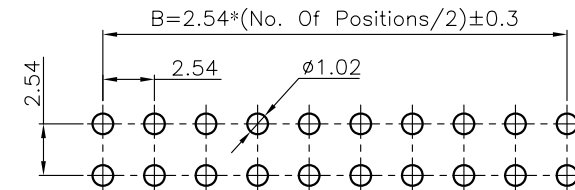

P.C.B. Layout

RoHS Compliant

E				DRAWN:	GENERAL TOLERANCE:	繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION:	SIZE
D				Allen	.X = ±0.2			
C				CHECKED:	.XX = ±0.15	2.54mm PCB Socket Double Row Straight	A4	
B	19-APR-2012		Allen	Jerry Chen	UNIT: MM			
A	06-APR-2011		Allen	APPROVAL:	SCALE:	PART NO:	2214S-XXG-85	
REV	DATE	FILE	BY	Mike Wu	SHEET: 1 / 1			
					PROJECTION:			