


SECTION B-B 1:1



Specifications:

Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:20m ohm. max.
 Insulation resistance:1000M ohm. Min.
 Withstanding voltage:600V AC for one minute
 Operating temperature range: -40°C to +105°C
 Material and Finish:

Insulator: High Temp Plastic (Nylon 46 UL94V-0)
 Standard Color:Black
 Contact: Copper Alloy
 Plating:Selective Gold Plated


How to order

2214S-XXSG-36

- Plastic Height 3.6mm
- Selective Gold Plated
- No. Of Contacts
- S: Straight

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
4	5.08	2.54	24	30.48	27.94	44	55.88	53.34	64	81.28	78.74
6	7.62	5.08	26	33.02	30.48	46	58.42	55.88	66	83.82	81.28
8	10.16	7.62	28	35.56	33.02	48	60.96	58.42	68	86.36	83.82
10	12.70	10.16	30	38.10	35.56	50	63.50	60.96	70	88.90	86.36
12	15.24	12.70	32	40.64	38.10	52	66.04	63.50	72	91.44	88.90
14	17.78	15.24	34	43.18	40.64	54	68.58	66.04	74	93.98	91.44
16	20.32	17.78	36	45.72	43.18	56	71.12	68.58	76	96.52	93.98
18	22.86	20.32	38	48.26	45.72	58	73.66	71.12	78	99.06	96.52
20	25.40	22.86	40	50.80	48.26	60	76.20	73.66	80	101.6	99.06
22	27.94	25.40	42	53.34	50.80	62	78.74	76.20			

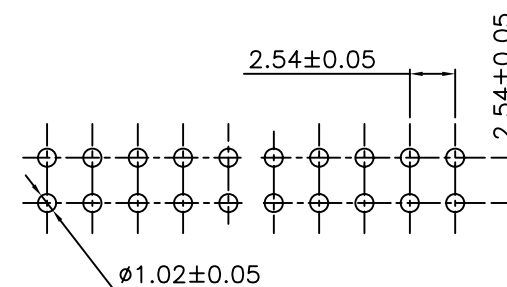

P.C.B. LAYOUT

RoHS Compliant

E			
D			
C			
B	14-DEC-2004	ECN-CN041214	CJH
A	03-21-2003		JACK
REV	DATE	FILE	BY

DRAWN: CJH
 CHECKED: Jeremy Liu
 APPROVAL: Mike Wu

GENERAL TOLERANCE:
 .X=±0.2
 .XX=±0.15
 UNIT: MM
 SCALE:
 SHEET: 1 / 1
 PROJECTION:

繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION: 2.54mm PCB Socket Double Row Straight

PART NO: 2214S-XXSG-36

SIZE
A4