


1

2

3

4

5

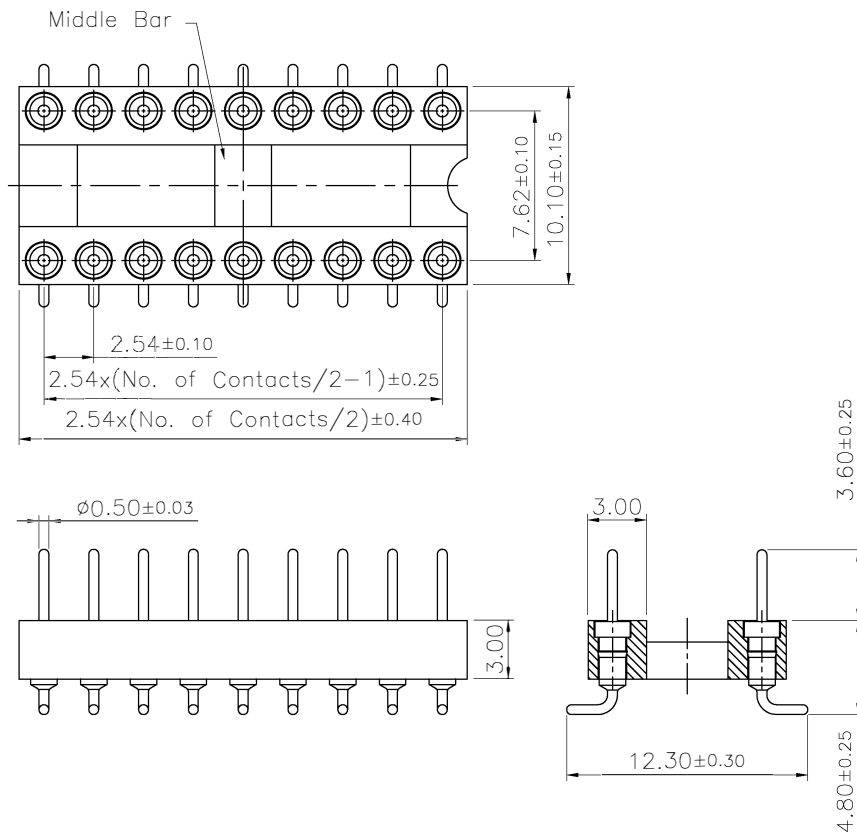


Note1: W/O middle bar(4~10,14~24,28P)
With middle bar(18~24,28P)

Specifications:
Current Rating: 3.0A AC,DC
Voltage Rating: 150V AC,DC
Contact Resistance: 10m ohm.Max
Insulation Resistance: 5000M ohm.Min
Withstanding Voltage: 500V AC/Minute
Operating Temperature Range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$



Material:
Insulator: PPS(UL94V-0)
Insulator Color: Black
Terminal: Brass
Plated: Gold Plated

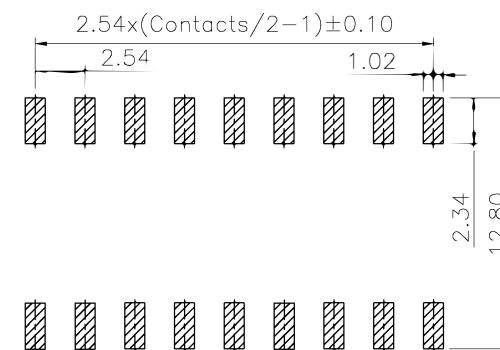How To Order
2227MC-XX-03-150
Pin Length
Row to Row Space
03: 7.62mm
No. of Contacts
Machine Pin



P.C.B Layout

RoHS Compliant

F				DRAWN: Romina Wu	GENERAL TOLERANCE: .X= ± 0.20 .XX= ± 0.15	 Neltron Industrial Co., Ltd.	DESCRIPTION: 2.54mm IC Socket Machine Pin SMD Type	SIZE
E								
D				CHECKED: Jerry Chen	UNIT: MM	PART NO:	A4	
C					SCALE: 1:1			
B				APPROVAL: Rory Chen	SHEET: 1/1	2227MC-XX-03-150		
A	20-JAN-2020		Romina Wu		PROJECTION: 			
REV	DATE	FILE	BY					