

Technical Data

Pin(outer sleeve): Brass, machined  
CuZn38Pb2

Insulator: PPS UL94V-0 colour: black

Current rating: 3Amps

Mechanical life: min 500cycles


Contact resistance: max 10m

Dielectric strength: min 1000V RMS

Operating temperature: -40°C  
to +105°C

Soldering temperature: +255°C

PIN: 18, 24, 28, 32, 40, 42, 48, 50

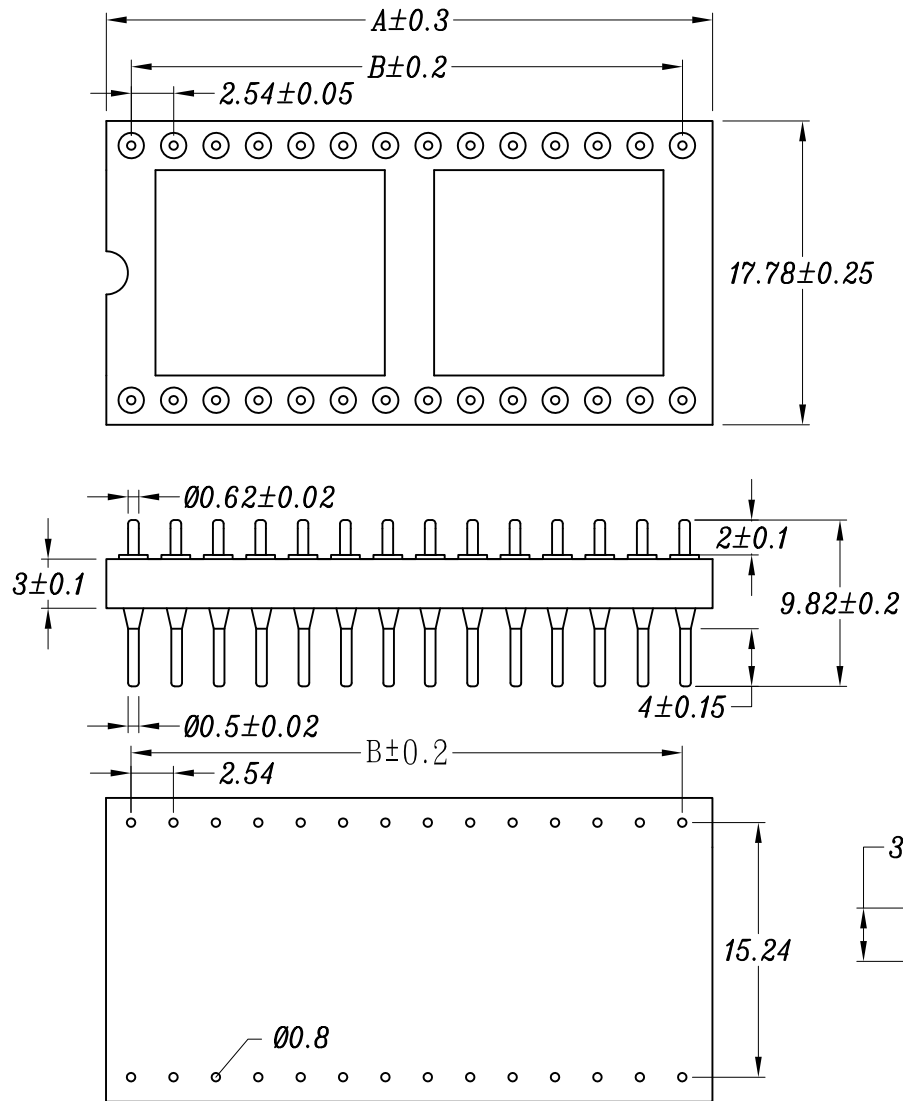

Recommended P.C.B Layout(±0.5)

PIN	A	B
18	22.86	20.32
24	30.48	27.94
28	35.56	33.02
32	40.64	38.10
40	50.80	48.26
42	53.34	50.80
48	60.96	58.42
50	63.50	60.96



Chang Enn Co., Ltd.

NO.410, FU-TEH 1ST ROAD,  
SHIJR, TAIPEI COUNTY  
221, TAIWAN, R.O.C.

TEL: 886-2-26945824

FAX: 886-2-26946971

TITLE

2.54X15.24圓孔排針  
H2.0 L=9.82

PARTS NO.

2227P-XXG-06-L2

DWG, NO.

GENERAL  
TOLERANCE

DIM:  
XX. ±3.00  
X. ±1.00  
X.X ±0.50

DRAWN

CHECK

APPROVE

SCALE

DATE

DATE

DATE

UNIT

MM

REV.

D