


HOW TO ORDER

2227P-XXG-XX-10

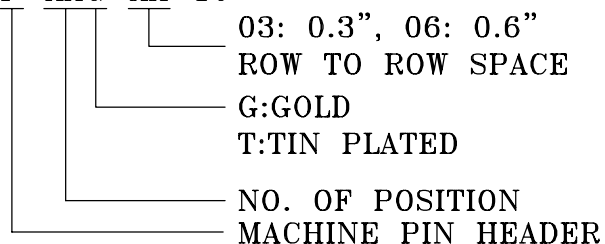

03: 0.3", 06: 0.6"

ROW TO ROW SPACE

G:GOLD

T:TIN PLATED


NO. OF POSITION

MACHINE PIN HEADER

TYPE 1	DIM A	DIM B	DIM C	TYPE 2	DIM A	DIM B	DIM C
20	25.40	15.24	17.78	06	7.62	7.62	10.16
24	30.48	15.24	17.78	08	10.16	7.62	10.16
28	35.56	15.24	17.78	10	12.70	7.62	10.16
32	40.64	15.24	17.78	14	17.78	7.62	10.16
36	45.66	15.24	17.78	16	20.32	7.62	10.16
40	50.80	15.24	17.78	18	22.86	7.62	10.16
42	53.34	15.24	17.78	20	25.40	7.62	10.16
48	60.96	15.24	17.78	22	27.94	7.62	10.16
				24	30.48	7.62	10.16
				28	35.56	7.62	10.16


MATERIAL & FINISH

- * Contact: Brass
Plating: G=Gold Plated
T=Tin Plated
- * Insulator: Thermoplastic polyester
- * Resist to Soldering Heat: Max. 260°C, 5 Sec.
- * Solderability: 235°C, 5 Sec.
- * Current Rating: 3A
- * Voltage rated: 100VRMS / 150VDC
- * Contact Resistance : 10 Milliohm
- * Insulator Resistance : 10000M ohm min.
- * Dielectric Strength : 1000 VRMS Min
- * Rated Voltage : 100 VRMS / 150VDC
- * Temperature: - 55°C TO + 125°C

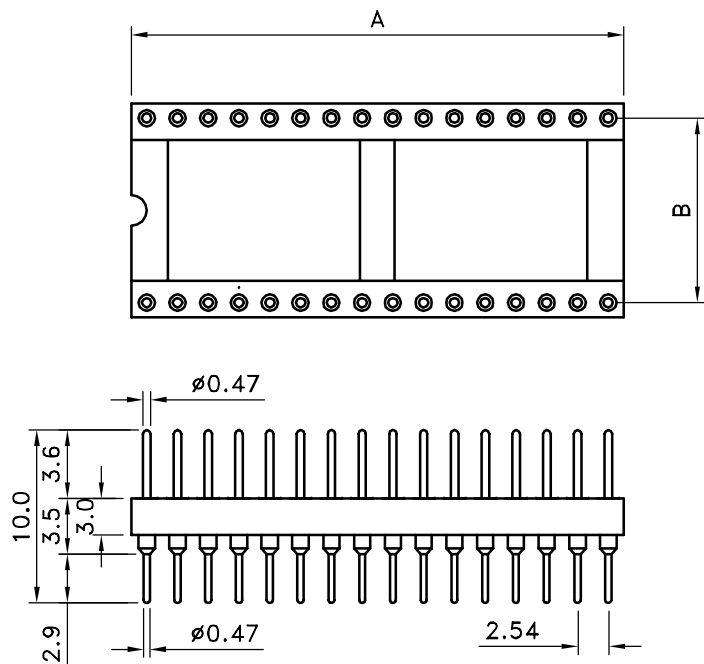

2227P-XX-06

TYPE 1

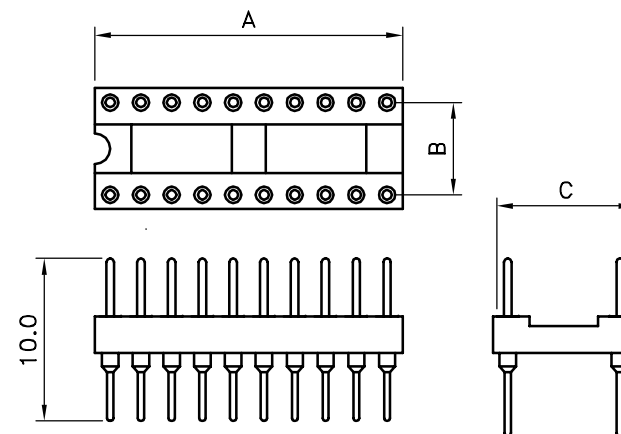

2227P-XXG-03-10

TYPE 2

E				DRAWN: Jerry Chen	GENERAL TOLERANCE: .X=±0.25 .XX=±0.20	Neltron Industrial Co., Ltd.	DESCRIPTION: MACHINE PIN HEADER	SIZE A4
D								
C				APPROVAL: Mike	SCALE:	SHEET: 1 / 1	PROJECTION:	
B					A			04-22-2003
REV	DATE	FILE	BY					