


Circuits	Dim.A	Dim.B	Dim.C	Circuits	Dim.A	Dim.B	Dim.C
2	2.54	7.62	5.72	11	25.40	30.48	28.58
3	5.08	10.16	8.26	12	27.94	33.02	31.12
4	7.62	12.70	10.80	13	30.48	35.56	33.66
5	10.16	15.24	13.34	14	33.02	38.10	36.20
6	12.70	17.78	15.88	15	35.56	40.64	38.74
7	15.24	20.32	18.42	16	38.10	43.18	41.28
8	17.78	22.86	20.96	17	40.64	45.72	43.82
9	20.32	25.40	23.50	18	43.18	48.26	46.36
10	22.86	27.94	26.04				



Specifications:



Current Rating: 2.5A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 15m ohm. Max.  
 Insulation Resistance: 1000M ohm. Min.  
 Withstanding Voltage: 600V AC/Minute  
 Operating Temperature Range: -25°C To +85°C

Material And Finish:

Insulator: PBT (UL94V-0)  
 Insulator Color: Black  
 Terminal: Brass  
 Plating: Gold Plated

How To Order

3750R-XX

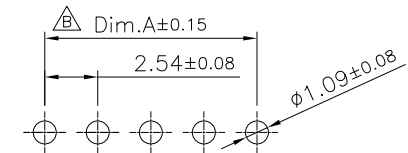

P.C.B layout

RoHS Compliant

F				DRAWN: Allen
E				
D				CHECKED: Jerry Chen
C				
B	08-Apr-2019	Modify Dim	Jamie Wang	APPROVAL: Allen
A	26-OCT-2009			
REV	DATE	FILE	BY	Mike Wu

GENERAL TOLERANCE: .X = ± 0.25 .XX = ± 0.2
UNIT: MM
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:



**Neltron Industrial Co., Ltd.**

DESCRIPTION: 2.54mm Pocket Header R/A Single Row	SIZE <b>A4</b>
PART NO: 3750R-XX	