




1

2

3

4

5

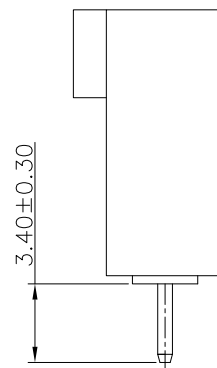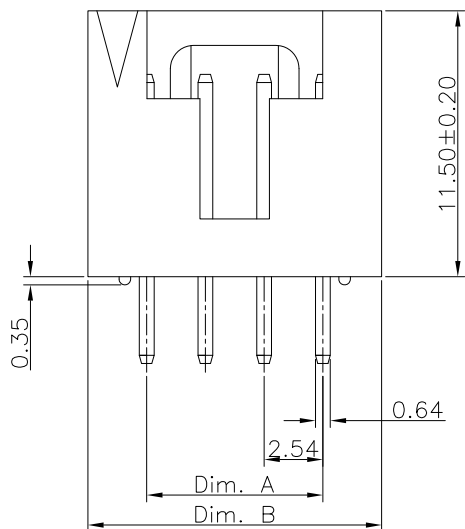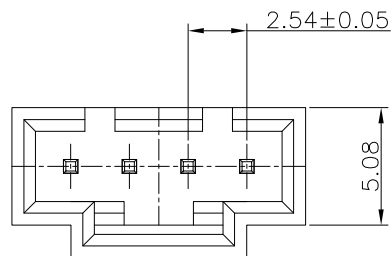

## Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:15m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:600V AC/Minute

Operating Temperature Range:-40°C To +105°C

## Material And Finish:

Insulator:PBT (UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Plating: See How to order

## How To Order

3750S-XXX

Blank Gold flash

G15:Contact Area Gold Plated 15u"

Other Area Gold flash

SG10:Contact Area Gold Plated 10u"

Solder Tail Tin Plated.


SG15:Contact Area Gold Plated 15u"

Solder Tail Tin Plated.

No. of Contacts

Straight Type

Circuits	Dim.A	Dim.B
2	2.54	7.62
3	5.08	10.16
4	7.62	12.70
5	10.16	15.24
6	12.70	17.78
7	15.24	20.32
8	17.78	22.86
9	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02

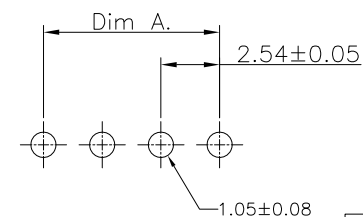

PCB LAYOUT

RoHS Compliant

F			
E			
D			
C			
B			
A	23-OCT-2019		JERRY
REV	DATE	FILE	BY

DRAWN:  
JERRY

CHECKED:

APPROVAL:

RORY

GENERAL TOLERANCE:

.X=±0.20  
.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1/1

PROJECTION:

**Neltron Industrial Co., Ltd.**

DESCRIPTION:

2.54mm Pocket Header Straight Single Row

PART NO:

3750S-XXX

SIZE

**A4**