
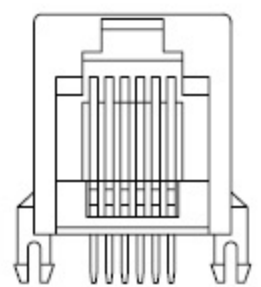




Specifications:  
 Current Rating: 1.5A AC/DC  
 Voltage Rating: 125V AC/DC  
 Contact Resistance: 20m ohm. Max.  
 Insulation Resistance: 500M ohm. Min.  
 Withstanding Voltage: 1,000V AC For One Minute  
 Operating Temperature Range: -40°C to +85°C  
 Material and Finish  
 Insulator: PBT (UL94V-0)  
 Insulator Color: Black  
 Contact: Copper Alloy  
 Plated: Gold Plated Over Nickel.  
 How To Order  
 7002-6PXC-X

Blank: With Flange  
 01: W/O Flange  
 No. Of Contacts 2,4,6  
 No. Of Positions

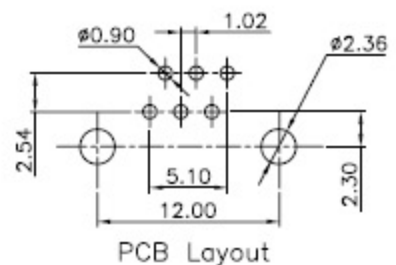

01:W/O Flange

RoHS Compliant

				<b>DRAWN:</b> Allen	<b>GENERAL TOLERANCE:</b> .X=±0.2 .XX=±0.15	 <b>繼德工業股份有限公司</b> <b>Neltron Industrial Co., Ltd.</b>	<b>DESCRIPTION:</b> PCB MOUNT JACK, SIDE ENTRY	<b>SIZE</b> <b>A4</b>
				<b>CHECKED:</b> Jerry Chen	<b>UNIT:</b> mm <b>SCALE:</b> 1:1			
				<b>APPROVAL:</b> Mike Wu	<b>SHEET:</b> 1 / 1 <b>PROJECTION:</b> 	<b>PART NO:</b> 7002-6PXC-X		
<b>REV</b>	<b>DATE</b>	<b>FILE</b>	<b>BY</b>					
E								
D								
C								
B	27-Aug-2009		Zhou Lin					
A	30-SEP-2008		Allen					