



Specifications:  
 Current Rating: 1.5A AC/DC  
 Voltage Rating: 125V AC/DC  
 Contact Resistance: 20m ohm. Max.  
 Insulation Resistance: 500M ohm. Min.  
 Withstanding Voltage: 1,000V AC For One Minute  
 Operating Temperature Range: -40°C to +85°C  
 Material and Finish  
 Insulator:PBT (UL94V-0)  
 Insulator Color:Black  
 Contact:Copper Alloy  
 Plated:Gold Plated Over Nickel.  
 How To Order  
 7002-XPXC-X

Blank:With Flange  
 01:W/O Flange  
 No. Of Contacts  
 No. Of Positions



01:W/O Flange

Pos	CONTACT	Dim.A	Dim.B	Dim.C	Dim.D
4P	4C	12.23	7.97	11.96	14.11
6P	2C/4C/6C	12.20	10.00	12.00	14.20

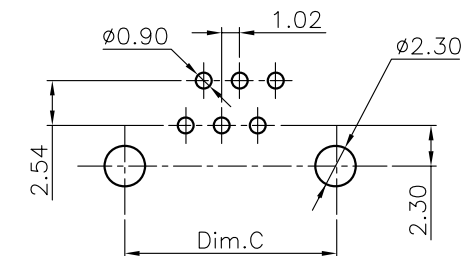

PCB Layout

RoHS Compliant

E				<b>DRAWN:</b> Allen	<b>GENERAL TOLERANCE:</b> .X=±0.2 .XX=±0.15	<b>繼德工業股份有限公司</b> <b>Neltron Industrial Co., Ltd.</b>	<b>DESCRIPTION:</b> PCB MOUNT JACK, SIDE ENTRY	<b>SIZE</b> <b>A4</b>
D				<b>CHECKED:</b> Jerry Chen				
C				<b>APPROVAL:</b> Mike Wu	<b>UNIT:</b> mm	<b>PART NO:</b> 7002-XPXC-X		
B					<b>SCALE:</b>			
A	28-NOV-2008		Allen		<b>SHEET:</b> 1 / 1			
<b>REV</b>	<b>DATE</b>	<b>FILE</b>	<b>BY</b>		<b>PROJECTION:</b>			