

# SPECIFICATION FOR APPROVAL



**CUSTOMER** Akizuki Denshi Tsusho Co., Ltd.

**CUSTOMER'S DWG NO.** \_\_\_\_\_

**CUSTOMER'S PART NO** \_\_\_\_\_

**OUR DWG NO.** IT2266682

**QUANTITY** \_\_\_\_\_ **DATE:** 11-JUNE-2010

**ITEM.** AL0307-220K

	✓	CUSTOMER'S SIGNATURE	NOTE
FULL APPROVED			
CONDITIONAL APPROVED			
REJECTED			

PLEASE RETURN AFTER APPROVING



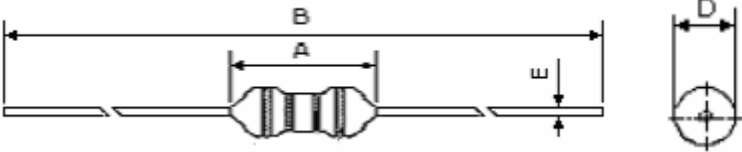



**CORE MASTER ENTERPRISE CO., LTD.**

**TAIWAN: 7F-1, No.129, Lane 235, Baoqiao Rd., Xindian City,  
Taipei County 231, Taiwan (R.O.C.)**

**TEL:886-2-89191288 FAX:886-2-89191298**  
**<http://www.coremaster.com.tw>**

**CHINA: YULIAN, QINGXI TOWN, DONGGUAN, GUANGDONG, CHINA**  
**TEL:86-769-86950588 FAX:86-769-86950587**

# SPECIFICATION FOR APPROVAL

CUSTOMER :			DATE :					
PART NO : AL0307-220K			DWG.NO : IT2266682					
CUSTOMER PART NO :			CUST.DWG.NO :					
(1) DIMENSION (UNIT: mm)  			A	8.0 (MAX)	m/m			
			B	62.00 ± 6.00	m/m			
			D	3.0 (MAX)	m/m			
			E	0.55 ± 0.05	m/m			
			F		m/m			
			G		m/m			
			H		m/m			
			I		m/m			
			J		m/m			
			K		m/m			
			(2) ELECTRICAL REQUIREMENTS					
			L (uH)	22 ± 10%	TEST FREQ			
Q	50 (MIN)	TEST FREQ	2.52 MHz					
RDC (Ω)	1.2 (MAX)	TEST FREQ						
IDC (mA)	285 (MAX)	TEST FREQ						
TEST INSTRUMENTS								
Q METER: HP 4342A								
CORE	P9 DRWW 2.3×4		APPROVED BY 					
WIRE	φ 0.08mm		CHECKED BY 					
WINDING	49 Ts		DRAWN BY 					

**CORE MASTER ENTERPRISE CO., LTD.**

TEL: 886-2-8919-1288    FAX: 886-2-8919-1298    WEB: www.coremaster.com.tw