

# SPECIFICATION FOR APPROVAL



**CUSTOMER** Akizuki Denshi Tsusho Co., Ltd

**CUSTOMER'S DWG NO.** \_\_\_\_\_

**CUSTOMER'S PART NO** \_\_\_\_\_

**OUR DWG NO.** IT1253657

**QUANTITY** \_\_\_\_\_ **DATE:** 12-JULY-2010

**ITEM.** AL0410-1R0K

	✓	CUSTOMER'S SIGNATURE	NOTE
FULL APPROVED			
CONDITIONAL APPROVED			
REJECTED			

PLEASE RETURN AFTER APPROVING



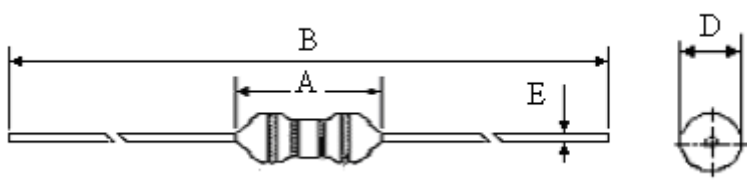



**CORE MASTER ENTERPRISE CO., LTD.**

**TAIWAN: 7F-1, No.129, Lane 235, Baoqiao Rd., Xindian City,  
Taipei County 231, Taiwan (R.O.C.)**

**TEL:886-2-89191288 FAX:886-2-89191298**  
**<http://www.coremaster.com.tw>**

**CHINA: YULIAN, QINGXI TOWN, DONGGUAN, GUANGDONG, CHINA**  
**TEL:86-769-86950588 FAX:86-769-86950587**

# SPECIFICATION FOR APPROVAL

CUSTOMER :			DATE :					
PART NO : AL0410-1R0K			DWG.NO : IT1253657					
CUSTOMER PART NO :			CUST.DWG.NO :					
(1) DIMENSION (UNIT:mm)  			A	12.0 (MAX)	m/m			
			B	62.0 ± 6.00	m/m			
			D	4.0 (MAX)	m/m			
			E	0.6 ± 0.05	m/m			
			F		m/m			
			G		m/m			
			H		m/m			
			I		m/m			
			J		m/m			
			K		m/m			
			(2) ELECTRICAL REQUIREMENTS					
			L (uH)	1 ± 10%	TEST FREQ			
Q	40 (MIN)	TEST FREQ	25.2 MHz					
RDC (Ω)	0.15 (MAX)	TEST FREQ						
IDC (mA)	900 (MAX)	TEST FREQ						
TEST INSTRUMENTS								
Q METER:HP 4342A								
CORE	PH8B DRWW 3×6		APPROVED BY 					
WIRE	φ 0.12mm		CHECKED BY 					
WINDING	10 Ts		DRAWN BY 					

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB: www.coremaster.com.tw