


# 参考資料

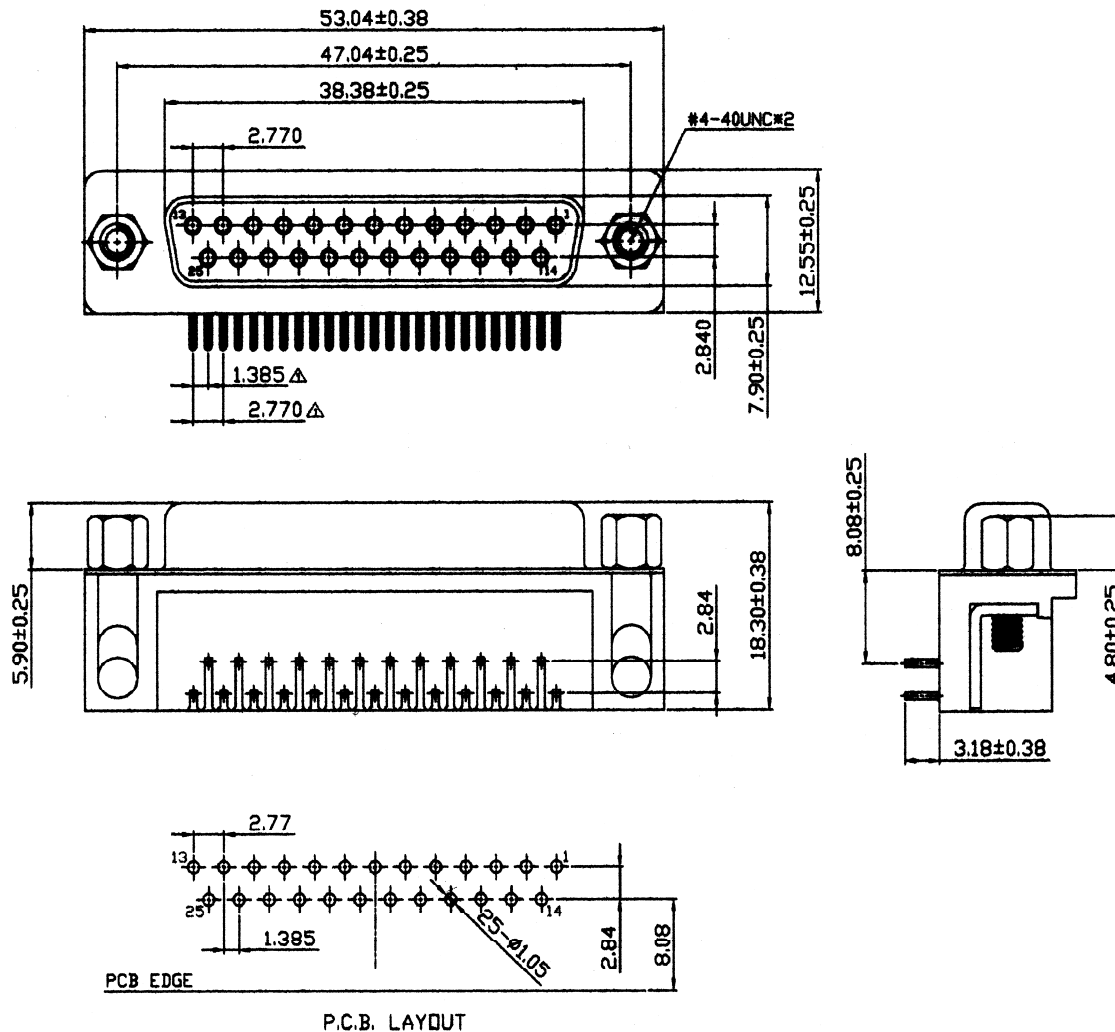

### Material :

Insulator : PBT Glass-fiber reinforced, UL 94V-0  
 Shell : SPCC, Nickel or Tin plated  
 Contact : Brass, Gold flash plated  
 L Bracket: SPCC, Nickel plated  
 Screw: SPCC, Nickel plated

### Specification :

Current Rating : 2 Amp  
 Insulation Resistance : 1,000 Mohm min. at DC 500V  
 Contact resistance : 15 mOhm max.  
 Dielectric Voltage : AC 500V for 1 minute  
 Operation temperature : - 55°C ~ + 105°C

P/N	Poles	Gender	Options
C-00647	25	Female	#4-40 screws
C-00165	25	Female	M2.6 screws

E				Drawn	General Tolerance			<b>Akizuki Denshi Tsusho Co., Ltd.</b>		
D					.0	.00	.000			
C				Checked	±0.40	±0.30	±0.20	Title : D-Sub R/A PCB type, 25way Female L bracket through hole, Screws locked		
B					Unit : mm			Part No. <b>C - 00647, C - 00165</b>		
A				Appraisal	Scale :			File No. :		
Rev.	Date	File	BY		Sheet :			UIC-DMR-25SGG		