



昌隆科技股份有限公司

GO FORWARD ENTERPRISE CORP.




ADAPTER-18W

GF18-US_{TYPE}

DESCRIPTION:

- U.S.A / JAPAN / TAIWAN
- Wall Mount Type
- Meet CEC Regulations
- ROHS Compliance
- No Load Power Consumption
Less than 0.3W

Green Mode

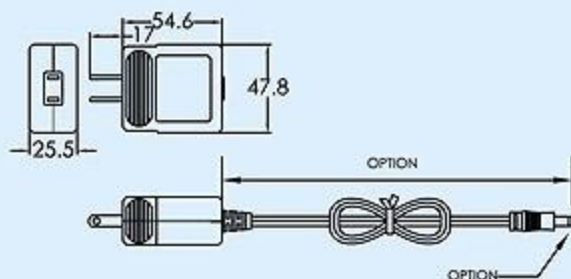

Dimensions:

LxWxH: 54.6x47.8x25.5 (mm)

Model	INPUT	OUTPUT	
GF18-US0530	90-264VAC (47-63HZ)	5V	3.0A
GF18-US0628		6V	2.8A
GF18-US0724		7V	2.4A
GF18-US0920		9V	2.0A
GF18-US1215		12V	1.5A
GF18-US1512		15V	1.2A
GF18-US24075		24V	0.75A

GENERAL SPECIFICATIONS:

Maximum Output Power:	18W
Input Voltage:	90~264Vac
Input Frequency:	47Hz~63Hz
Input Current:	0.43A
Leakage Current (max):	0.25mA
Efficiency:	78%
Ripple Noise (max):	240mVp-p
Line Regulation:	±1%
Load Regulation:	±5%
Hold-Up Time:	10mS
Over Voltage Protection:	120%
Over temperature Protection	
Operating Temperature:	0~40°C
Operating Relative Humidity:	5~95%RH
Storage Temperature:	-20~80°C
Storage Humidity:	10~95%RH
Withstand Voltage:	3Kv/min
Weight:	103g
Cable type:	UL2468 18AWG or 20AWG