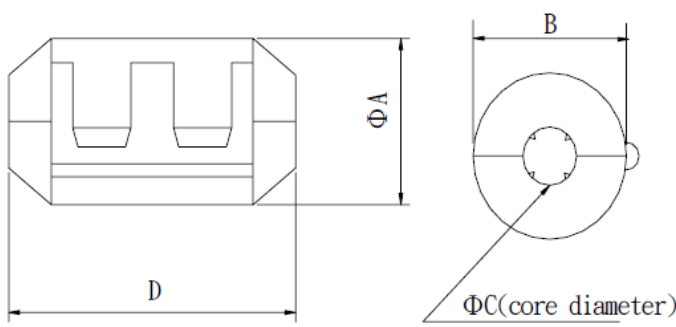


# SPECIFICATION FOR APPROVAL

CUSTOMER:				DATE:			
PART NO: LF – 35B (B8)				DWG.NO: CT2110415K5A			
CUSTOMER PART NO:				CUST.DWG.NO:			
(1) DIMENSION(UNIT:mm)  				A	15.0 ± 1.0	m/m	
				B	15.0 ± 1.0	m/m	
				C	4.0 ± 0.2	m/m	
				D	25.2 ± 1.0	m/m	
				E		m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				J		m/m	
				(2) ELECTRICAL REQUIREMENTS			
Z	MIN 55 OHM	TEST FREQ	25 MHz	B:BLACK W:WHITE G:GRAY			
Z	MIN 95 OHM	TEST FREQ	100 MHz				
Z	MIN OHM	TEST FREQ	MHz				
Z	MIN OHM	TEST FREQ	MHz				
(4) TEST INSTRUMENTS							
HP E4286A							
MATERIAL (ui)	800 ± 25%			APPROVED BY			
CORE	UH-8.4×15.5×3.8			吳載敏			
WIRE	φ 0.65 × 100 mm			CHECKED BY			
WINDING	1 Ts			張明德			
				DRAWN BY			
				Vivian			

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER :				DATE :					
PART NO: LF - 35B (B8)				DWG.NO: CT2110415K5A					
CUSTOMER PART NO :				CUST.DWG.NO :					
IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C	D	E	
SPEC	MIN 55 OHM	MIN 95 OHM		15.0 ± 1.0	15.0 ± 1.0	4.0 ± 0.2	25.2 ± 1.0		
1	62	118		15.35	14.96	4.06	25.46		
2	62	118		15.40	14.97	4.05	25.47		
3	65	120		15.46	14.96	4.01	25.49		
4	66	119		15.36	14.97	4.03	25.49		
5	63	120		15.34	14.95	4.07	25.48		
6	63	119		15.42	14.95	4.02	25.50		
7	62	118		15.38	14.98	4.01	25.47		
8	65	118		15.35	14.97	4.05	25.48		
9	65	120		15.39	14.98	4.03	25.49		
10	63	121		15.32	14.95	4.01	25.48		
X	64	119		15.38	14.96	4.03	25.48		
R	4	3		0.14	0.03	0.06	0.04		
REMARK: 產品不能有明顯缺陷、污損；產品缺口長、寬在 0.6mm 以下， 深在 0.6mm 以下。						APPROVED BY 吳載敏			
						CHECKED BY 張明德			
						DRAWN BY Vivian			

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# LF-35B (B8)

