


■Features

- High Lumen LEDs
- 5mm Round Standard Directivity
- UV Resistant Epoxy
- Water Clear Type

■Applications

- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■Outline Dimension

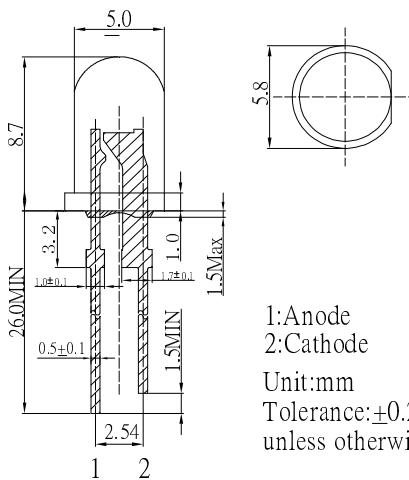

1:Anode
2:Cathode
Unit:mm
Tolerance: $\pm 0.20\text{mm}$
unless otherwise noted


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
DC Forward Current	I _F	80		mA
Pulse Forward Current#	I _{FP}	120		mA
Reverse Voltage	V _R	5		V
Power Dissipation	P _D	288		mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

■Directivity

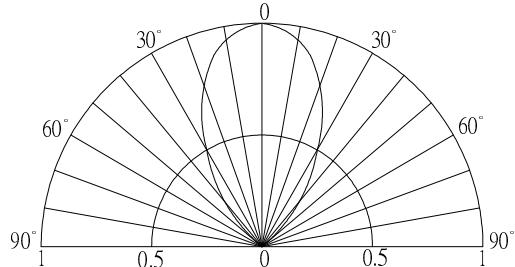

■Electrical -Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage*1	V _F	I _F =75mA	2.8	3.2	3.6	V
DC Reverse Current	I _R	V _R =5V	-	-	10	μA
Luminous Flux*2	Φ _V	I _F =75mA	4	5	-	lm
Luminous Intensity*3	I _v	I _F =75mA	10000	12000	-	mcd
Domi. Wavelength*4	λ _D	I _F =75mA	465	470	475	nm
50% Power Angle	2θ _{1/2}	I _F =75mA	-	60	-	Deg

*1 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$

*2 Tolerance of measurements of luminous flux is $\pm 15\%$

*3 Tolerance of measurements of luminous intensity is $\pm 15\%$

*4 Tolerance of measurements of dominant wavelength is $\pm 1\text{nm}$

LED & Application Technologies



InGaN LED

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

