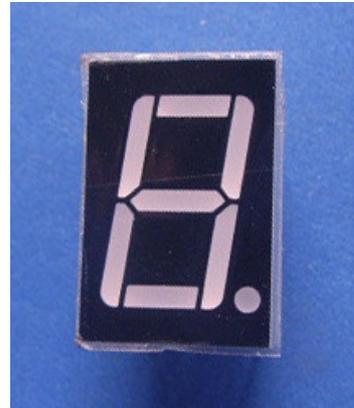


**■ Features**

- High luminous LEDs
- Long lifetime operation
- IC compatible
- Low power dissipation
- Black surface & white segment or dot

**■ Applications**

- Counting device
- Clock

**■ Photo**

**■ Absolute Maximum Rating (Ta=25°C)**


Item	Symbol	Value	Unit
DC Forward Current	$I_F$	20	mA
Pulse Forward Current*	$I_{FP}$	100	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	$P_t$	40	mW
Operating Temperature	$T_{opr}$	-30 ~ +70	°C
Storage Temperature	$T_{stg}$	-40~ +85	°C
Lead Soldering Temperature(1.6mm from seating plane)	$T_{sol}$	260°C/5sec	°C

**■ Electrical -Optical Characteristics (Ta=25°C)**

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	$V_F$	$I_F=20mA$	-	2.1	2.5	V
DC Reverse Current	$I_R$	$V_R=5V$	-	-	20	$\mu A$
Domi. Wavelength*	$\lambda_D$	$I_F=20mA$	-	625	-	nm
Luminous Intensity*	$I_v$	$I_F=20mA$	-	90	-	mcd

\*1 Tolerance of dominant wavelength is  $\pm 1nm$

\*2 Tolerance of luminous intensity is  $\pm 15\%$

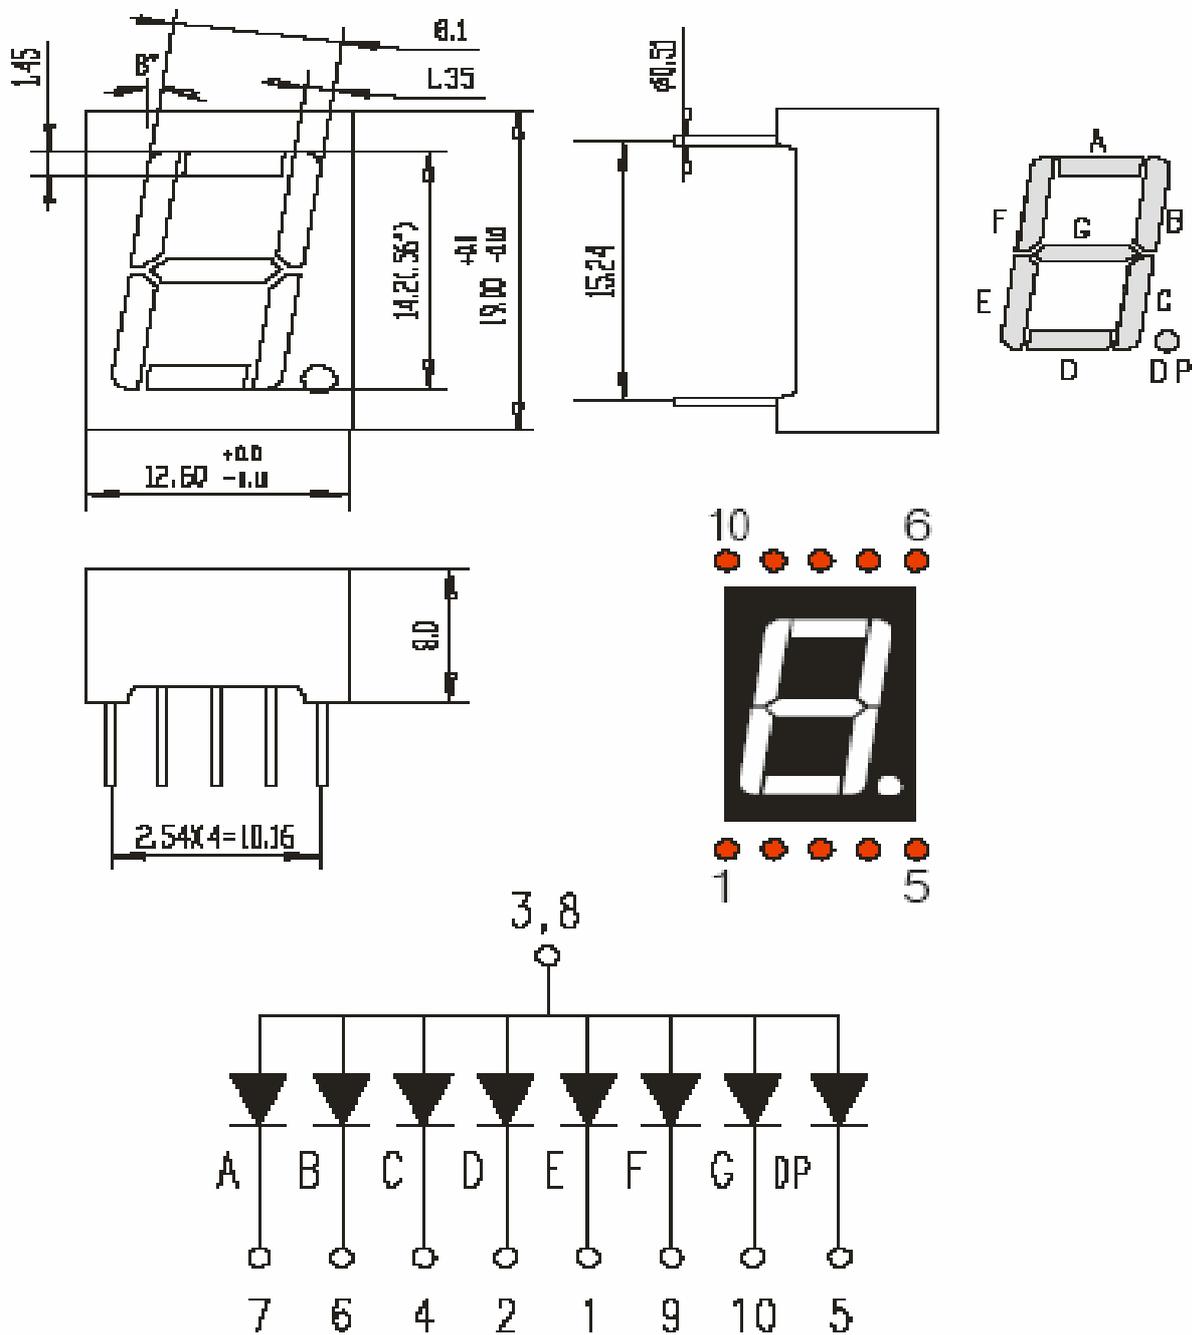**■ Package dimensions and pin function**


管脚顺序：从数码管的正面观看,见图。

图中所有尺寸单位为 mm；未标注误差范围的尺寸误差范围为  $\pm 0.25\text{mm}$ 。