MR 16

Replaceable for conventional hallogen lamp, offer long life time, high efficience, eco-friendly products.

Applications

Spot lighting for display, decorating light, office, school, conference room etc.

Eco-friendly

Differenciated from conventional lights, hazardous substances like CO2, mercury etc, are extremely reduced, and neither harmful electromagnetic wave nor ultraviolet ray is emitted.

Heat dissipation design

Unique design considering effective heat dissipation (Design registration applied).

Energy saving

Save energy with low power consumption.

Long life time

Save maintenance cost with long life time.


High brightness

With rated voltage & constant current drive IC, offer constant brightness against unstable environments.

Model NO	Power Consumption[W]	Input Voltage[V]	Luminous Flux[lm]	Illuminance[lx]:1m	Luminous Efficacy[lm/W]	Color Rendering Index[CRI]
OSLA03X3W00	3.8	AC/DC 12	270	800	Min 55	75


OPTICAL SYSTEM

SIZE: 50(Φ)X 54(H) HOUSING: ALUMINIUM die casting OPERATING TEMPERTURE: -20°C~+40°C WEIGHT: 49g **LIFE TIME:** 50,000Hrs **BASE TYPE:** GU 5.3 **BEAM ANGLE(20¹/₂):** 30° **COLOR TEMPERTURE:** 6500K



Relative Luminous Intensity 1v

DIMENSION

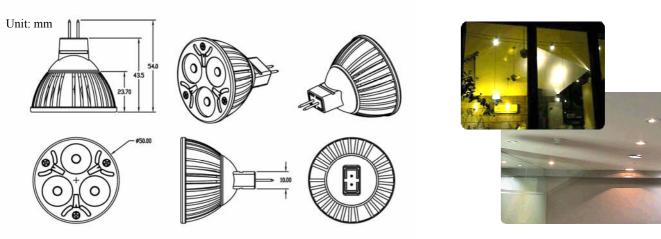

www.optosupply.com

Optosupply Limited VER A.1