



RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

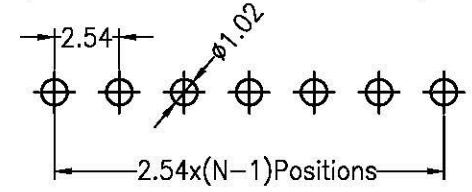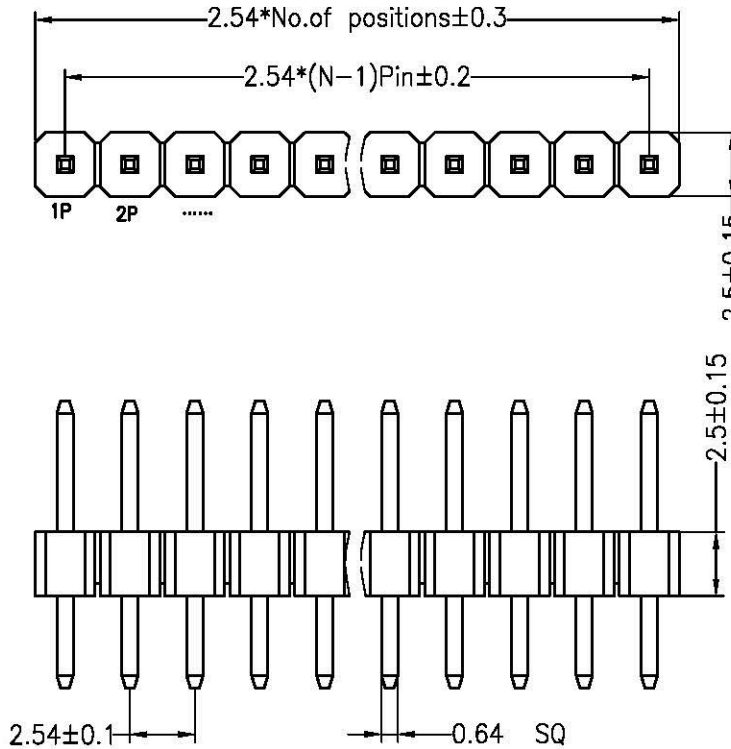

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT
				DIM	TOL					
A0	2012.03.28	NEW DRAWING		X.X	±0.30	CHECK			UNIT	mm
				X.XX	±0.20					
				X.XXX	±0.10					
				Angle	±3°	APPROVE			SHEET	1/1
									PROJ.	◆

Enn.CORP 長榮有限公司
 TEL:02-26945824 FAX:02-26946971

PART NO. PH-1xXXSG

TITLE: 2.54mm Pin Header 2.5mm Single 180°