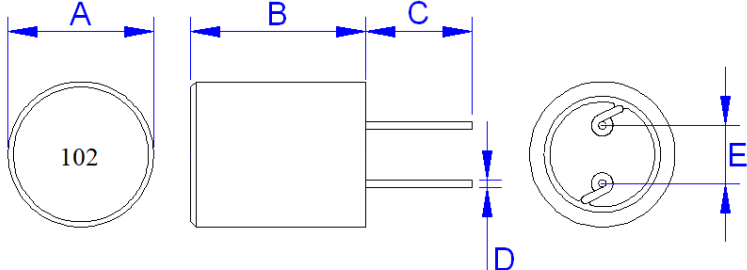



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: SRC1317-102M+M		DWG.NO: FX20122212
CUSTOMER PART NO:		CUST.DWG.NO:
(1) DIMENSION(UNIT: mm) 		A 13.0 (MAX) m/m
		B 15.0 (MAX) m/m
		C 5.0 ± 1.00 m/m
		D 0.8 (REF) m/m
		E 5.0 (REF) m/m
		F m/m
		G m/m
		H m/m
(2) ELECTRICAL REQUIREMENTS		(3) SCHEMATIC
L (mH)	1.0 ± 20%	
RDC (Ω)	1.3 (MAX)	
IDC (A)	0.9 (MAX)	
TEST CONDITION	1KHz / 0.25V	
(4) MATERIAL LIST		
NO/ITEM	MATERIAL	SUPPLIER
CORE	DR2W9X10S B=6.0 P12.4X14 OR EQU	HORNG YIH OR EQU
WIRE TYPE	2UEW φ 0.23mm OR EQU	ELEKTRISOLA OR EQU
WINDING	95.5 TS (REF)	
TUBE	φ 9× 12mm OR EQU	DONG GUAN SALIPT OR EQU
		APPROVED BY 吳載敏
		CHECKED BY 張明德
		DRAWN BY Vicky

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: SRC1317-102M+M				DWG.NO: FX20122212				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (mH)	RDC (Ω)	IDC (A)	A	B	C	D	E
SPEC	1.0 ± 20%	1.3 (MAX)	0.9 (MAX)	12.8 (MAX)	15.0 (MAX)	5.0 ± 1.0	0.8 (REF)	5.0 (REF)
1	1.00	0.99	OK	12.10	13.93	4.98	0.81	5.01
2	1.02	1.04	OK	12.69	13.60	4.98	0.79	5.07
3	1.00	1.02	OK	12.66	14.19	4.91	0.79	5.00
4	1.04	1.01	OK	12.53	13.84	4.90	0.81	5.10
5	0.99	1.04	OK	12.51	14.30	5.01	0.80	4.97
6	1.02	1.02	OK	12.41	14.01	5.01	0.80	5.02
7	1.03	1.01	OK	12.40	14.03	5.02	0.80	5.01
8	1.05	1.04	OK	12.26	14.30	5.00	0.81	5.03
9	1.03	1.03	OK	12.27	14.26	4.97	0.80	4.92
10	1.04	1.00	OK	12.70	14.00	5.08	0.81	5.12
X	1.02	1.02		12.45	14.05	4.99	0.80	5.03
R	0.06	0.05		0.60	0.70	0.18	0.02	0.20
TEST INSTRUMENTS VR113 VR712						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw