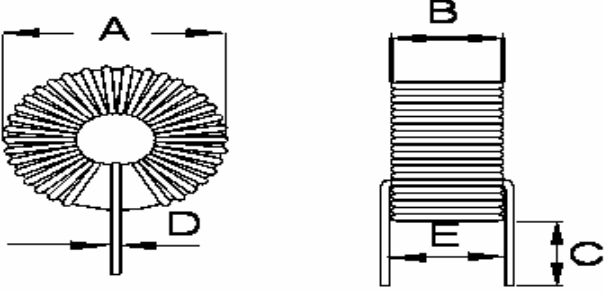



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: TCV-331M-9A-8026		DWG.NO: HX1513032
CUSTOMER PART NO:		CUST.DWG.NO:
(1) DIMENSION(UNIT: mm) 		A 25 (MAX) m/m
		B 12 (MAX) m/m
		C 10 ± 2.00 m/m
		D 0.9 ± 0.05 m/m
		E 10 (REF) m/m
		F m/m
		G m/m
		H m/m
		(2)ELECTRICAL REQUIREMENTS
L (uH)	330 ± 20%	
RDC (mΩ)	80 (MAX)	
IDC (A)	9 (MAX)	
TEST CONDITION	1KHZ / 0.25V	
Operating Temp.	-20°C~+105°C	
(4)MATERIAL LIST		
NO/ITEM	MATERIAL	SUPPLIER
CORE	T80-26 或同等級	紅日
WIRE TYPE	2UEW φ 0.9mm 或同等級	PACIFIC
WINDING	77.5 TS (REF)	
		APPROVED BY 吳載敏
		CHECKED BY 張明德
		DRAWN BY Summer

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: TCV-331M-9A-8026				DWG.NO: HX1513032				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHZ / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (mΩ)	IDC (A)	A	B	C	D	E
SPEC	330 ± 20%	80 (MAX)	9 (MAX)	25(MAX)	12 (MAX)	10 ± 2.00	0.9 ± 0.05	10 (REF)
1	335.62	67.52	OK	23.95	11.42	10.25	0.92	10.20
2	334.56	67.48	OK	23.96	11.46	10.25	0.92	10.21
3	335.65	67.53	OK	23.95	11.43	10.25	0.92	10.23
4	335.63	67.58	OK	23.94	11.42	10.24	0.91	10.24
5	335.62	67.51	OK	23.96	11.42	10.23	0.92	10.23
6	336.53	67.86	OK	23.95	11.42	10.26	0.92	10.23
7	336.35	67.59	OK	23.96	11.42	10.23	0.93	10.25
8	336.35	67.53	OK	23.98	11.45	10.24	0.93	10.12
9	336.35	67.58	OK	23.98	11.42	10.25	0.91	10.13
10	335.65	67.82	OK	23.96	11.43	10.28	0.92	10.15
X	335.83	67.60		23.96	11.43	10.25	0.92	10.20
R	1.97	0.38		0.04	0.04	0.05	0.02	0.13
TEST INSTRUMENTS CH-1062LCR 502BC						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY Summer		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw