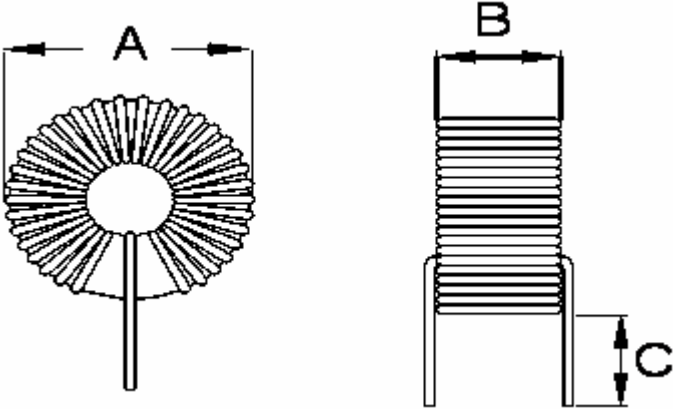









# SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: TCV-680M-3A-5026		DWG.NO: HX6508183	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm)  		A	15.0 (MAX) m/m
		B	7.0 (MAX) m/m
		C	10.0 ± 2.0 m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2) ELECTRICAL REQUIREMENTS	
L (uH)	68 ± 20%		
RDC (Ω)	0.3 (MAX)		
IDC (A)	3 (MAX)		
TEST CONDITION	1KHZ / 0.25V		
(4) REMARK CORE:T50-26 WIRE:2UEW Φ0.5mm TURN:38.5TS (REF)		APPROVED BY 	
		CHECKED BY 	
		DRAWN BY 	

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER:				DATE:					
PART NO: TCV-680M-3A-5026				DWG.NO: HX6508183					
CUSTOMER PART NO:				CUST.DWG.NO :					
TEST CONDITION: 1KHZ / 0.25V				DIMENSION (UNIT : mm)					
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C			
SPEC	68 ± 20%	0.3 (MAX)	3 (MAX)	15.0 (MAX)	7.0 (MAX)	10.0 ± 2.0			
1	67.53	0.183	OK	14.42	6.23	10.08			
2	67.27	0.182	OK	14.39	6.28	10.24			
3	67.38	0.181	OK	14.41	6.21	10.23			
4	67.49	0.184	OK	14.40	6.24	10.22			
5	67.21	0.180	OK	14.37	6.20	10.16			
6	67.38	0.181	OK	14.41	6.21	10.23			
7	67.49	0.184	OK	14.40	6.24	10.22			
8	67.53	0.183	OK	14.40	6.24	10.22			
9	67.27	0.182	OK	14.37	6.20	10.16			
10	67.53	0.183	OK	14.42	6.23	10.08			
$\bar{X}$	67.408	0.182		14.399	6.228	10.184			
R	0.32	0.004		0.05	0.08	0.16			
TEST INSTRUMENTS CH-1062LCR						APPROVED BY			
						CHECKED BY			
						DRAWN BY			

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw