
| 规 格 承 认 书 | | | | | | 规格书编号 2011101401 | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------|----|-----------------|-------|---------------------|--|
| 品名 | 6X6X6.0Thro | ıgh Hole | 型号 | THDP07-0 | 060CB | 1/10 | |
| 1.General specification 基本说明 1.1 Scope 范围 This specification covers the requirements for single key switches which have no key top(TACT SWITCHES:MECHANICAL CONTACT).此规范含盖单推柄和无推柄的轻触开关要求 | | | | | | | |
| 1.2 | 1.2 Operating Temperature Range 使用温度范围 -20 to+70℃(normal humidity, normal press.) 正常湿度,标准压力 | | | | | | |
| 1.3 Storage Temperature Range 保存温度范围 -40 to+85℃(normal humidity, normal press.) | | | | | | | |
| 1.4 Test Conditions 测试条件 Tests and measurements shall be made in the following standard conditions unless otherwise specified: 测试和计量按下列标准条件除非特殊说明 Normal temperature (temperature 5 to 35℃) 标准温度 Normal humidity (relative humidity 45 to85%) 正常湿气 Normal pressure (pressure 860 to 1060 mbars) 标准压力 In case any question arises from the judgment made, tests shall be conducted in the following conditions: Temperature (20±2℃) 温度 Relative humidity (65±5%) 相对湿度 | | | | | | | |
| Pressure (860 to 1060 mbars) 压力 2.TYPE OF ACTUATION 动作类型 | | | | | | | |
| <u>Tactile feedback</u> 轻触返回 | | | | | | | |
| 3.CONTACT ARRANGEMENT _1_poles_1_throws 接触形式 1接点1回路 | | | | | | | |
| (Details of contact arrangement are given in the assembly drawings.) 细接点形式在装配图中 | | | | | | | |
| 4.MAX | IMUM RATINGS | | | <u>0</u> mA 最大額 | | | |

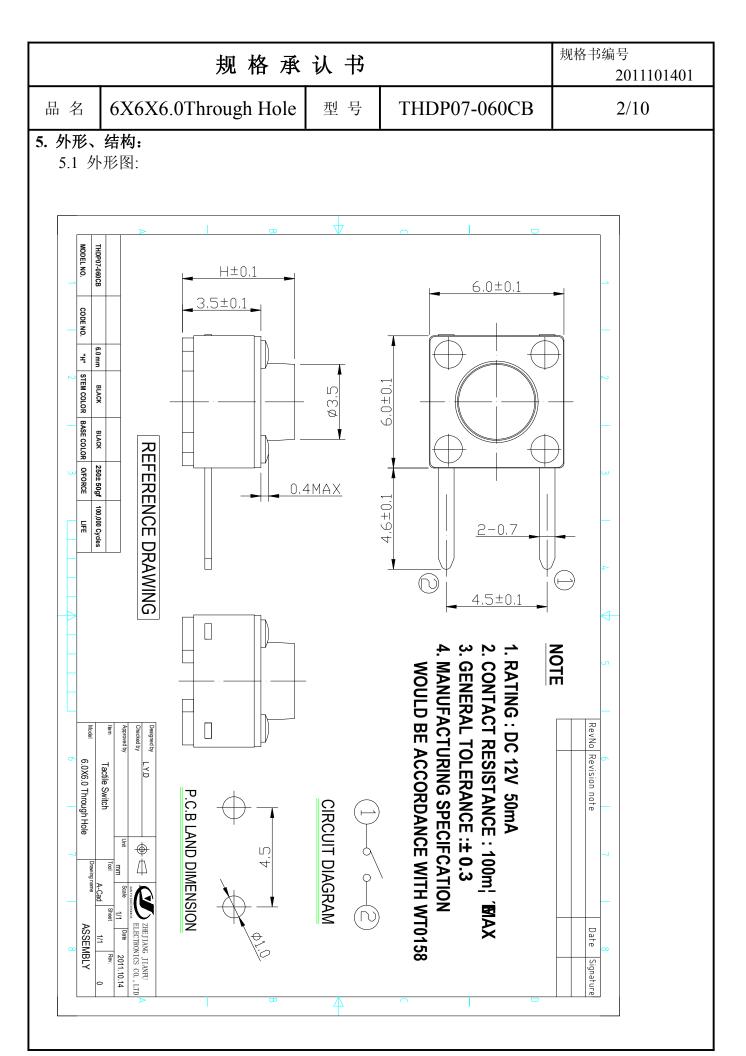

ZHEJIANG JIANFU ELECTRONICS CO., LTD