



DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

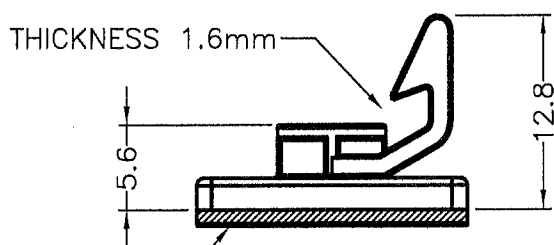

REVISIONS			
REV	DESCRIPTION	DATE	BY

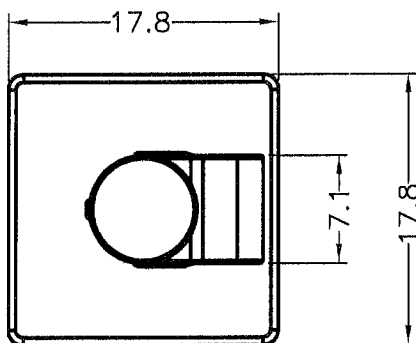

3M DOUBLE ADHESIVE TAPE

- NOTE: 1. The Height is not include the releasing paper and adhesive tape's thickness.  
 2. Cutted face can't be very smooth, due to by hand-cutting.  
 3. All measurement does not include gate which raises under 0.3mm.

PART NO.	3M DOUBLE ADHESIVE TAPE
ULCK-6.4	3M THINCKNESS=1.1mm
ULCK-6.4(3M)	3M THINCKNESS=0.9mm

<div><p>ISO 9001 ISO 14001 QC 090000</p></div> <div>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</div>				TITLE SPACER SUPPORT		SPEC. DWG	
				MATERIAL NYLON 66 UL94V-2	DATE 2008.12.09		
				FINISH	DRAWN Ken		
PART NUMBER SEE ABOVE				COLOR NATURAL	CHECK 		
				DRAWING NUMBER ULCK-6.4			
SIZE A4	SCALE 2:1	UNIT mm	REV C	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE	APPROVED 