




ZIF SOCKET

ULO-ZS431

PITCH: 2.54mm

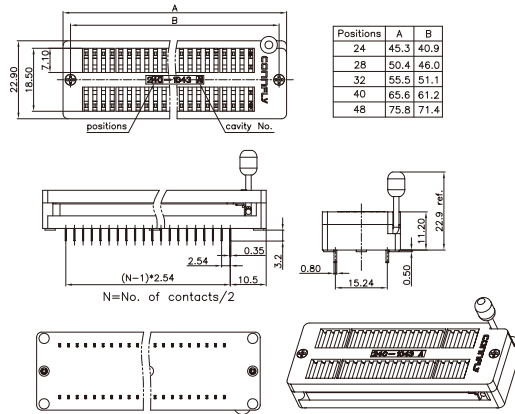

Specification

Rating:	50VDC,100mA
Insulation Resistance:	1000M Ω Min
Dielectric Withstanding Voltage:	500V AC Min. for 60 Seconds.Copacitance Between adjacent Contacts.
Contact Resistance:	50m Ω Max.
Operating Temperature:	-25°C~+70°C
Storage Temperature:	-40°C~+85°C
Durability:	5,000 Cycles(With Load)
Humidity:	95%RH,40°C For 48Hrs
Solderability:	After Flux 230°C For 5±0.5 Seconds,95% Coverage
Soldering Heat:	260±5°C For 5±1 Seconds.
Material	
Insulator:	Thermoplastic.
Contact:	Copper alloy.

HOW TO ORDER

