
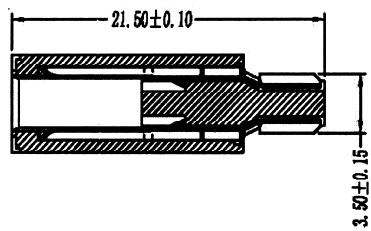
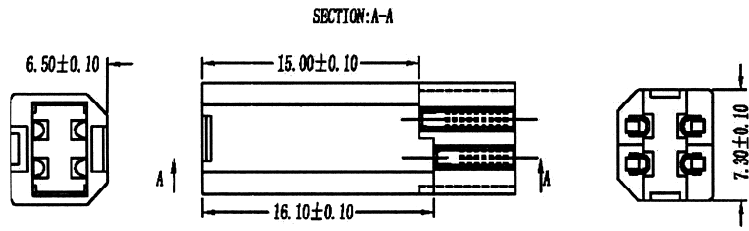

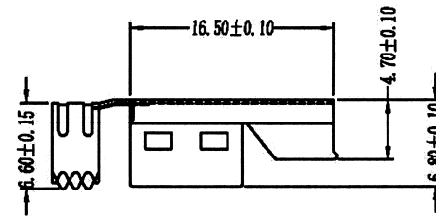
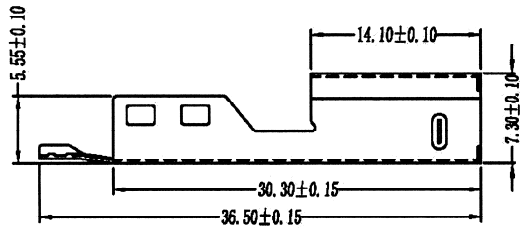


RoHS Compliant

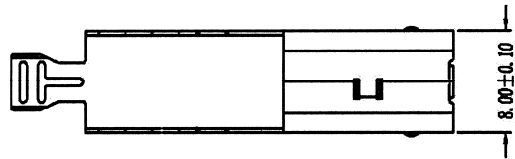

Material

Contacts: C2680 EH, T = 0.20, Nickel plated 150u" or Gold plated

Insulator: PBT

Shell: SPCC, T = 0.35,

Nickle plated 60u" ~ 80u" over CU plated 80u" ~ 100u"

E				Drawn:	General Tolerance		
D				Jack Lin	.0	.00	.000
C				Checked:	± 0.10	± 0.05	± 0.02
B				Ivy Lee	Unit : mm		
A	25-Jan-14	new release	Jack	Appraisal:	Scale :		
Rev.	Date	File	BY	Simon Chen	Sheet : 1/1		



Useconn
Electronics Ltd.

Part No.

USB-4BM107AS

File No. CE-USB-4BM107AS

Title: USB solder type for Cable assembly
4P B type Male, long shell type