



DIP ----- ZTT SERIES CERAMIC RESONATOR SPECIFICATION

1. SCOPE

This specification shall cover the characteristics of the ceramic resonator with the type ZTT12.00MT-22P

2. PART NO. : ZTT12.0MT-22P


3. OUTLINE DIMENSIONS AND MARK

3.1 Appearance: No visible damage and dirt.

3.2 Construction: Leads are soldered on electrode and body is molded by resin.

3.3 The products conform to the RoHS directive and national environment protection law.

3.4 Dimensions and mark

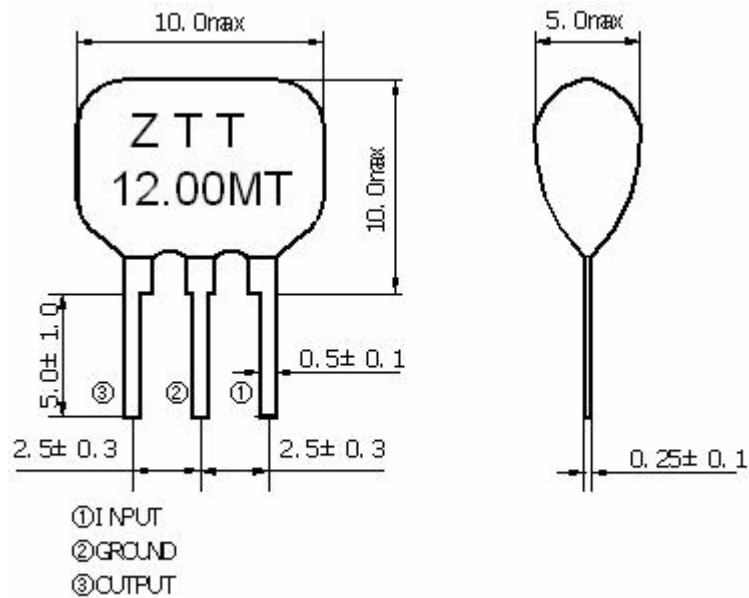

4. ELECTRICAL SPECIFICATIONS

4.1 RATING

Items	Requirement
Withstanding Voltage (V)	50 (DC, 1min)
Insulation Resistance Ri, (MΩ) min.	500 (10V, 1min)
Operating temperature	-25°C ~ 85°C
Storage temperature	-55°C ~ +85°C
Rating Voltage UR (V)	6V DC
	15V p-p

4.2 ELECTRICAL SPECIFICATIONS

Items	Requirement
Oscillation Frequency Fosc (MHz)	12.000
Frequency Accuracy (%)	±0.5
Resonant Impedance Ro (Ω) max.	25
Temperature Coefficient of Oscillation Frequency (%) max.	±0.3 (Oscillation Frequency drift, -25°C ~ +85°C)
Oscillation Frequency Aging Rate (10years) (%) max *	±0.3 (From initial value)


* Components shall be left in a chamber of +85±2°C for 1000 hours, then measured after leaving in natural condition for 1 hour.

5. TEST

5.1 Test Conditions

Parts shall be tested under the condition (Temp.: 20±15°C, Humidity : 65±20% R.H.) unless the standard condition (Temp.: 25±2°C, Humidity : 65±5% R.H.) is regulated to measure.

5.2 Test Circuit

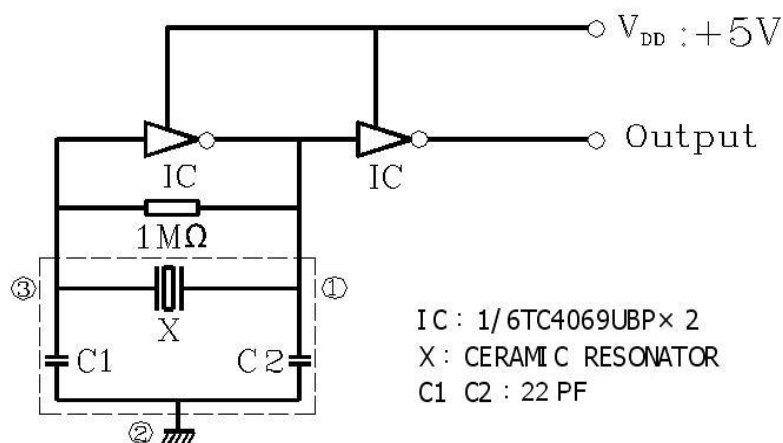



DIP ----- ZTT SERIES CERAMIC RESONATOR SPECIFICATION

6 PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

No.	Item	Condition of Test		Performance Requirement
6.1	Humidity	Subject the resonator at $40 \pm 2^{\circ}\text{C}$ and 90%-95% R.H. for 500h, resonator shall be measured after being placed in natural conditions for 1h.		It shall fulfill Table 1.
6.2	High Temperature Exposure	Subject the resonator to $85 \pm 2^{\circ}\text{C}$ for 500h, resonator shall be measured after being placed in natural conditions for 1h.		It shall fulfill Table 1.
6.3	Low Temperature Exposure	Subject the resonator to $-55 \pm 2^{\circ}\text{C}$ for 500h, resonator shall be measured after being placed in natural conditions for 1h.		It shall fulfill Table 1.
6.4	Temperature Cycling	After temperature cycling of blow table was performed 5 times, resonator shall be measured after being placed in natural conditions for 1h.		It shall fulfill Table 1.
		Temperature	Time	
		$-25 \pm 3^{\circ}\text{C}$	$30 \pm 3 \text{ min}$	
		$85 \pm 3^{\circ}\text{C}$	$30 \pm 3 \text{ min}$	
6.5	Vibration	Subject the resonator to vibration for 2h. Each in x y and z axis with the amplitude of 1.5mm, The frequency shall be varied uniformly between the limits of 10Hz-55Hz and then resonator shall be measured.		It shall fulfill Table 1.
6.6	Mechanical Shock	Resonator shall be measured after 3 times random dropping from the height of 1m on concrete floor.		No visible damage and it shall fulfill Table 1.
6.7	Resistance to Soldering Heat	Lead terminals are immersed up to 2 mm from resonator's body in soldering bath of $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for $10\text{s} \pm 1\text{s}$ and then resonator shall be measured after being placed in natural conditions for 1h.		It shall fulfill Table 1.
6.8	Solderability	Lead terminals are immersed up to 2mm from resonator's body in soldering bath of $250^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for $3\text{s} \pm 0.5\text{s}$.		More than 95% of the terminal surface of the filter shall be covered with fresh solder.



DIP ----- ZTT SERIES CERAMIC RESONATOR SPECIFICATION

6. ENVIRONMENTAL TEST

No.	Item	Condition of Test	Performance Requirements
6.9	Terminal Strength		
6.9.1	Terminal Pulling	Force of 5N is applied to each lead in axial direction for $10s \pm 1s$.	
6.9.2	Terminal Bending	When force of 5N is applied to each lead in axial direction, the lead shall be folded up 90° from the axial direction and folded back to the axial direction. The speed of folding shall be each 3s.	No visible damage and it shall fulfill Table 1.

Table 1

Item	Specification after test
Oscillation Frequency Change $\Delta f_{osc}/f_{osc}$ (%) max.	± 0.3
Resonant Impedance R_o (Ω) max.	25
The limits in the above table are referenced to the initial measurements.	

7. OTHER

7.1 Caution

7.1.1 Don't apply excess mechanical stress to the component and terminals at soldering. Do not use this product with bend.

7.1.2 Do not clean or wash the component for it is not hermetically sealed.

7.1.3 Do not use strong acidity flux, more than 0.2wt% chlorine content, in flow soldering.

7.1.4 Don't be close to fire.

7.1.5 All kinds of re-flow soldering must not be applied on the component.

7.1.6 This specification mentions the quality of the component as a single unit. Please insure the component is thoroughly evaluated in your application circuit

7.1.7 Expire date (Shelf life) of the products is 12 months after delivery under the conditions of a sealed and an unopened package. Please use the products within 12 months after delivery. If you store the products for a long time (more than 12 months), use carefully because the products may be degraded in the solderability or rusty. Please confirm solderability and characteristics for the products regularly.

7.1.8 Please contact us before using the product as automobile electronic component.

7.2 Notice

7.2.1 Please return one of this specification after your signature of acceptance.

7.2.2 When something gets doubtful with this specifications, we shall jointly work to get an agreement.