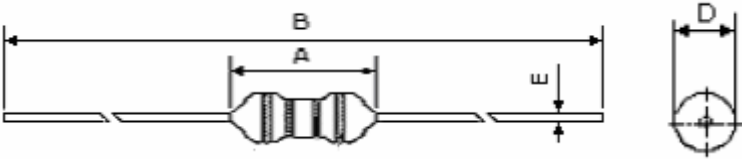



SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :			
PART NO : AL0510-680K				DWG.NO : IT2220421			
CUSTOMER PART NO :				CUST.DWG.NO :			
(1) DIMENSION (UNIT: mm) 				A	14.0 (MAX)	m/m	
				B	62.0 ± 6.00	m/m	
				D	5.0 (MAX)	m/m	
				E	0.6 ± 0.05	m/m	
				F		m/m	
				G		m/m	
				H		m/m	
				I		m/m	
				J		m/m	
				K		m/m	
				(2) ELECTRICAL REQUIREMENTS			
L (uH)	$68 \pm 10\%$	TEST FREQ	1KHz/0.25V				
Q	20 (MIN)	TEST FREQ					
RDC (Ω)	0.68 (MAX)	TEST FREQ					
IDC (mA)	1200 (MAX)	TEST FREQ					
TEST INSTRUMENTS							
LCR101 / HP4342A							
CORE	DRWW 4x6			APPROVED BY 吳載敏			
WIRE	2UEW ϕ 0.15mm			CHECKED BY 張明德			
WINDING	63 Ts			DRAWN BY Vicky			

CORE MASTER ENTERPRISE CO., LTD.

TEL: 886-2-8919-1288 FAX: 886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO : AL0510-680K				DWG.NO : IT2220421					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	L (uH)	RDC (Ω)	IDC (mA)						
FREQ	1KHZ 0.25V								
SPEC	68 ± 10%	0.68 (MAX)	1200 (MAX)						
1	67	0.53	OK						
2	68	0.54	OK						
3	67	0.53	OK						
4	67	0.54	OK						
5	67	0.53	OK						
6	66	0.53	OK						
7	66	0.53	OK						
8	65	0.54	OK						
9	68	0.53	OK						
10	67	0.54	OK						
X	67	0.53							
R	3	0.01							
							APPROVED BY		
							吳載敏		
							CHECKED BY		
							張明德		
							DRAWN BY		
							Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw