



RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

MATERIALS :

1. HOUSING : P.B.T. (UL 94V-0), BLACK.
2. TERMINAL : t=0.40mm COPPER ALLOY, GOLD PLATING.

SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTAND VOLTAGE : 1,000V AC R.M.S. FOR 1 MINTUE.
3. INSULATION RESISTANCE : 5,000M OHMS MIN. AT 1,000V DC.
4. OPERATING TEMPERATURE : -55°C TO +105°C.

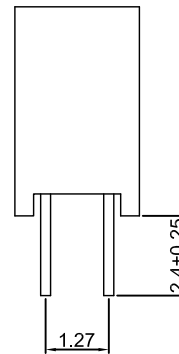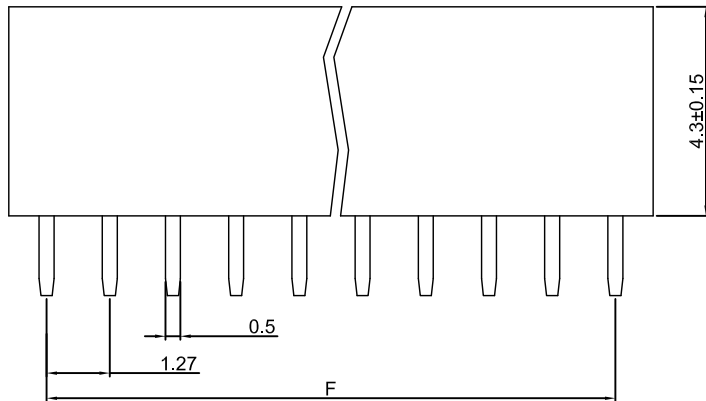

$$E = (\text{No. of Posotion Per Row}) \times 1.27 + 0.4 \pm 0.3$$

$$F = (\text{No. of Posotion Per Row} - 1) \times 1.27$$

How to order Please replace "X" with appropriate coding listed in the table below.

Part Number

FH11-2 * XXSG

Enn.corp Chang Enn Co., Ltd.

No.410, Fu-Teh 1st Road,
Shijr, Taipei County
221, Taiwan, R.O.C.

TEL:886-2-26945824

FAX:886-2-26946971

TITLE

PARTS NO.

DWG. NO.

1.27mm Female Header
Daul Row Straight Type

FH11-2*_SG

GENERAL
TOLERANCE

DIM:

X. ±0.30

X.X ±0.20

X.XX ±0.10

DRAWN

CHECK

APPROVE

SCALE

DATE

DATE

DATE

UNIT

2018/12/05

DATE

DATE

mm REV. A