


# Golden Power Corporation (HK) Ltd.





**MODEL No:** KR2000SC

**Description:** Ni-Cd 2000mAh SC size Rechargeable battery

## Specification

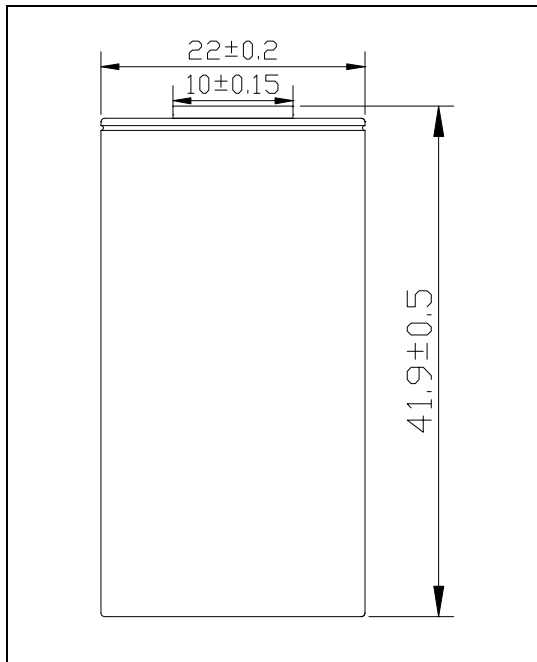

Nominal Capacity 额定容量		2000 mAh	
Nominal Voltage 额定电压		1.2 V	
Charge current 充电电流	Standard 标准	200mA	
	Quick 快充	600mA	
	Fast 急充	1000mA	
Charge time 充电时间	Standard 标准	14~16 Hrs	
	Quick 快充	4.0 Hrs	
	Fast 急充	2.4Hrs	
Ambient Temperature 使用温度	Charge 充电	Standard 标准	0°C~35°C
		Quick 快充	10°C~35°C
		Fast 急充	10°C~35°C
	Discharge 放电		-30°C~60°C
Storage 储存		-30°C~35°C	
Internal Impedance(mΩ) (Upon fully charge)充满电后内阻		Max ≤ 18	
Weight 重量		45g	

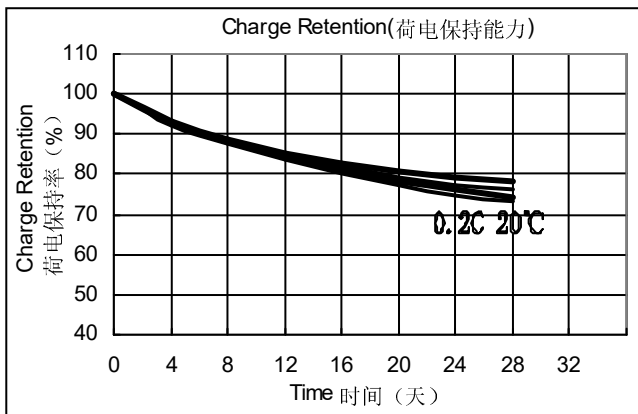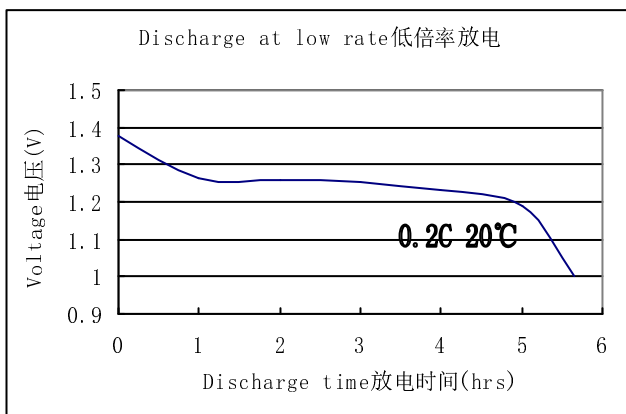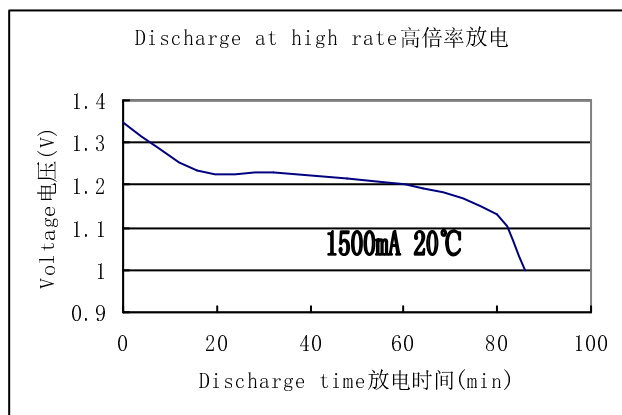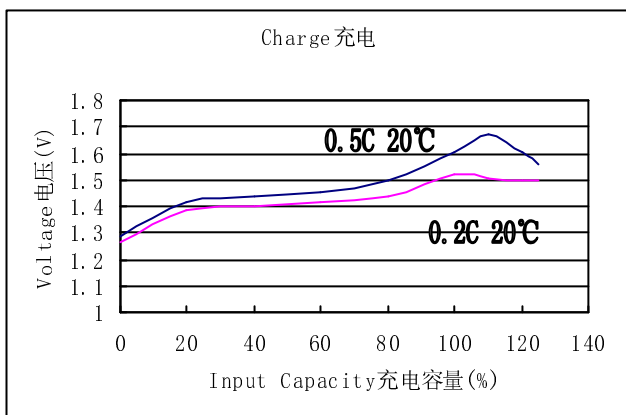

## 2. EXTERNAL APPEARANCE

The cell/battery shall be free from cracks, scars, breakage, rust, discoloration, leakage nor deformation.

## 3. CAUTION

- (1) Reverse charging is not acceptable.
- (2) Charge before use. The cells/batteries are delivered in an uncharged state.
- (3) Do not charge/discharge with more than our specified current.
- (4) Do not short circuit the cell/battery Permanent damage to the cell/battery may result.
- (5) Do not incinerate or mutilate the cell/battery.
- (6) Do not solder directly to the cell/battery.
- (7) the life expectancy may be reduced if the cell/battery is subjected adverse conditions like: extreme temperature, deep cycling, excessive overcharge/ over-discharge.
- (8) store the cell/battery uncharged in a cool dry place. Always discharge batteries before bulk storage or shipment.