

◆標準品一覧表 / STANDARD SIZE

□: 静電容量許容差記号 / Tolerance **: 端子加工記号 / Suffix


定格電圧 Rated Voltage	定格静電 容量 Cap(μF)	寸 法 Dimensions (mm)						標準梱包数 / Typical Packaging Quantity (pcs)								品 番 Part No.
		A	B	C	F±1.0	LS±0.5	d	ロングリード品 Long Lead type		テーピング(つづら)品 - 形状別 Taping Ammo Pack Type - Style						
								Bag	Carton	TC	TX, TH	TL, TJ	TN	TS		
125 VAC	0.01	10.0	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	125MMBA103□**	
	0.012	10.0	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	125MMBA123□**	
	0.015	10.0	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	125MMBA153□**	
	0.018	10.0	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	125MMBA183□**	
	0.022	10.0	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	125MMBA223□**	
	0.027	10.0	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	125MMBA273□**	
	0.033	10.0	5.5	9.5	7.5	5.0/7.5	0.6	200	6,000	1,000	—	—	—	1,000	125MMBA333□**	
	0.039	10.0	5.5	10.0	7.5	5.0/7.5	0.6	200	5,000	1,000	—	—	—	1,000	125MMBA393□**	
	0.047	10.0	6.0	10.5	7.5	5.0/7.5	0.6	200	5,000	1,000	—	—	—	1,000	125MMBA473□**	
	0.056	10.0	6.0	11.0	7.5	5.0/7.5	0.6	200	4,000	1,000	—	—	—	1,000	125MMBA563□**	
	0.068	10.0	6.0	12.5	7.5	5.0/7.5	0.6	200	4,000	1,000	—	—	—	1,000	125MMBA683□**	
	0.082	10.0	6.5	13.0	7.5	5.0/7.5	0.6	200	4,000	1,000	—	—	—	1,000	125MMBA823□**	
	0.1	10.0	6.0	9.0	7.5	5.0/7.5	0.5	200	6,000	1,000	—	—	—	1,000	125MMBA104□**	
	0.12	10.0	6.0	9.0	7.5	5.0/7.5	0.5	200	6,000	1,000	—	—	—	1,000	125MMBA124□**	
	0.15	10.0	6.5	10.0	7.5	5.0/7.5	0.5	200	5,000	1,000	—	—	—	1,000	125MMBA154□**	
	0.18	10.0	6.5	11.0	7.5	5.0/7.5	0.5	200	5,000	1,000	—	—	—	1,000	125MMBA184□**	
	0.22	10.0	6.5	11.5	7.5	5.0/7.5	0.5	200	4,000	1,000	—	—	—	1,000	125MMBA224□**	
	0.27	12.5	6.0	11.5	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	125MMBA274□**	
	0.33	12.5	6.5	12.0	10.0	5.0/7.5/10.0	0.6	200	3,000	—	1,000	500	—	500	125MMBA334□**	
	0.39	12.5	7.0	12.5	10.0	5.0/7.5/10.0	0.6	200	3,000	—	500	500	—	500	125MMBA394□**	
0.47	12.5	7.5	13.5	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	500	—	500	125MMBA474□**		
0.56	12.5	7.5	15.0	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	400	—	400	125MMBA564□**		
0.68	12.5	8.0	15.5	10.0	5.0/7.5/10.0	0.6	100	2,000	—	500	400	—	400	125MMBA684□**		
0.82	17.5	7.5	14.0	15.0	5.0/7.5/15.0	0.6	100	2,000	—	—	400	400	—	125MMBA824□**		
1	17.5	8.0	15.0	15.0	5.0/7.5/15.0	0.6	100	1,500	—	—	400	400	—	125MMBA105□**		
250 VAC	0.01	12.5	5.0	9.0	10.0	5.0/7.5/10.0	0.6	200	5,000	—	1,000	500	—	500	250MMBA103□**	
	0.012	12.5	5.5	9.5	10.0	5.0/7.5/10.0	0.6	200	5,000	—	1,000	500	—	500	250MMBA123□**	
	0.015	12.5	6.0	10.0	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	250MMBA153□**	
	0.018	12.5	6.0	10.0	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	250MMBA183□**	
	0.022	12.5	5.5	9.5	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	250MMBA223□**	
	0.027	12.5	5.5	11.0	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	250MMBA273□**	
	0.033	12.5	5.5	11.0	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	250MMBA333□**	
	0.039	12.5	6.0	11.5	10.0	5.0/7.5/10.0	0.6	200	4,000	—	1,000	500	—	500	250MMBA393□**	
	0.047	12.5	6.5	12.0	10.0	5.0/7.5/10.0	0.6	200	3,000	—	1,000	500	—	500	250MMBA473□**	
	0.056	18.0	5.5	11.0	15.0	5.0/7.5/15.0	0.6	200	3,000	—	—	500	400	—	250MMBA563□**	
	0.068	18.0	6.0	11.0	15.0	5.0/7.5/15.0	0.6	100	3,000	—	—	500	400	—	250MMBA683□**	
	0.082	18.0	6.0	11.5	15.0	5.0/7.5/15.0	0.6	100	3,000	—	—	500	400	—	250MMBA823□**	
	0.1	18.0	6.0	13.0	15.0	5.0/7.5/15.0	0.6	100	2,000	—	—	500	400	—	250MMBA104□**	
	0.12	18.0	7.0	13.5	15.0	5.0/7.5/15.0	0.8	100	2,000	—	—	500	400	—	250MMBA124□**	
	0.15	18.0	7.5	14.5	15.0	5.0/7.5/15.0	0.8	100	1,500	—	—	400	400	—	250MMBA154□**	
	0.18	18.0	8.0	15.0	15.0	5.0/7.5/15.0	0.8	100	1,500	—	—	400	400	—	250MMBA184□**	
	0.22	18.0	9.0	15.5	15.0	5.0/7.5/15.0	0.8	100	1,500	—	—	400	300	—	250MMBA224□**	
	0.27	25.5	7.0	16.0	22.5	22.5	0.8	50	1,500	—	—	—	—	—	250MMBA274□**	
	0.33	25.5	8.0	16.5	22.5	22.5	0.8	200	1,000	—	—	—	—	—	250MMBA334□**	
	0.39	25.5	8.5	17.0	22.5	22.5	0.8	200	1,000	—	—	—	—	—	250MMBA394□**	
0.47	25.5	9.0	18.0	22.5	22.5	0.8	200	800	—	—	—	—	—	250MMBA474□**		
0.56	25.5	9.0	20.0	22.5	22.5	0.8	200	800	—	—	—	—	—	250MMBA564□**		
0.68	25.5	10.5	21.0	22.5	22.5	0.8	100	500	—	—	—	—	—	250MMBA684□**		
0.82	31.0	10.0	20.5	27.5	—	0.8	100	500	—	—	—	—	—	250MMBA824□**		
1	31.0	11.0	22.0	27.5	—	0.8	100	500	—	—	—	—	—	250MMBA105□**		

注) 1. 接続条件 (Fig.1, Fig.2)

2. 雑音防止用として使用の場合、パルス電圧はTable 1の値以下として下さい。

Note) 1. Operating circuit (Fig.1, Fig.2)

2. When operating capacitor for noise suppression, voltage of pulse applied to the capacitor shall be within value specified in Table 1.

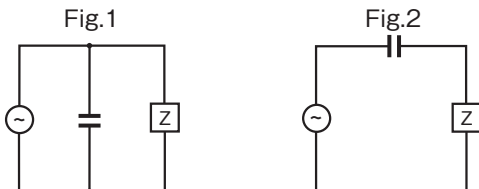

定格電圧 Rated Voltage	パルス電圧 Pulse Voltage
125VAC	250Vo-p
250VAC	630Vo-p