
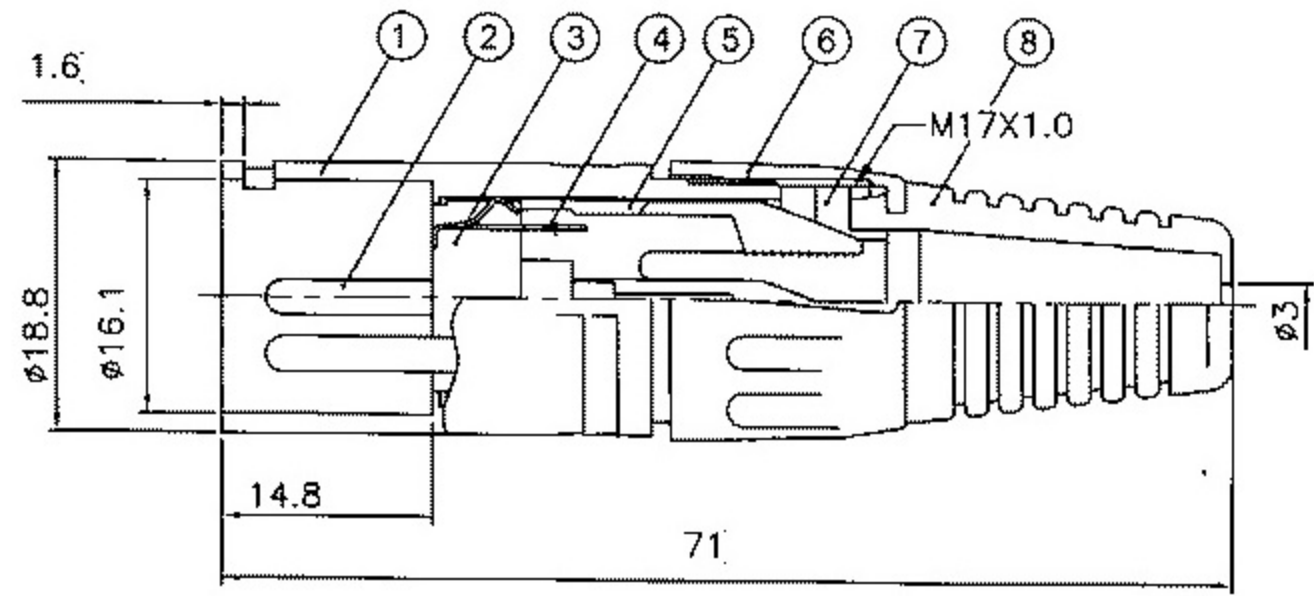
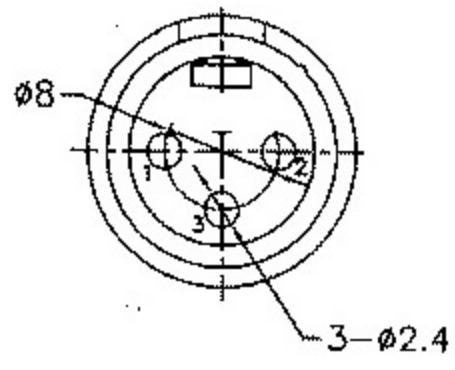


0.5-5M M=± 0.2
 5-30M M=± 0.4
 30-120M M=± 0.6
 120-315M M=± 1.0
 315-10000M M=± 1.6

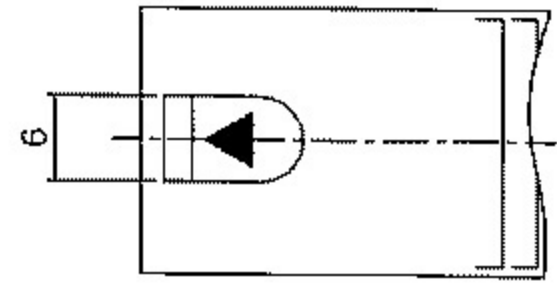

| | |
|----------------------------|-------------|
| Electrical(電氣性能): | |
| Contact resistance(接觸電阻) | 3mΩ max. |
| Insulator resistance(絕緣電阻) | 5000MΩ min. |
| Current rating(耐電流) | 3P/15A |
| Withstand voltage(耐電壓) | 1500 VAC |

| | | | | |
|-----|----------------|----------|--------|------|
| 8 | BOOT | PVC | BLACK | 1 |
| 7 | T-RING | POM | WHITE | 1 |
| 6 | CAP | PA | BLACK | 1 |
| 5 | CHUCK | POM | WHITE | 1 |
| 4 | TERMINAL | H62 | TIN | 1 |
| 3 | INSULATOR | PA | BLACK | 1 |
| 2 | PIN | H59-1 | GOLD | 1 |
| 1 | DIE-CAST SHELL | ZZnAL4-0 | List 1 | 1 |
| NO. | DESCRIPTION | MATERIAL | FINISH | Q'TY |

| | | | | |
|---|---|--|--|--|
| 品名 ARTICLE 規格 SPECIFICATION 單位 UNIT 比例 SCALE | 3P MALE MIC CONNECTOR mm 2:1 |  AVVICON ELECTRONIC CORPORATION 一 障 實 業 有 限 公 司 TEL:886-6-2677751 FAX:886-6-2696498 e-mail: yiwai751@ms9.hinet.net http://www.avvicon.com http://www.a-adcon.com | 圖號 DRAWING NO. 日期 DATE 繪圖 DRAWN BY | MPC-601A-3P 2016/09/09 VICKY |
|---|---|--|--|--|