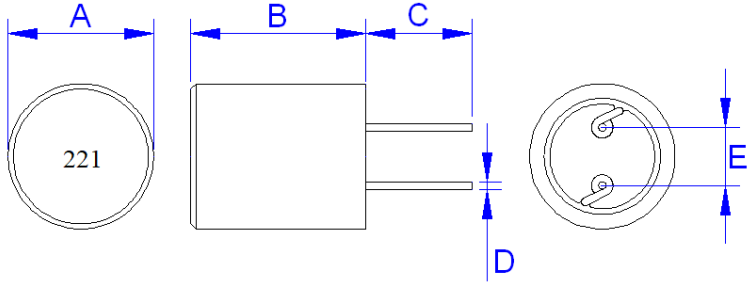



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: SRC1317-221M+M		DWG.NO: FX20122210
CUSTOMER PART NO:		CUST.DWG.NO:
(1) DIMENSION(UNIT: mm) 		A 13.0 (MAX) m/m
		B 15.0 (MAX) m/m
		C 5.0 ± 1.0 m/m
		D 0.8 (REF) m/m
		E 5.0 (REF) m/m
		F m/m
		G m/m
		H m/m
		(2)ELECTRICAL REQUIREMENTS
L (uH)	220 ± 20%	
RDC (Ω)	0.2 (MAX)	
IDC (A)	0.7 (MAX)	
TEST CONDITION	1KHz / 0.25V	
(4)MATERIAL LIST		
NO/ITEM	MATERIAL	SUPPLIER
CORE	DR2W9X10S B=6.0 P12.4X14 JX OR EQU	HORNG YIH OR EQU
WIRE TYPE	2UEW φ 0.27mm OR EQU	ELEKTRISOLA OR EQU
WINDING	45.5 TS (REF)	
TUBE	φ 9× 12mm OR EQU	DONG GUAN SALIPT OR EQU
		APPROVED BY 吳載敏
		CHECKED BY 張明德
		DRAWN BY Vicky

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: SRC1317-221M+M				DWG.NO: FX20122210				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C	D	E
SPEC	220 ± 20%	0.2 (MAX)	0.7 (MAX)	13.0 (MAX)	15.0 (MAX)	5.0 ± 1.0	0.8 (REF)	5.0 (REF)
1	226	0.14	OK	12.59	14.38	4.95	0.79	5.05
2	224	0.14	OK	12.77	13.88	4.95	0.81	5.07
3	216	0.14	OK	12.42	13.86	5.12	0.79	4.99
4	221	0.14	OK	12.41	14.01	5.01	0.80	5.02
5	222	0.13	OK	12.40	14.03	5.02	0.80	5.01
6	224	0.14	OK	12.16	14.28	5.11	0.79	5.07
7	220	0.14	OK	12.55	13.65	5.11	0.81	5.06
8	222	0.14	OK	12.36	14.37	4.89	0.80	5.04
9	220	0.14	OK	12.27	14.28	5.14	0.80	4.95
10	224	0.14	OK	12.73	14.16	5.01	0.79	4.92
X	222	0.14		12.47	14.09	5.03	0.80	5.02
R	10	0.01		0.61	0.73	0.25	0.02	0.15
TEST INSTRUMENTS VR113 VR712						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw