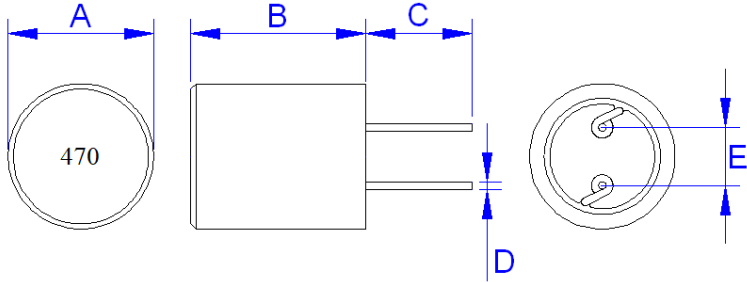



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: SRC1317-470M+M		DWG.NO: FX20122208
CUSTOMER PART NO:		CUST.DWG.NO:
<p>(1) DIMENSION(UNIT: mm)</p> 		A 13.0 (MAX) m/m
		B 15.0 (MAX) m/m
		C 5.0 ± 1.0 m/m
		D 0.8 (REF) m/m
		E 5.0 (REF) m/m
		F m/m
		G m/m
		H m/m
		(2)ELECTRICAL REQUIREMENTS
L (uH)	47 ± 20%	
RDC (mΩ)	60 (MAX)	
IDC (A)	1.5 (MAX)	
TEST CONDITION	1KHz / 0.25V	
(4)MATERIAL LIST		
NO/ITEM	MATERIAL	SUPPLIER
CORE	DR2W9X10 6-6-5 P12.4X10.5x14 JX OR EQU	HORNG YIH OR EQU
WIRE TYPE	2UEW φ 0.5mm OR EQU	ELEKTRISOLA OR EQU
WINDING	21.5 TS (REF)	
TUBE	φ 9× 12mm OR EQU	DONG GUAN SALIPT OR EQU
		APPROVED BY 吳載敏
		CHECKED BY 張明德
		DRAWN BY Vicky

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: SRC1317-470M+M				DWG.NO: FX20122208				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (mΩ)	IDC (A)	A	B	C	D	E
SPEC	47 ± 20%	60 (MAX)	1.5 (MAX)	13.0 (MAX)	15.0 (MAX)	5.0 ± 1.0	0.8 (REF)	5.0 (REF)
1	47.92	35.55	OK	12.21	13.91	5.10	0.80	5.09
2	45.73	36.26	OK	12.21	14.03	4.97	0.80	4.94
3	47.78	36.19	OK	12.59	13.96	5.01	0.80	5.05
4	46.78	35.60	OK	12.40	14.01	5.01	0.80	5.02
5	46.78	35.80	OK	12.46	13.98	5.03	0.80	5.01
6	47.87	35.50	OK	12.10	14.30	5.14	0.80	5.00
7	46.88	35.51	OK	12.60	13.79	5.05	0.79	5.05
8	46.82	36.47	OK	12.14	14.39	4.93	0.79	5.09
9	45.74	35.59	OK	12.12	14.35	5.12	0.79	4.98
10	47.10	34.67	OK	12.75	13.88	5.08	0.81	4.98
X	46.94	35.71		12.36	14.06	5.04	0.80	5.02
R	2.19	1.80		0.65	0.60	0.21	0.02	0.15
TEST INSTRUMENTS VR113 VR712						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw