



FEATURES


2 units serially connected to provide 5.4V products

Lead terminal type


2-Pin terminal type according to customer's requirement

Drawing


I TYPE

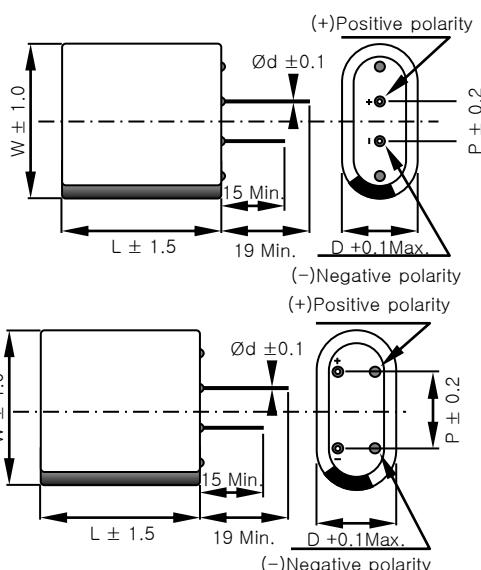

O TYPE

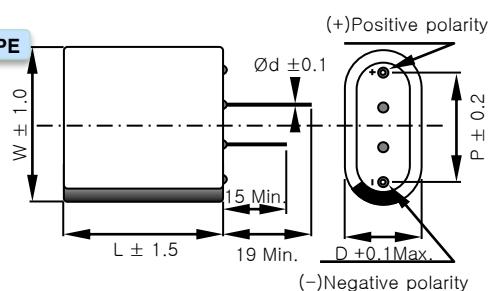

H TYPE

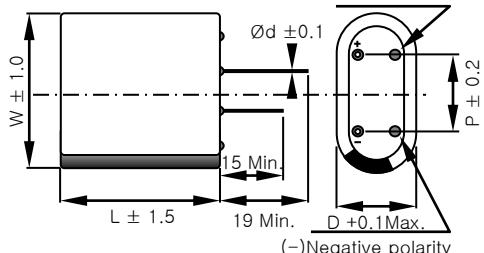

$D = 8.5\text{mm}$

TYPE	I	O	H
P	4.7	12.3	8.5

SPECIFICATION

ITEM		CHARACTERISTICS			
Rated Voltage (V_R)		5.4 V			
Operating Temperature		-40 ~ +65 °C			
Capacitance Tolerance		-10 ~ +30%			
High Temp. Load Life	Measure	After 1,000 hours at V_R loaded under +65 °C, capacitors meet the following criteria.			
	Cap. Change	$\leq 30\%$ of initial value			
	ESR Change	100% increase from specified value			
Cycle Life Characteristics	Cycle	100,000			
	Cap. Change	$\leq 30\%$ of initial value			
	ESR Change	100% increase from specified value			
	Condition	Cycle of Charge/discharge from V_R to $1/2V_R$			
Shelf Life		2 years No Electrical Charge, Temperature Below 70 °C ($\Delta C : \leq 10\%$ of initial value / $\Delta ESR : \leq 50\%$ of initial value)			

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)	Size (mm)		Weight (g)	Volume (mℓ)
			AC(1kHz)	DC			D × W × L			
VEC5R4155QG	5.4	1.5	115	195	3.0	0.007	8.5×17×22		3.3	3.2

* Max. Current : 1 sec. discharge to $1/2V_R$

* When do module more than 2 series, please fully discharge over 1 hour first, then assemble right after within 1 hour.