
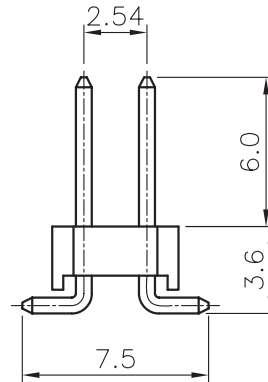
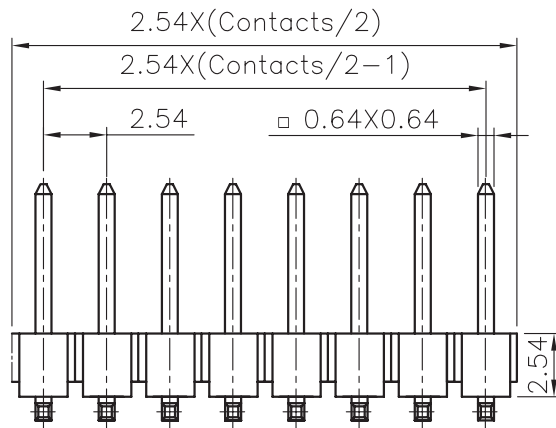
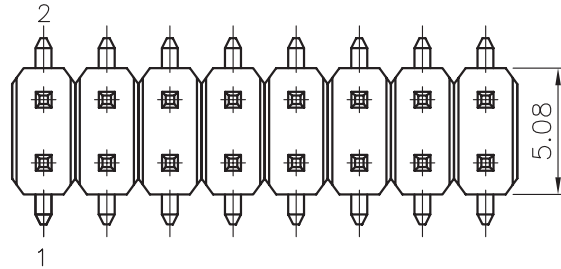



參考資料





Specifications:
 Current rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1000M ohm Min
 Withstanding Voltage:600V AC For one Minute
 Operating Temperature Range:-40°C To +105°C
 Materials And Finish:
 Insulator:High Temp.Plastic(Nylon 6T UL94V-0)
 Insulator Color:Ivory
 Contact:Copper Alloy
 Finish:Gold Plated
 How To Order
 2213SM-XXG

G:Gold Plated
 No. Of Positions
 SMD Type

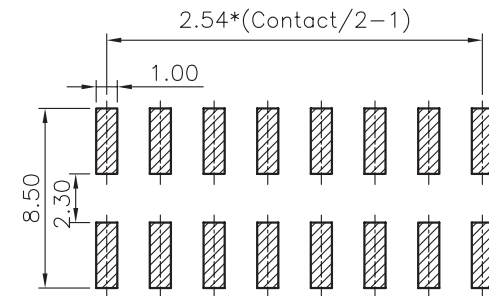

PCB Layout

F				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 2.54mm Pin Header Double Row SMD Type	SIZE A4
E			CHECKED:					
D				APPROVAL:	UNIT: MM	PART NO: 2213SM-XXG		
C					SCALE: 1:1			
B	04-Aug-2006	Modify Finish		BY	SHEET: 1 / 1			
A	10-JAN-2006	(PC0001)			PROJECTION: 			
REV	DATE	FILE						