

Material :

Nylon 66 UL94-V0




Specification (mated with 254AT) :

Voltage Rating : 250V AC/DC
 Current Rating : 3A
 Withstanding Voltage : 600V AC/minute
 Contact Resistance : 15 mΩ max.
 Insulation resistance : 1,000 MΩ min.
 Temperature Range : -25°C ~ + 105°C

Order Information

254A H - D XX - X — * Special color code
 Series — * Curcuit No. 04 ~ 80
 — * D - Dual Row
 — * H - Housing

Note: Standard color is black, for special color put color code at end of P/N

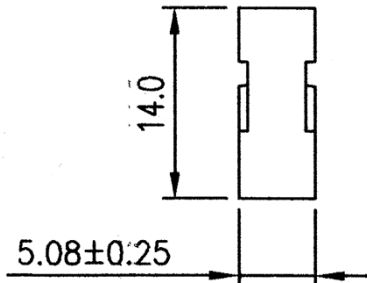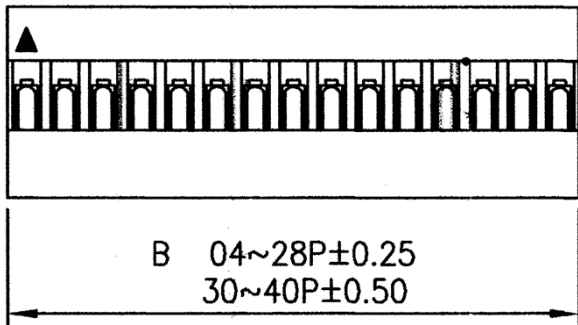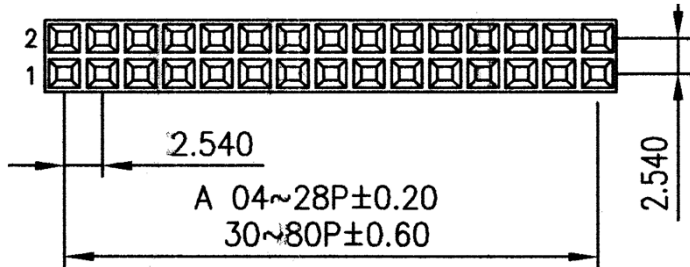

Circuit	Dim A	Dim B	Circuit	Dim A	Dim B
04	2.54	5.06	44	53.34	55.88
06	5.06	7.62	46	55.88	58.42
08	7.62	10.16	48	58.42	60.96
10	10.16	12.70	50	60.96	63.50
12	12.70	15.24	52	63.50	66.04
14	15.24	17.78	54	66.04	68.58
16	17.78	20.32	56	68.58	71.12
18	20.32	22.86	58	71.12	73.66
20	22.86	25.40	60	73.66	76.20
22	25.40	27.94	62	76.20	78.74
24	27.94	30.46	64	78.74	81.28
26	30.46	33.02	66	81.28	83.82
28	33.02	35.56	68	83.82	86.36
30	35.56	38.10	70	86.36	88.90
32	38.10	40.64	72	88.90	91.44
34	40.64	43.18	74	91.44	93.98
36	43.18	45.72	76	93.98	96.52
38	45.72	48.26	78	96.52	99.06
40	48.26	50.80	80	99.06	101.60
42	50.80	53.34			

E				Drawn Jack	General Tolerance			Part No. 254AH-DXX File No.: YY-254AH-DXX
D					.0	.00	.000	
C				Checked Ivy	±0.25	±0.20	±0.05	
B	15-Mar-17	change Logo	David	Appraisal David	Unit : mm			
A	28-May-10	new release	Jack		Scale :	Title: 2.54mm Housing, A type Dual Row		
Rev.	Date	File	BY		Sheet : 1 / 1			Height 14.0mm, Width 5.08mm, to be mated with 254AT