


1

2

3

4

5

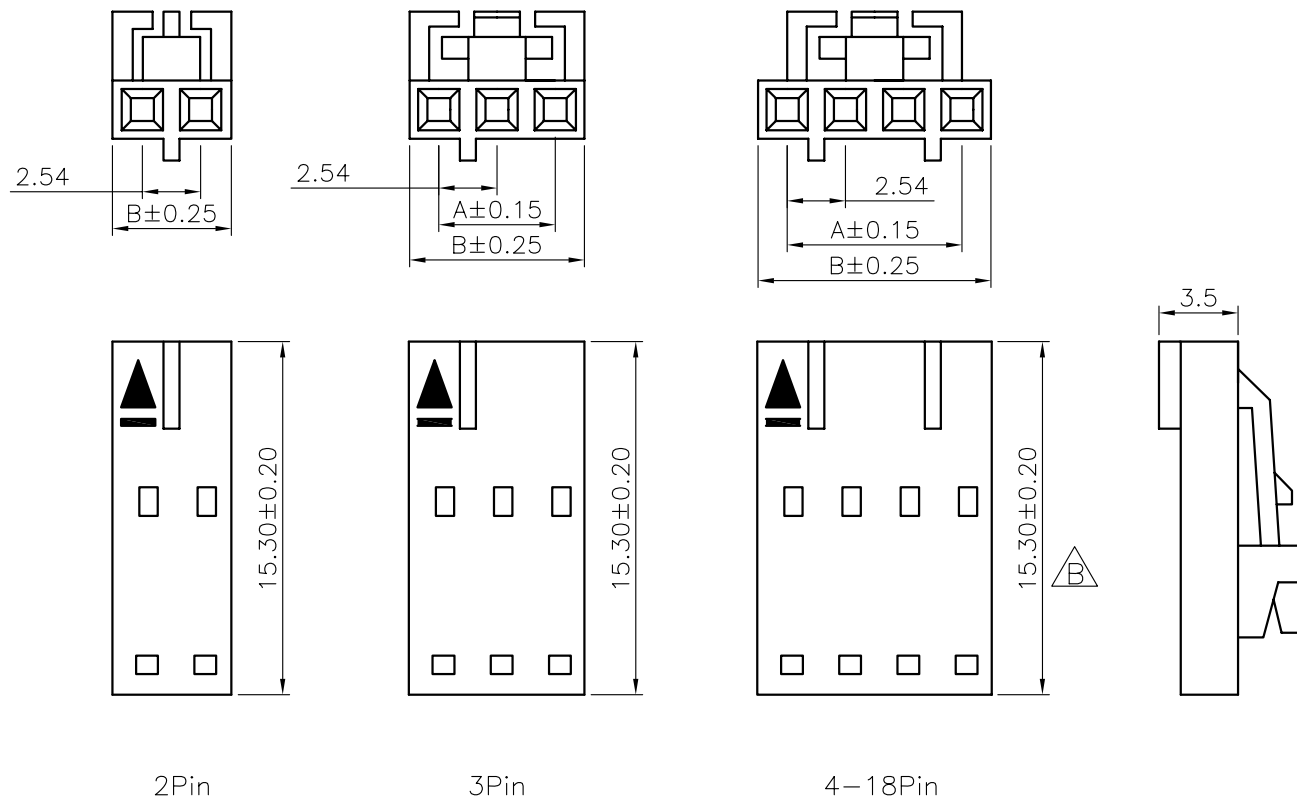

Specifications:



Current rating: 2.5Amps $\triangle B$
 Voltage rating: 250V AC, DC
 Dielectric Withstanding: 800V AC; DC $\triangle B$
 Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ $\triangle B$
 Contact resistance: 15mohm Max
 Insulation resistance: 1,000Mohm min.
 Materials and Finish
 Insulator: PBT(UL94V-0)
 Insulator Color: Black
 Mating Part: 3750T
 How To Order
 3750G-XX

No. Of Positions (2-18 Ways)
 G: Lock Version Housing



Positions	Dim. A	Dim. B	Positions	Dim. A	Dim. B
2	2.54	5.20	14	33.02	35.80
3	5.08	7.80	15	33.54	38.30
4	7.62	10.30	16	38.10	40.90
5	10.16	12.90	17	40.64	43.40
6	12.70	15.40	18	43.18	46.00
7	15.24	18.00			
8	17.78	20.50			
9	20.32	23.10			
10	22.86	25.60			
11	25.40	28.10			
12	27.94	30.70			
13	30.48	33.20			

RoHS Compliant

F				DRAWN: Allen	GENERAL TOLERANCE: .X = ± 0.20 .XX = ± 0.15	 Neltron Industrial Co., Ltd.	DESCRIPTION: 2.54mm Pitch Lock Version Housing	SIZE A4
E								
D				CHECKED:	UNIT: MM	PART NO: 3750G-XX		
C					SCALE: 1:1			
B	04-OCT-2013	ECN-TW1310003	Cherry	APPROVAL:	SHEET: 1 / 1			
A	01-JUN-2009		Allen	Mike Wu	PROJECTION: 			
REV	DATE	FILE	BY					