

1




2

3


4

5


参考資料

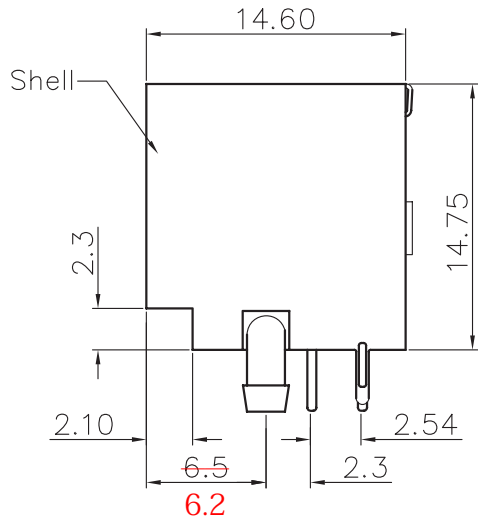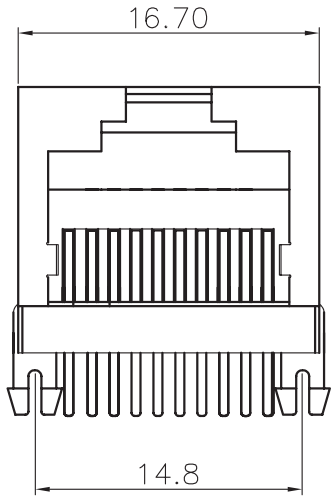

Specifications:
 Current Rating:1.5A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:500M ohm. Min.
 Withstanding Voltage:1,000V AC For One Minute
 Operating Temperature Range: -40°C to +85°C
 Material and Finish:
 Insulator:PBT (UL94V-0)
 Insulator Color:Black,White
 Contact:Phosphor Bronze $\triangle B$
 Plated:Gold Plated
 Shield:Copper Alloy With Nickel Plated
 How To Order
 7810-XPXC
 8,10 Contacts
 8,10 Contacts





C-00159 7810-8P8C (unit : mm)

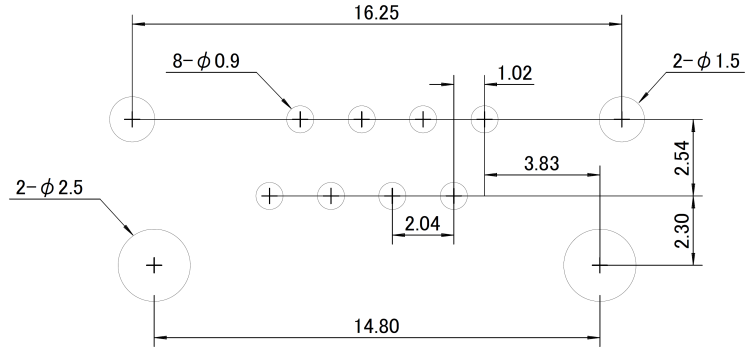

P.C.B. Layout

※間違いがあったため、当社で修正いたしました。2022.4.1

				DRAWN:	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
E				CHECKED:	UNIT: MM		DESCRIPTION:
D					SCALE:	Modular jack side entry shielded	A4
C					SHEET: 1 / 1	PART NO:	
B	22-May-2008	ECN-CN080527		APPROVAL:	PROJECTION: 	7810-XPXC	
A	07-30-2002	(P0041)					
REV	DATE	FILE	BY				

A

B

C

D