


SECTION A-A

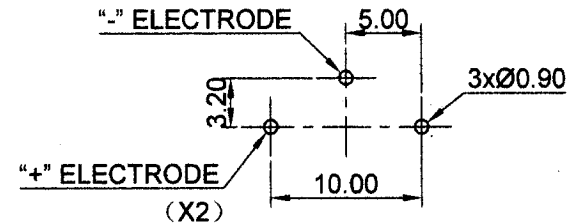

PCB MOUNTING LAYOUT

NOTES:

1. MATERIAL:
HOUSING : NYLON 66+15%GF UL94V0 BLACK COLOR
CONTACT : PHOSPHOR BRONZE 0.30MM THK
TIN PLATED OVER NICKEL
2. CURRENT RATING : 2A (AC/DC)
3. VOLTAGE RATING : 500V (AC/DC)
4. CONTACT RESISTANCE : 30 MILLIOHMS
5. INSULATION RESISTANCE : 1000 MEGAOHMS
6. TEMPERATURE RANGE : -55°C TO +105°C
7. HUMIDITY : 40°C AND 90-95% RH FOR 96 HOURS
8. RoHS COMPLIANT



3			COMFORTABLE ELECTRONIC CO.LTD.			
2			NAME	BATTERY HOLDER: CH261-2032LF		
1			SCALE	2:1	APPD	<i>鄭德佑</i>
NO.	MODIFICATION	DATE	UNIT	MM	CHKD	<i>黃榮光</i>
			MAT'L	AS NOTES	DWN	CHENGZHENHUA
			DATE	NOV. 15. 2010	DR NO	CH261-1110
			General Tolerance			
			Dim: 0.0 ±0.30 0.00 ±0.20 Angle: ±3° 0.000 ±0.10			