



插图 Illustration



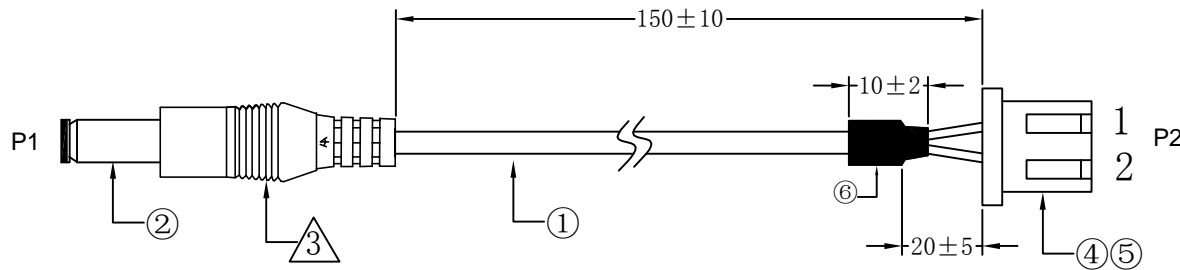


接线图:
Wiring Diagram

P1		P2
1	红色 Red	2
2	黑色 Black	1

Remark:
Maximum Rate: 3A 48V

Remark: comply with RoHS

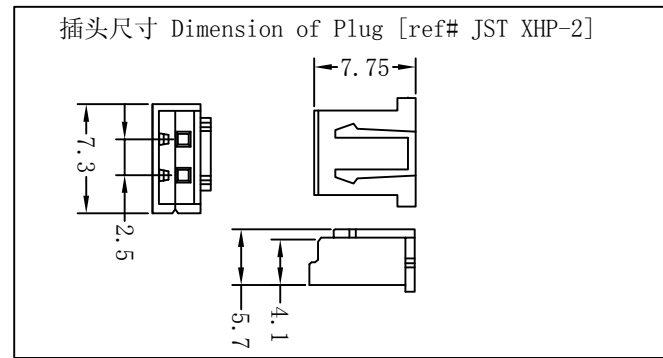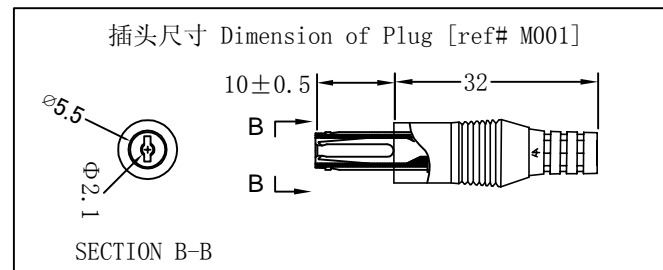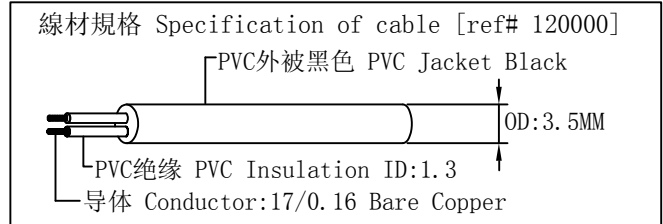

客户确认
Customer approved
Sign & Chop

UNIT单位:MM



协威亚洲有限公司
HERWELL ASIA LTD

⑥	V17002R	TUBE-BK	1PCS	黑色热缩管 Black tube L=10MM Φ:4.0MM
⑤	V19010R	JST SXH-001T-P0.6	2PCS	
④	V19010R	JST XHP-2	1PCS	PH:2.5mm White
③	V10008H	M001	5.1g	黑色 Black PVC 45P
②	V18010R	5521TV-20.5L	1PCS	DC5.5*2.1音叉 公头 (黑胶) DC5.5*2.1MM folk type Male (Black)
①	V08008H	120000	160	NO-UL PVC 22AWG/2C [(17/0.16BC×1.3MM)*2C< Red , Black>]×1C OD:3.5±0.1MM 外被Jacket:黑色PVC Black PVC
NO 序号	V-code V-编码	Part NO 款号	Qty 用量	Description 描述

图纸编号 Drawing No	DG01032-0050-03		
款 号 P/N			
型 号 Model No			
品 名 Description			
版次 Version	03	视角 ANGLE	
绘图/日期 Drawn By/Date	ML20/8/5		
审核/日期 Check By/Date			
审核/日期 Eng CheckBy/Date	LIN20/8/5		