
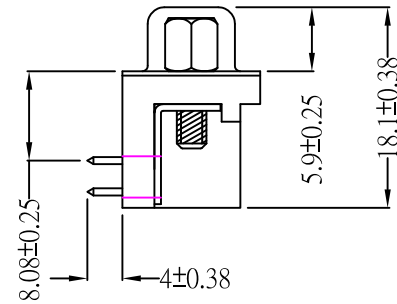
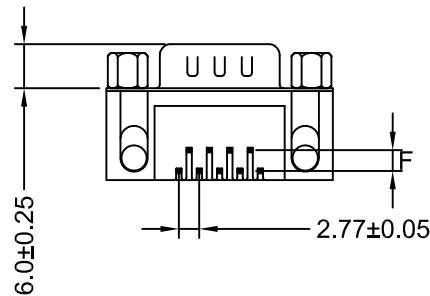
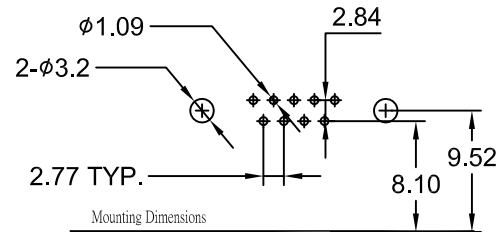


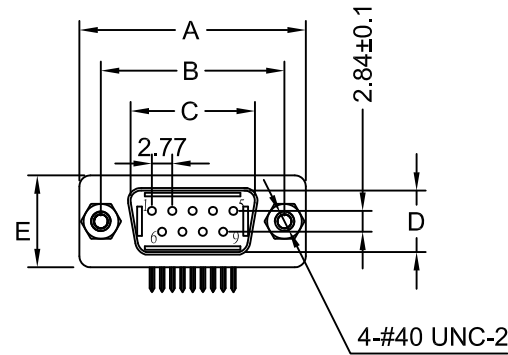

Note:

1. Material:

- 1.1 Insulator: PBT+30% Glass Fiber UL94V-0
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold, Tin Plated or Gold Plated
- 1.4 Shell: Steel, Nickel Plated or Tin Plated
- 1.5 Screw: Brass Nickel Plated (Optional Accessory)

2. Specification:

- 2.1 Current Rating: 5 Amps
- 2.2 Insulation Resistance: 5000 MΩ Min at 500V DC
- 2.3 Dielectric Strength: 1000V Per Minute
- 2.4 Temperature range: -55°C ~ 105°C

PART NO	A±0.38	B±0.25	C±0.15	D±0.15	E±0.38	F±0.10
PND05-09P	30.81	24.99	16.92	8.38	12.55	2.84
PND05-15P	39.25	33.32	25.25	8.38	12.55	2.84
PND05-25P	53.04	47.04	38.96	8.38	12.55	2.84
PND05-37P	69.32	63.50	55.42	8.38	12.55	2.84

PART NO:		MATERIAL:		 長榮有限公司 TEL: 02-26945824 FAX: 02-26946971	
MODEL NO:		FINSH:			
UNIT: mm	SIZE:	COLOR:		PART NAME: D-SUB 9公 90度L片 半金鎖螺絲	
TOLERANCE UNSPECIFIED		DR:			
.x	±0.3	CHK:		DWG NO: DMR-09PGG	
.xx	±0.20	APP:		REV: A03	
.xxx	±0.100			SCALE: 1:1	
ANG.	±1°			SHEET: 1 of 1	
					