


## SYNTEX TECH CORP.

### Specifications for MKA-10110

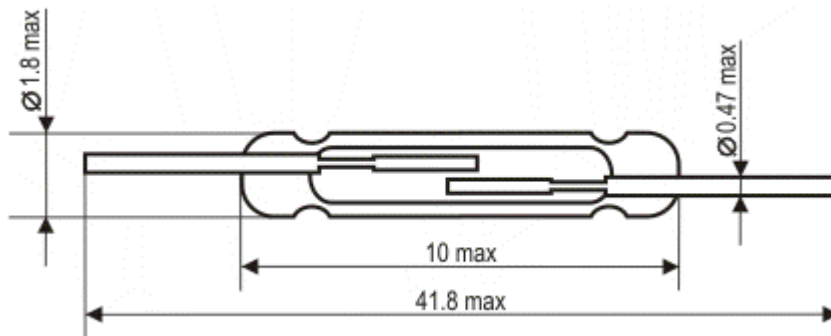

Contact form	1A
Contact material	Ru
Maximum switching power , W	15
Maximum switching voltage , V	150
Maximum switching current, A	0,5
Pull in , AT	10-30
Drop out, AT min	4
Contact resistance, Ohm max	0,1
Breakdown voltage, V dc min	200
Insulation resistance, Ohm min.	10 <sup>9</sup>
Operate time, ms max.	0,5
Release time, ms max.	0,3
Capacitance, pF max	0,5
Resonant frequency, Hz min	5000
Operate temperature range, °C	-60...+125
High humidity at T=35°C, % max.	98
Test coil:	Number of turns 5000
	Resistance, Ohm 580
UL file#	E229065