



## ■ Features

- Super Flux Output
  - 5 φ Standard Directivity
  - Superior Weather-resistance
  - UV Resistant Epoxy
  - Water Clear Type

## ■ Applications

- Toys
  - Games
  - Audio
  - Backing Lighting

#### **Absolute Maximum Rating**


(Ta=25°C)

Item	Symbol	Value		Unit
		Red	Green/Blue	
DC Forward Current	I <sub>F</sub>	50	30	mA
Pulse Forward Current*	I <sub>FP</sub>	120	100	mA
Reverse Voltage	V <sub>R</sub>	5	5	V
Power Dissipation	P <sub>D</sub>	130	108	mW
Operating Temperature	Topr	-30 ~ +85		°C
Storage Temperature	Tstg	-40 ~ +100		°C
Lead Soldering Temperature	Tsol	260°C/5sec		-


\*Pulse width Max.10ms Duty ratio max 1/10

### ■Electrical -Optical Characteristics

(Ta=25°C)

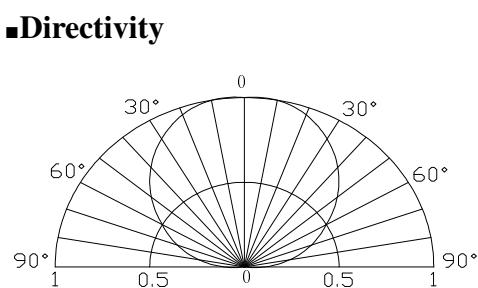

### ■Outline Dimension

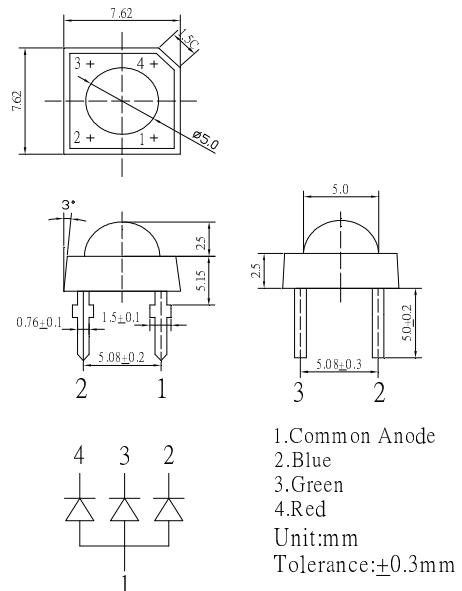

Item	Symbol	Condition
	U (T)	L-28-A

DC Forward Voltage	V <sub>F</sub> (R)	I <sub>F</sub> =20mA	1.8	2.1	2.6	V
	V <sub>F</sub> (B/G)	I <sub>F</sub> =20mA	2.9	3.1	3.6	V
DC Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	µA
Domi. Wavelength*	λ <sub>D</sub> (Red)	I <sub>F</sub> =20mA	620	625	630	nm
	λ <sub>D</sub> (Green)	I <sub>F</sub> =20mA	520	525	530	nm
	λ <sub>D</sub> (Blue)	I <sub>F</sub> =20mA	465	470	475	nm
Luminous Intensity*	I <sub>V</sub> (Red)	I <sub>F</sub> =20mA	1560	2300	-	mcd
	I <sub>V</sub> (Green)	I <sub>F</sub> =20mA	3000	4000	-	mcd
	I <sub>V</sub> (Blue)	I <sub>F</sub> =20mA	750	1200	-	mcd
50% Power Angle	2θ <sub>1/2</sub>	I <sub>F</sub> =20mA	-	120	-	deg

\*1 Tolerance of measurements of dominant wavelength is +1nm

\*2 Tolerance of measurements of luminous intensity is +15%

\*<sup>3</sup> Tolerance of measurements of forward voltage is  $\pm 0.1\text{V}$

## **LED & Application Technologies**



## **REACH**

