


**SMA JACK – N PLUG ADAPTER + SMA JACK – N JACK ADAPTER
S-022 + S-024**


Introduction:

This value of testing report include these two adapter (S-022+S-024)




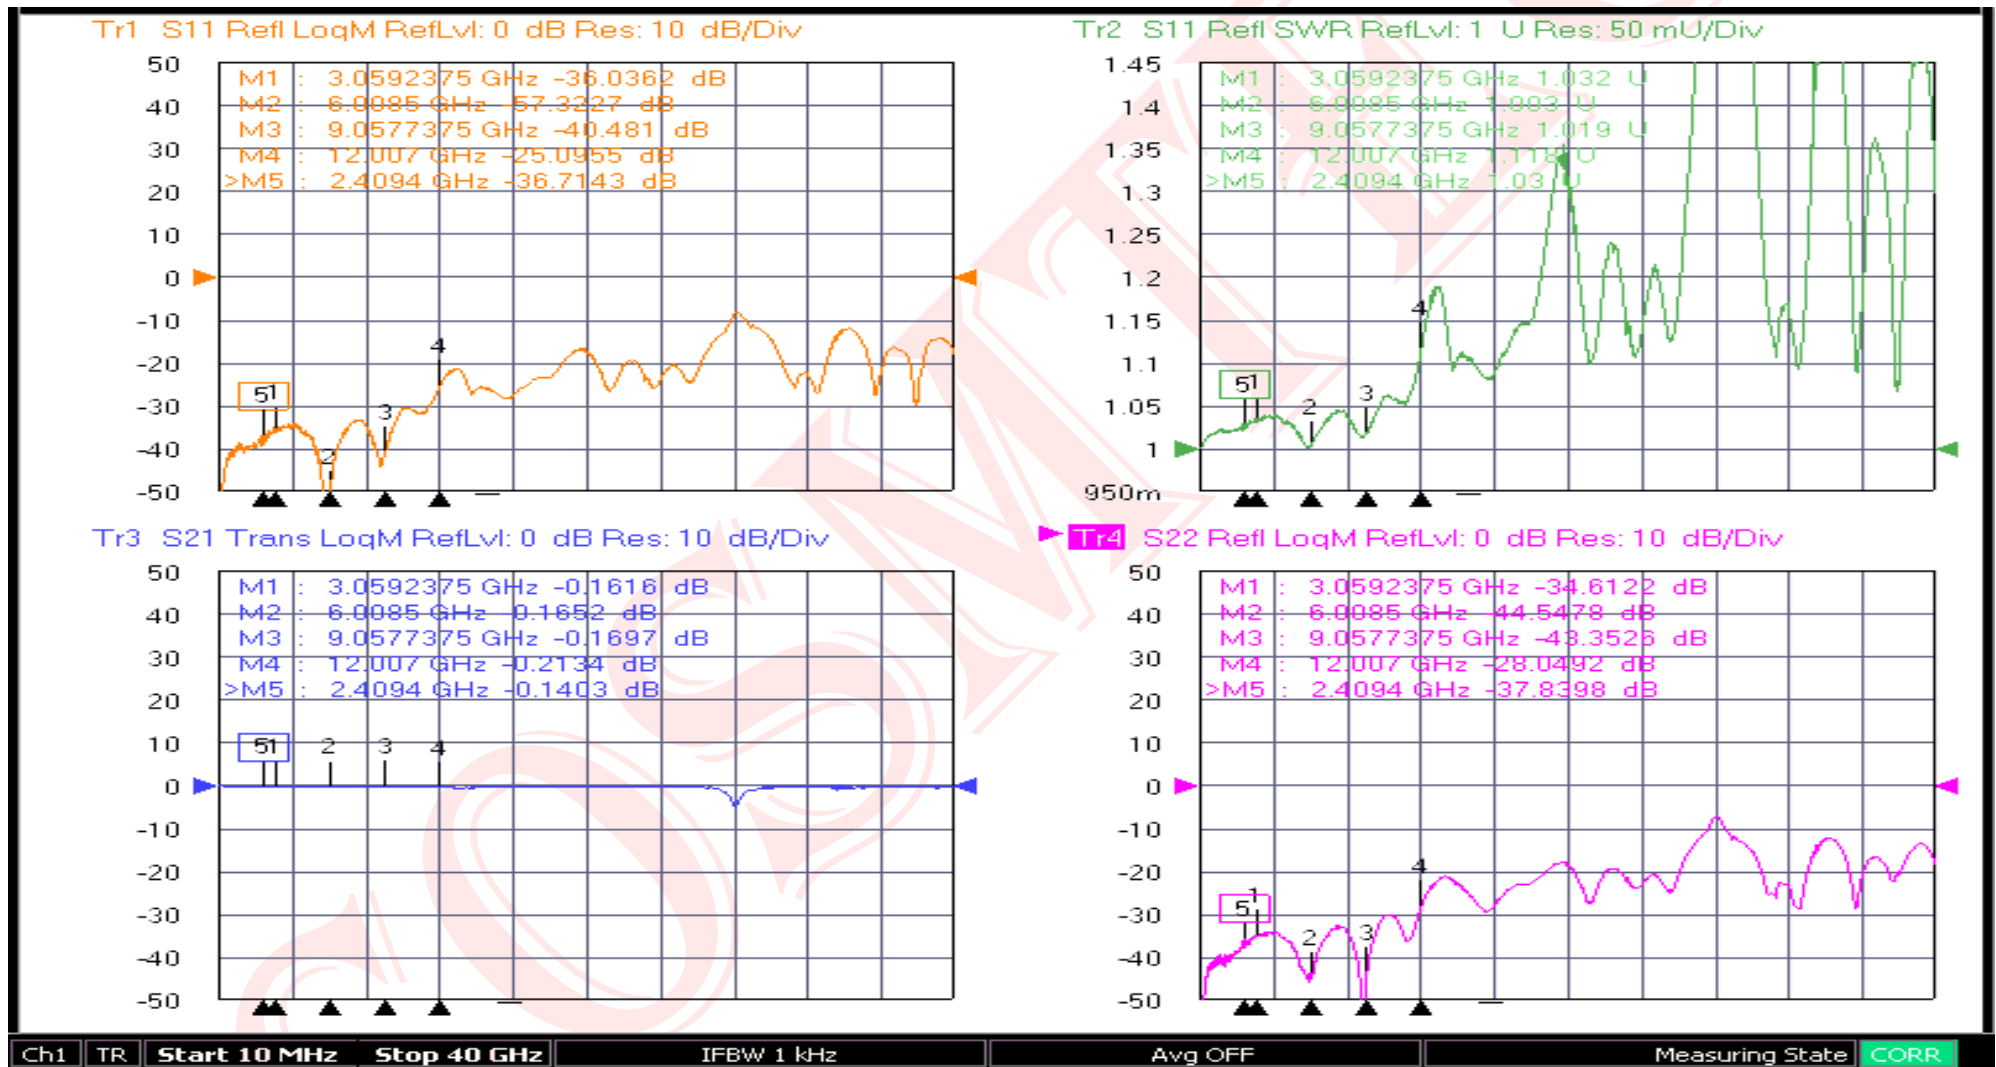


Tr1 S11 Refl Pwr Out RefLvl: 0 dBm Res: 10 dB/Div

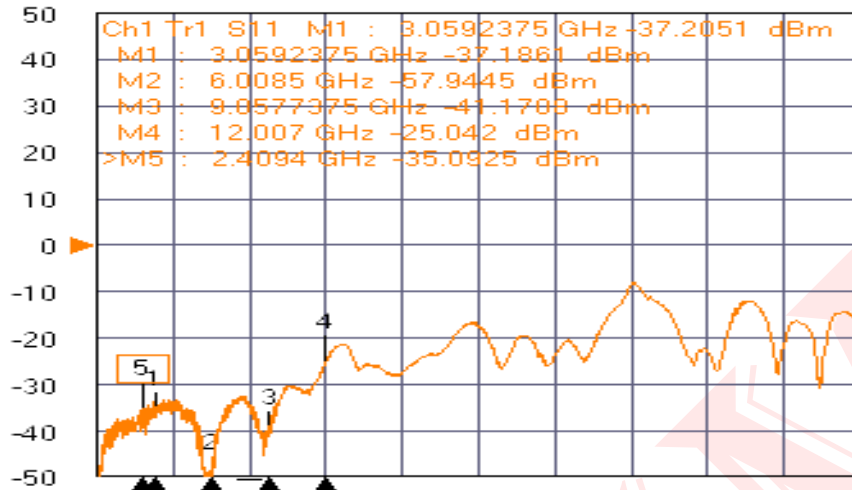


Tr2 S11 Refl SWR RefLvl: 1 U Res: 50 mU/Div

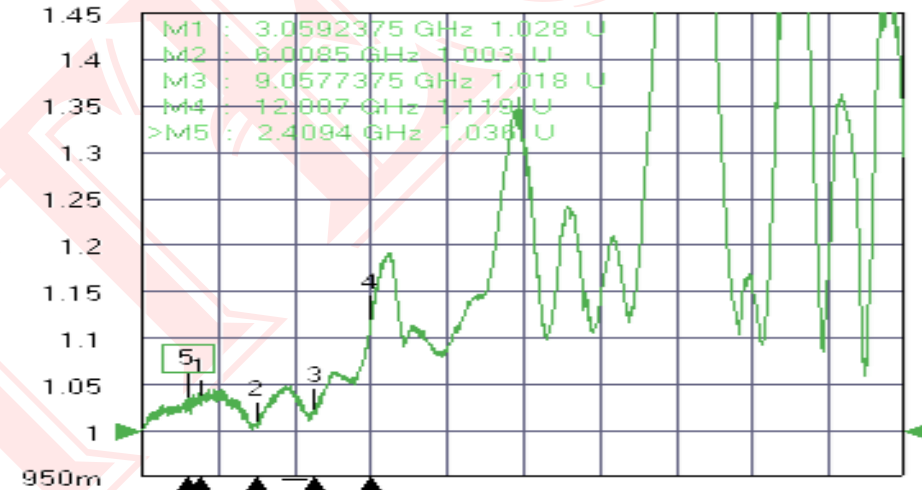

Tr3 S21 Trans Pwr Out RefLvl: 0 dBm Res: 10 dB/Div

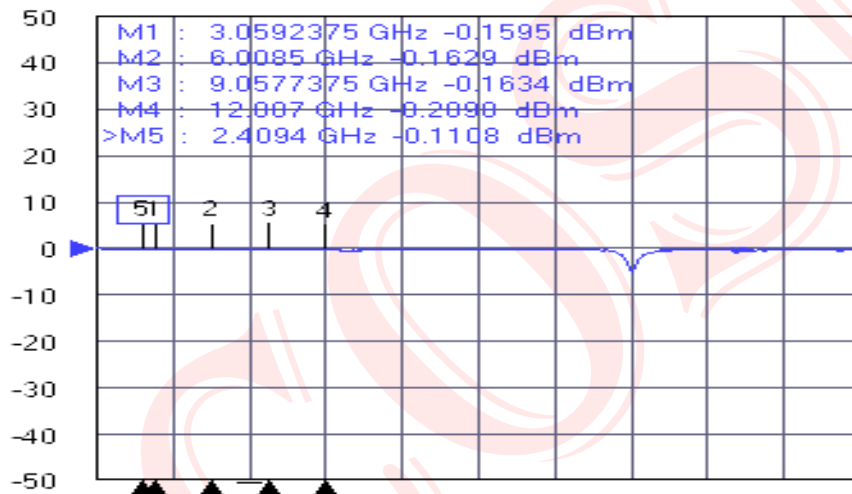

Tr4 S22 Refl LogM RefLvl: 0 dB Res: 10 dB/Div

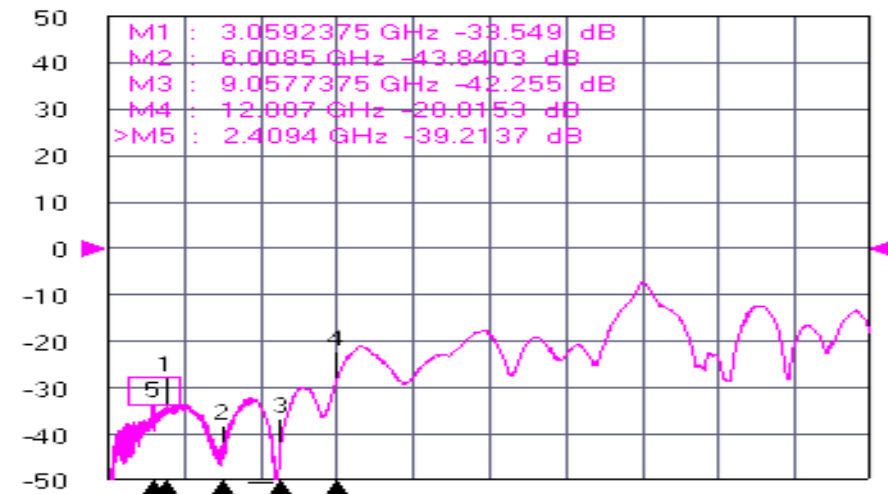

Ch1 TR Start 10 MHz Stop 40 GHz IFBW 1 kHz Avg OFF Measuring State CORR