

SMA Female Connector Solder Right Angle For PCB Mount
RF Connector Technical Data Sheet
S-037-TGG

Configuration

- SMA Female Connectr
- Solder
- 50 Ohms

Features

- Max VSWR of 1.3 : 1 up to 6 GHz
- SMA Interface compliant with MIL-STD-348A

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.3 : 1	

SMA Female Connector Solder Right Angle For PCB Mount
RF Connector Technical Data Sheet
S-037-TGG

Description	Connector
Type	SMA Female
Polarity	Standard
Interface Specification	MIL-STD-348A MIL-C-39012
Mating Cycles	500

Material Specifications

Connector 1		
Description	Material	Plating
Type	SMA Female	-
Contact	Phosphor Bronze	Gold
Insulation	PTFE	-
Body	Brass	Gold

Environmental Specifications
Temperature

Operating Range -60 to +165 deg C



Compliance Certifications

- RoHS Compliant Yes

Plotted and Other Data

Notes :

SMA Female Connector Solder Right Angle For PCB Mount
RF Connector Technical Data Sheet
S-037-TGG

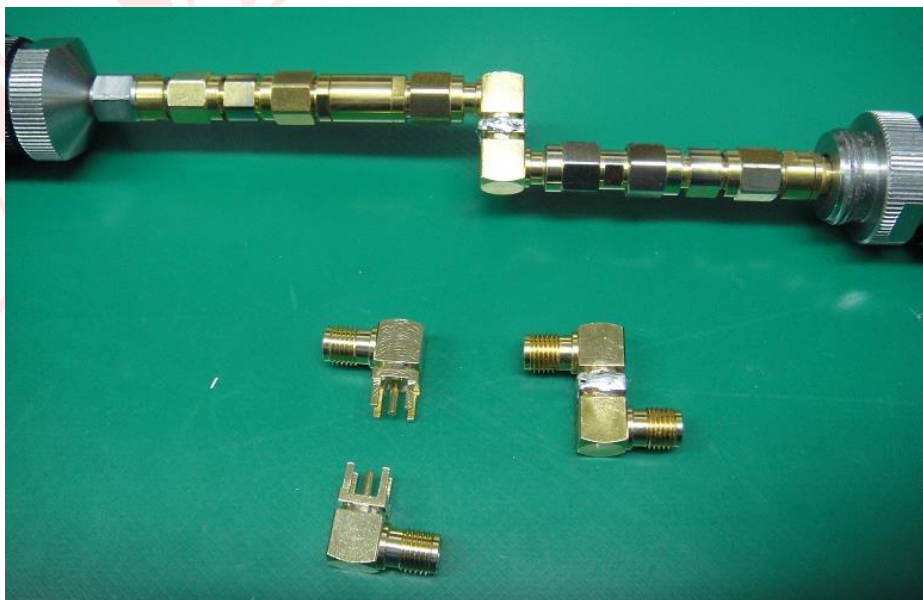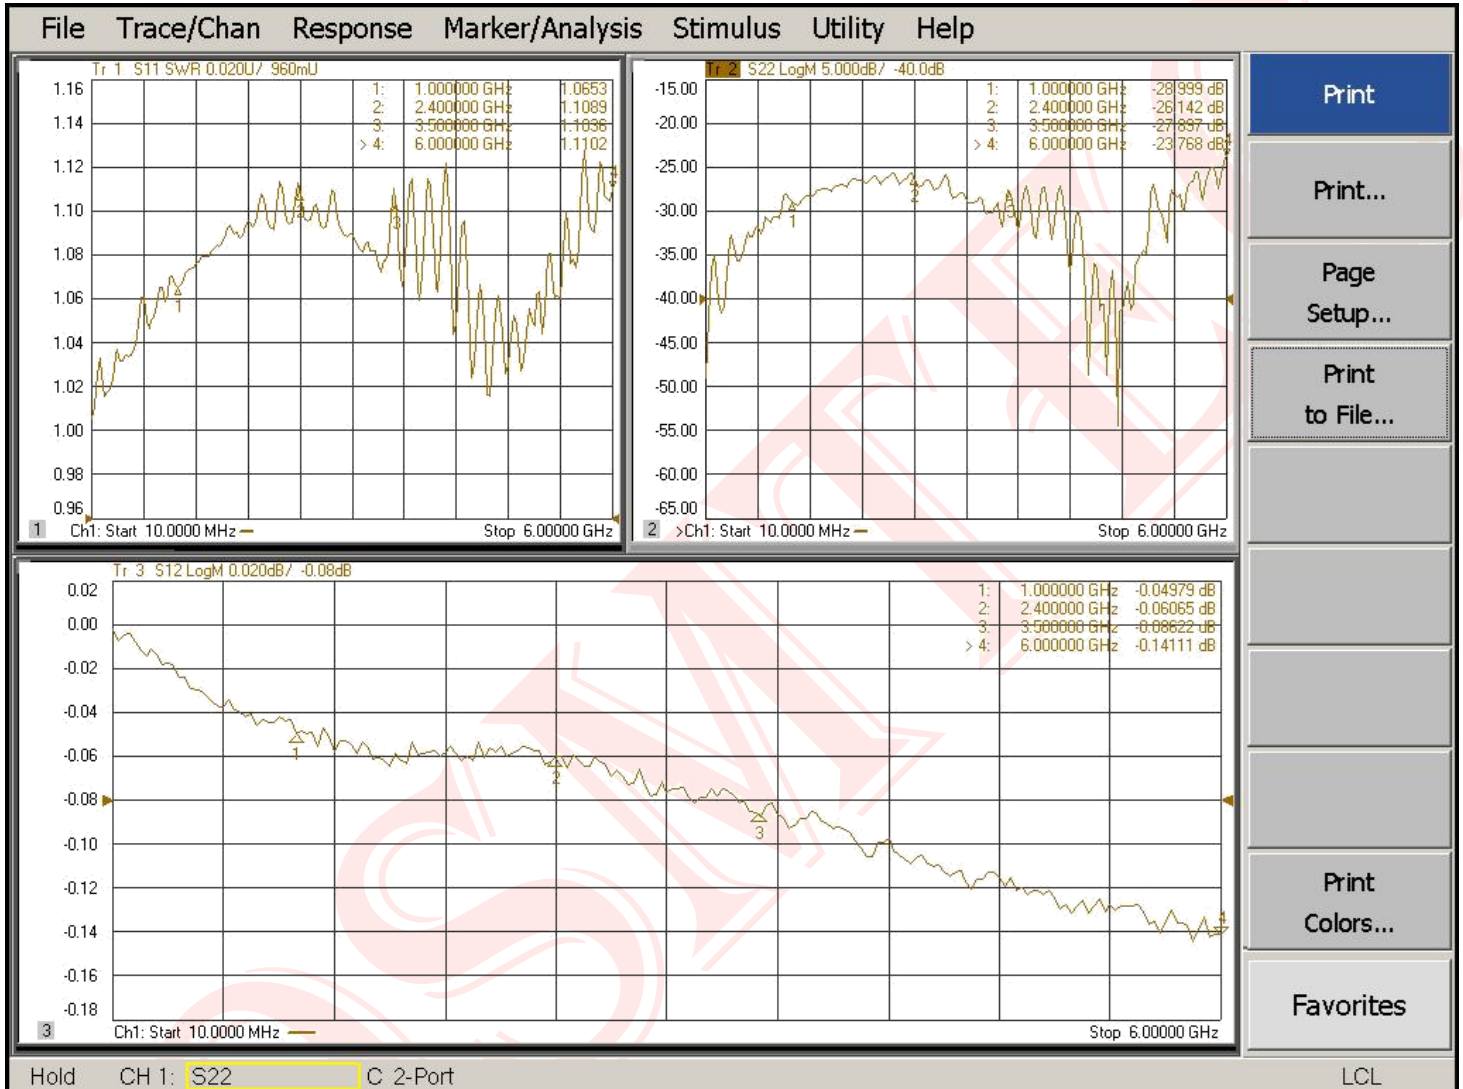

SMA Female Connector Solder Right Angle For PCB Mount
RF Connector Technical Data Sheet
S-037-TGG

