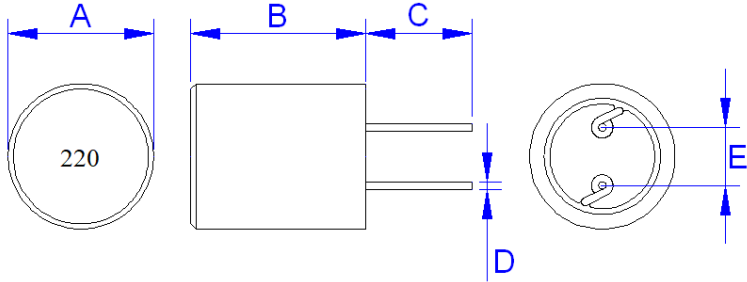



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:
PART NO: SRC1013-220M+M		DWG.NO: FX20122201
CUSTOMER PART NO:		CUST.DWG.NO:
<p>(1) DIMENSION(UNIT: mm)</p> 		A 11.0 (MAX) m/m
		B 12.5 ± 2.0 m/m
		C 5.0 ± 1.0 m/m
		D 0.6 (REF) m/m
		E 5.0 (REF) m/m
		F m/m
		G m/m
		H m/m
		(2)ELECTRICAL REQUIREMENTS
L (uH)	22 ± 20%	
RDC (mΩ)	60 (MAX)	
IDC (A)	2.2 (MAX)	
TEST CONDITION	1KHz / 0.25V	
(4)MATERIAL LIST		
NO/ITEM	MATERIAL	SUPPLIER
CORE	DR2W7.5×10 5.8-6-5 P10.5×8.2×14 OR EQU	HORNG YIH OR EQU
WIRE TYPE	2UEW φ 0.45mm OR EQU	ELEKTRISOLA OR EQU
WINDING	15.5TS (REF)	
TUBE	φ 8.0×12mm OR EQU	DONG GUAN SALIPT OR EQU
		APPROVED BY 吳載敏
		CHECKED BY 張明德
		DRAWN BY Vicky

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: SRC1013-220M+M				DWG.NO: FX20122201				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (mΩ)	IDC (A)	A	B	C	D	E
SPEC	22 ± 20%	60 (MAX)	2.2 (MAX)	11.0 (MAX)	12.5 ± 2.0	5.0 ± 1.0	0.6 (REF)	5.0 (REF)
1	22.60	34.55	OK	10.02	13.70	5.05	0.60	5.01
2	22.00	33.51	OK	10.23	14.04	5.01	0.59	4.92
3	22.66	34.07	OK	10.10	13.73	5.05	0.61	5.07
4	22.12	34.00	OK	10.02	14.01	5.01	0.60	5.02
5	22.23	35.00	OK	10.03	13.98	5.02	0.60	5.01
6	22.10	34.23	OK	9.77	13.60	4.98	0.61	5.00
7	22.40	33.10	OK	9.77	14.28	5.13	0.60	5.05
8	22.07	34.79	OK	10.03	14.40	4.97	0.61	5.03
9	22.56	33.24	OK	9.85	14.41	4.94	0.61	5.06
10	22.02	34.04	OK	9.94	14.21	4.94	0.60	5.07
X	22.28	34.05		9.98	14.04	5.01	0.60	5.02
R	0.66	1.90		0.46	0.81	0.19	0.02	0.15
TEST INSTRUMENTS VR113 VR712						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY Vicky		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw