

1 2 3 4 5 6 7 8 9 10

A

B

C

D

E

F

G

H

A

B

C





D

E

F

G

H

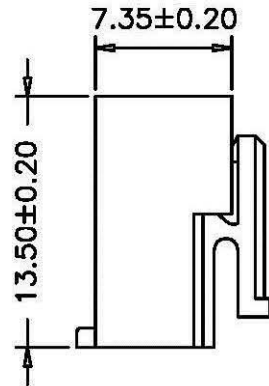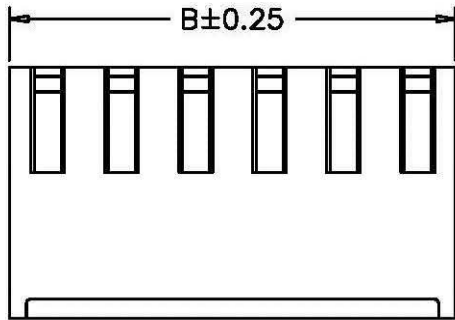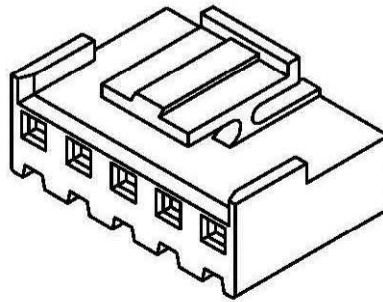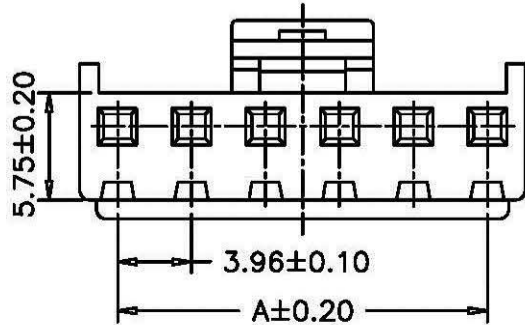

SPECIFICATIONS

Voltage Rating: 250V AC/DC

Current Rating: 7A AC/DC

Withstanding Voltage: 1500V AC/minute

Insulation Resistance: 1000MΩ min.

Temperature Range: -25° C - +85° C

Contact Resistance: 20mΩ max

HOUSING

Pole: 02-12

Material: Nylon 66, UL94V-0

NO	DIMENSION	
	A	B
02	3.96	8.20
03	7.92	12.16
04	11.88	16.12
05	15.84	20.08
06	19.80	24.04
07	23.76	28.00
08	27.72	31.96
09	31.68	35.92
10	35.64	39.92
11	39.60	43.88
12	43.56	47.84

					OPERATION	DRAW	JACKEY	2005.03.18	SCALE		Chang Enn Co., Ltd.	
					~ 10 ±0.15	DESIGN			UNIT	mm		
					20 ~ 30 ±0.30	CHECK		2005.03.18	SIZE	A4	PART NO.	SVHR-xxN
0	05/12/27	NEW			30 ~ ±0.50	APPROVE	ALEX	2005.03.18	SHEET	1/1	TITLE:	3.96 HOUSING
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 2°				PROJ.	◆	DRAWING NO.	
					DIM TOL							

1 2 3 4 5 6 7 8 9 10