

# HK829

## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

### Features


- ◆ Single-chip, high-quality voice recording & playback solution
  - No external ICs required
  - Minimum external components required
- ◆ Non-volatile Flash memory technology
  - No battery backup required
- ◆ User-selectable message record , options by 1,2,4 message
- ◆ Built-in audio-recording microphone amplifier no external amplifier circuits required
- ◆ Configurable analog interface, differential-ended MIC pre-amplifier for low noise with high quality line received
- ◆ DAC and PWM module with high quality analog to digital, resolution up to 16-bits
- ◆ User-friendly, easy-to-use operation
  - Programming & development systems not required
  - Level-activated recording & edge-activated playback switches
- ◆ Low power consumption
  - Standby current: 1μA
  - Automatic power-down, low power down current: 10μA
  - Supports power-down mode for power saving
- ◆ Reset pin for message mode option

### General Description

HK829 is powerful audio processor along with high performance audio analog-to-digital converters (ADCs) and digital-to-analog converters (DACs). HK829 is a fully integrated solution offering high performance and unparalleled integration with analog input, digital processing and analog output functionality. It is also quality-enhancing features such as sample-rate convertor

HK829 is specially designed for simple key trigger, user can record and playback the message averagely for 1, 2 or 4 voice message(s) by switch. It is suitable in simple interface or need to limit the length of single message, e.g. toys, leave messages system, answering machine etc. Meanwhile, this mode provides the power-management system. Users can let the chip enter power-down mode when unused. It can effectively reduce electric current consuming to 10uA and increase the using time in any projects powered by batteries.

### PinOut Diagram

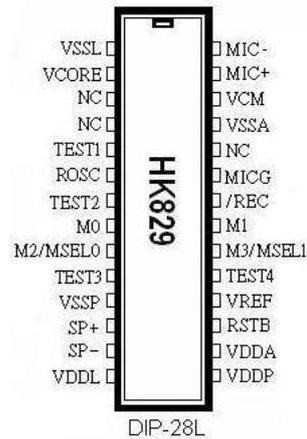

# HK829

## VOICE RECORDING/PLAYBACK IC


40-60 SEC. PROGRAMMABLE

### Functional Description

The HK829 block diagram is included in order to give understanding of the HK829's internal architecture. At the left hand side of the diagram are the analog inputs. A differential microphone amplifier, including integrated AGC circuit is included on-chip for applications requiring its use. The amplified microphone signal is fed into the device by connecting the MIC+ , MIC- and MICG pins through an external DC blocking capacitor. Recording can be fed directly into the MIC+ pin through a DC blocking capacitor and resistor, the connection between MIC+, MIC- and MICG are is represented in the lower center of the block diagram. still required for playback. The next block encountered by the input signal is the internal anti-aliasing filter. The filter automatically adjusts its response according to the sampling frequency selected so Shannon's sampling theorem is satisfied. After anti-aliasing filtering is accomplished the

storage is accomplished through a combination of the sample and hold circuit and the analog write/read circuit. These circuits are clocked by either the internal oscillator or an external clock source. When playback is desired the previously stored recording is retrieved from memory, low pass filtered, and amplified as shown on the right hand side of the diagram. The signal can be heard by connecting a speaker to the SP+ and SP- pins. Chip-wide management is accomplished through the device control block shown in the upper right hand corner. Message management signal is ready to be clocked into the memory array. The more detail on actual device application can be found in the sample applications section. More detail on sampling control can be found in the sample rate and voice quality section. More detail on message management and device control' can be found in the message management section.

### Block Diagram

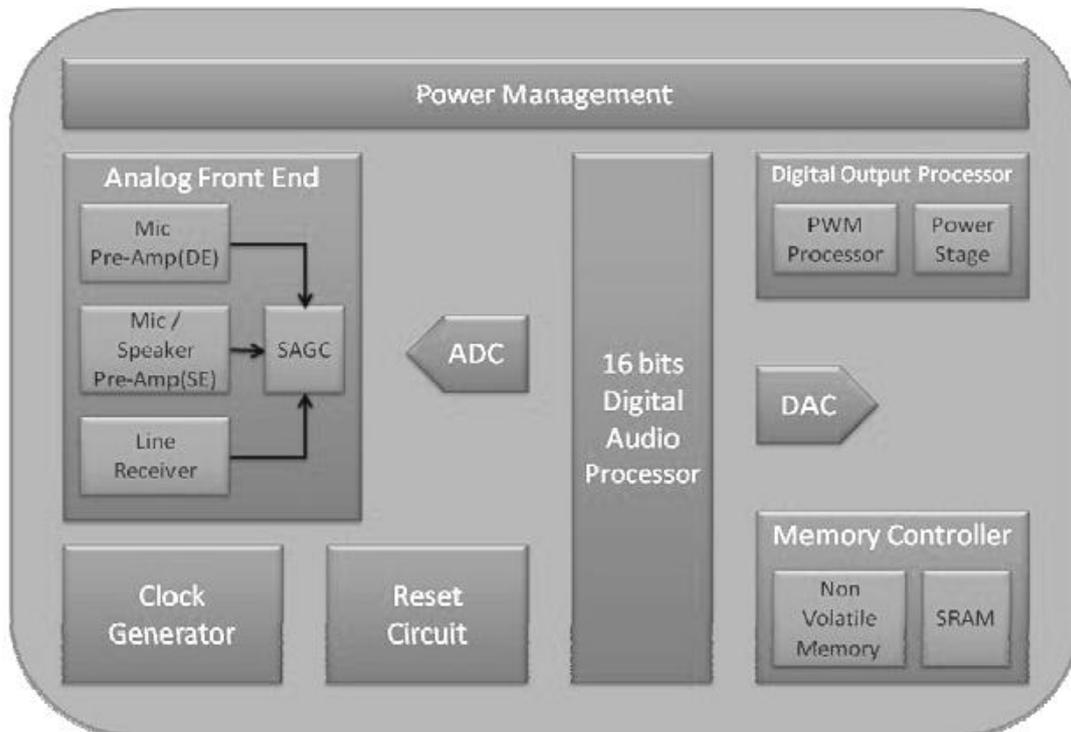

# HK829

## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

### Pin Descriptions


Pin name	Pin No.	Type	Description
VDDL	14	Power	Positive power supply
VDDP	15		
VDDA	16		
VSSL	1	Power	Power ground
VSSP	11		
VSSA	25		
VCORE	2	Power	Positive power supply for core
VREF	18		Reference voltage
VCM	26		Common mode voltage
ROSC	6	Input	Oscillator resistor Input
RSTB	17	Input	Reset ( Low active )
MIC+	27	Input	Microphone differential input
MIC-	28		
MICG	23	Output	Microphone ground
SP+	12	Output	Speaker connecting pin for sound output
SP-	13		
/REC	22	Input	Connect to ground for record mode Floating for playback mode
M0	8	Input	Message-0
M1	21	Input	Message-1
M2 / MSEL0	9	Input	Message-2,message select 0
M3 / MSEL1	20	Input	Message-3,message select 1
TEST1	5	X	IC inside test for development engineer use ( User no needed to use )
TEST2	7		
TEST3	10		
TEST4	19		
N.C.	3 , 4 , 24	X	No connecting

# HK829

VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

## Typical Application Circuit

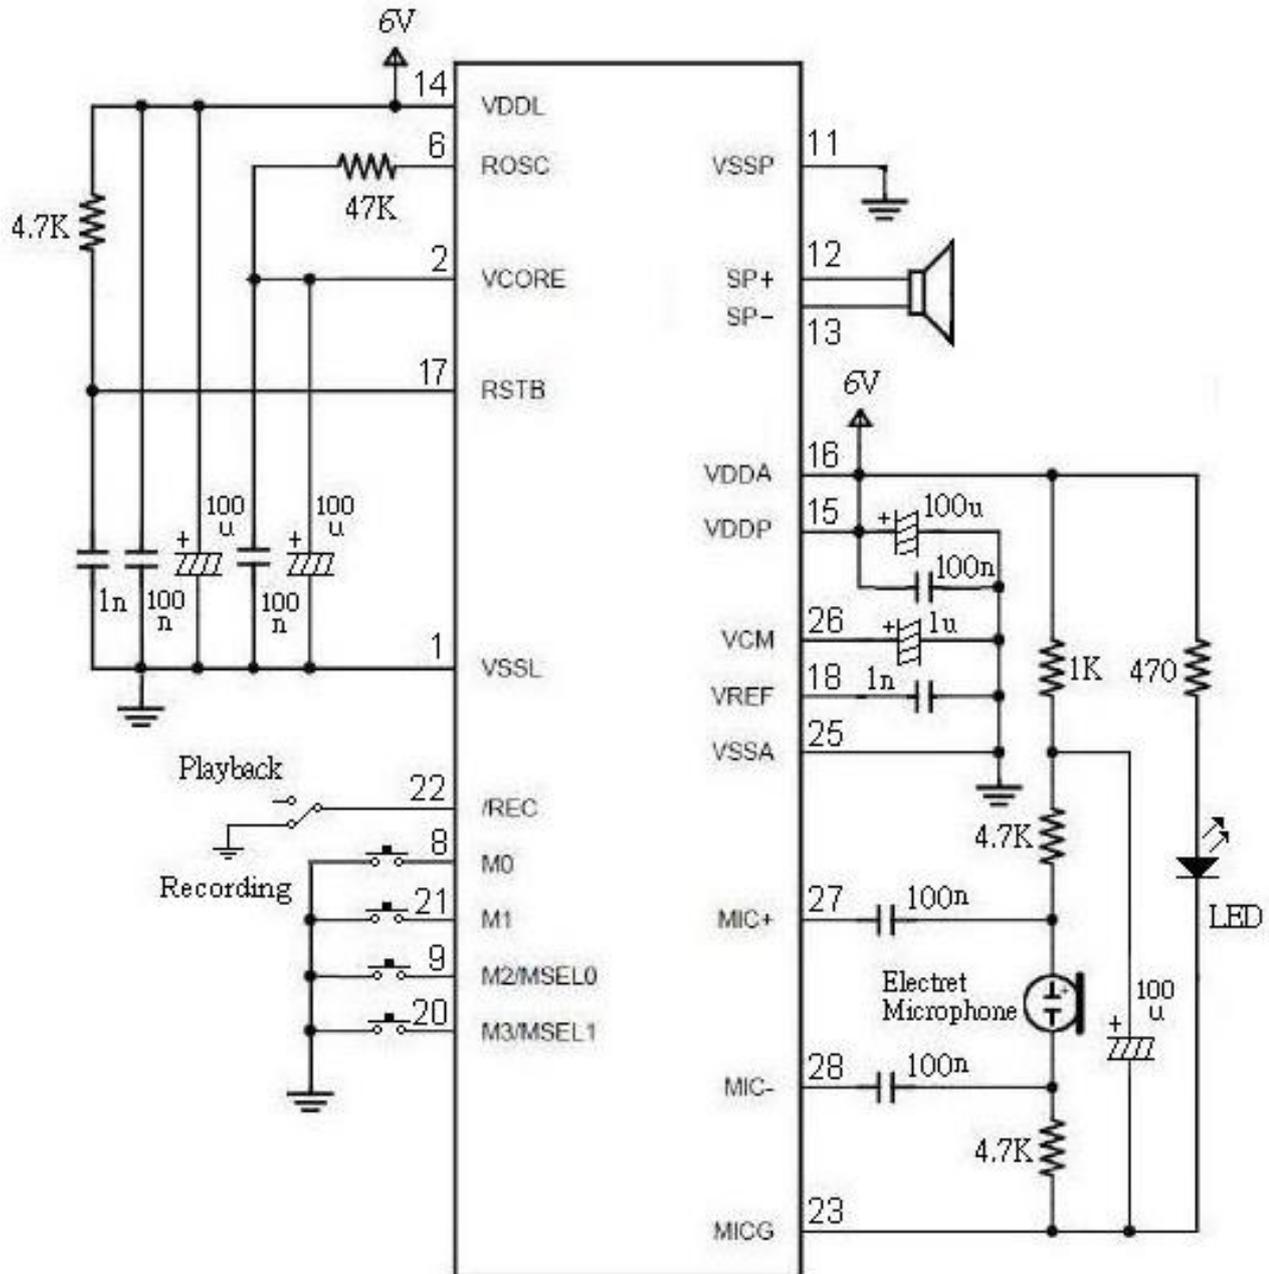

# HK829

## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

### Function Option

#### Recording / Playback Message Option

##### Voice Recording :

During the /REC pin drove to VIL, chip in the recording mode, when the message pin ( M0, M1, M2 or M3 ) drove to VIL in record mode, the chip will playback “beep” tone and message record starting. The message record will continue until message pin released or full of this message, and the chip will play “beep” tone to indicate the message record finished , if the message already exist and user record again, the old one’s message will be replaced.

##### Voice Playback:


During the /REC pin drove to VIH, chip in the playback mode. When the message pin (M0, M1, M2 or M3) drove from VIH to VIL in playback mode, the message playback will continue until message pin drove from VIH to VIL again or end of this message. The following fig. showed a typical playback circuit for 4-message mode. We connected a slide-switch between /REC and VSS, and connected 4 tact-switches between M0 ~ M3 and VSS. When the slide-switch fixed in float side and any tact-switch will be pressed, chip will start message playback and until the user pressed the tact-switch again or end of message.

In fixed 1/ 2/ 4 message mode, user can divide the memory averagely for 1, 2 or 4 message(s). The message mode will be applied after chip reset by the MSEL0 and MSEL1 pin

##### Please note :

The message should be recorded and played in same message mode, it **CAN NOT** guarantee that the message is complete after message mode changed. For example, user recorded 4 messages in the 4-message mode, those messages can be played in 4-message mode only. If user changed to 1 or 2 message mode, system will discard those messages.

#### 4 Messages Mode :

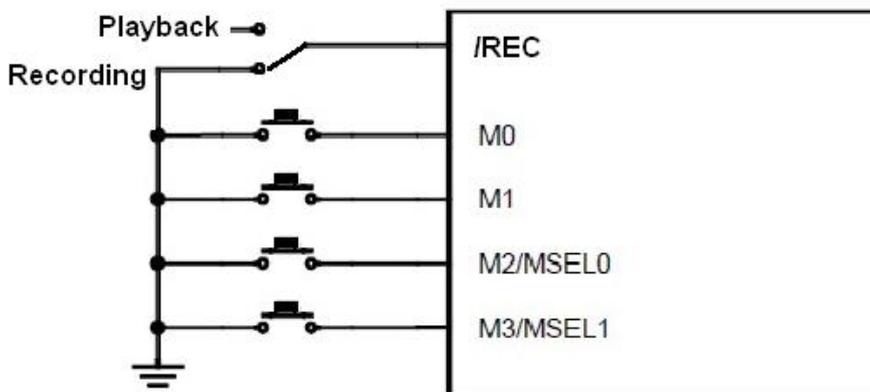

The memory will be divided to 4 messages averagely when both MSEL0 and MSEL1 pin float after chip reset


# HK829

## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE


### 2 Messages Mode :

The memory will be divided to 2 messages averagely when M2/MSEL0 pin connected to VSS and M3/MSEL1 pin float after chip reset

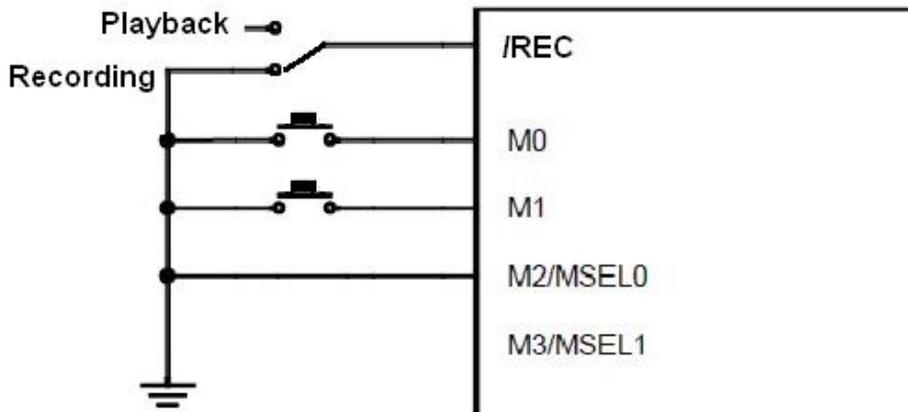

### 1 Messages Mode :

The memory will be for 1 message when both MSEL0 and MSEL1 pin connected to VSS after chip reset

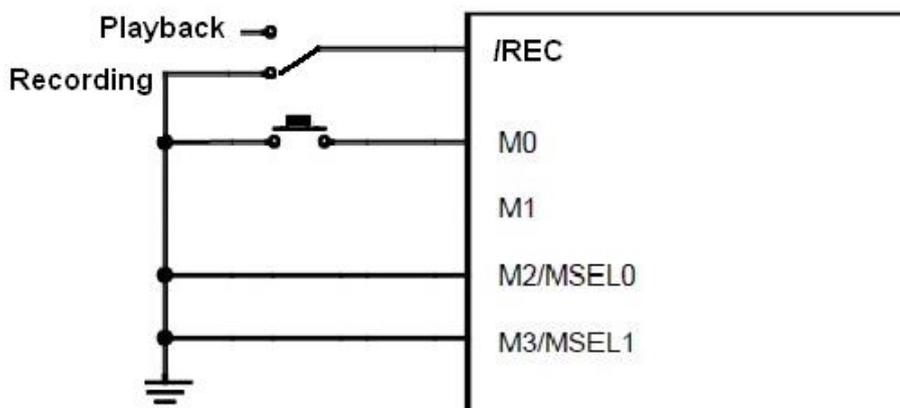


# HK829

## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

### Voice Input

The HK829 supported single channel voice input by microphone or line-in. The following fig showed circuit for different input methods: microphone, line-in and mixture of both.

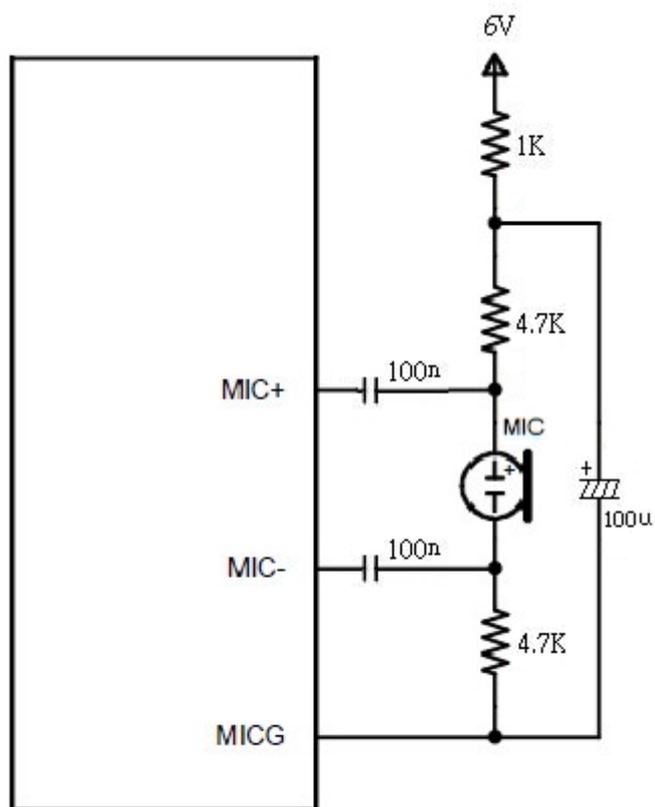


Voice input from microphone

# HK829

VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

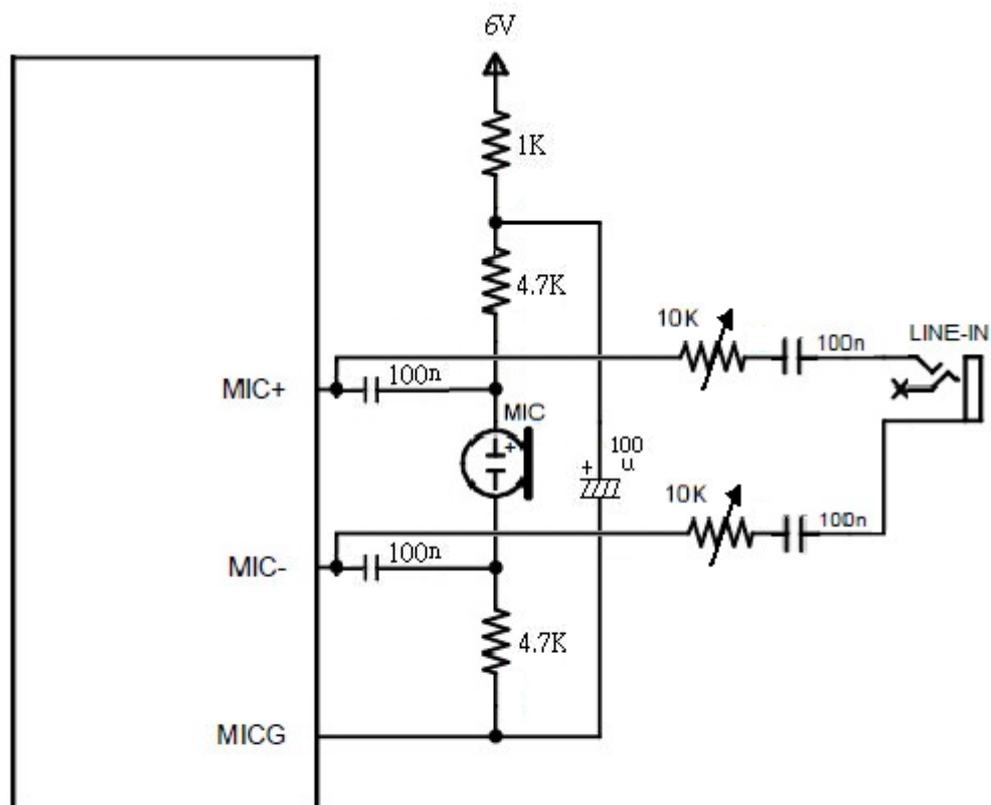

Voice input from microphone & line in both

# HK829

## VOICE RECORDING/PLAYBACK IC


40-60 SEC. PROGRAMMABLE

### Voice Output


The HK829 support 2 voice output mode, PWM and DAC

PWM mode : To use SP+ and SP- pin to drive a speaker directly without external components to save cost

DAC mode : SP- pin to output current signal, user can use the signal to external audio amplifier, or mix, with other components in their applications to provide larger voice volume

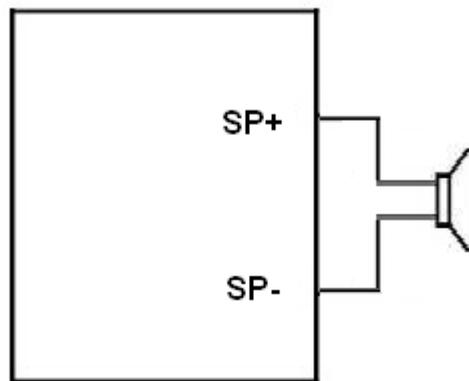

PWM output


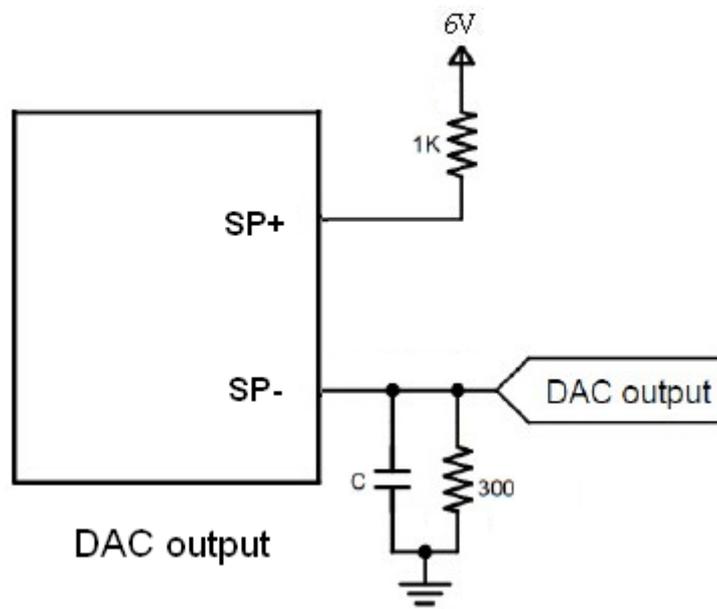


DAC output

# HK829

VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

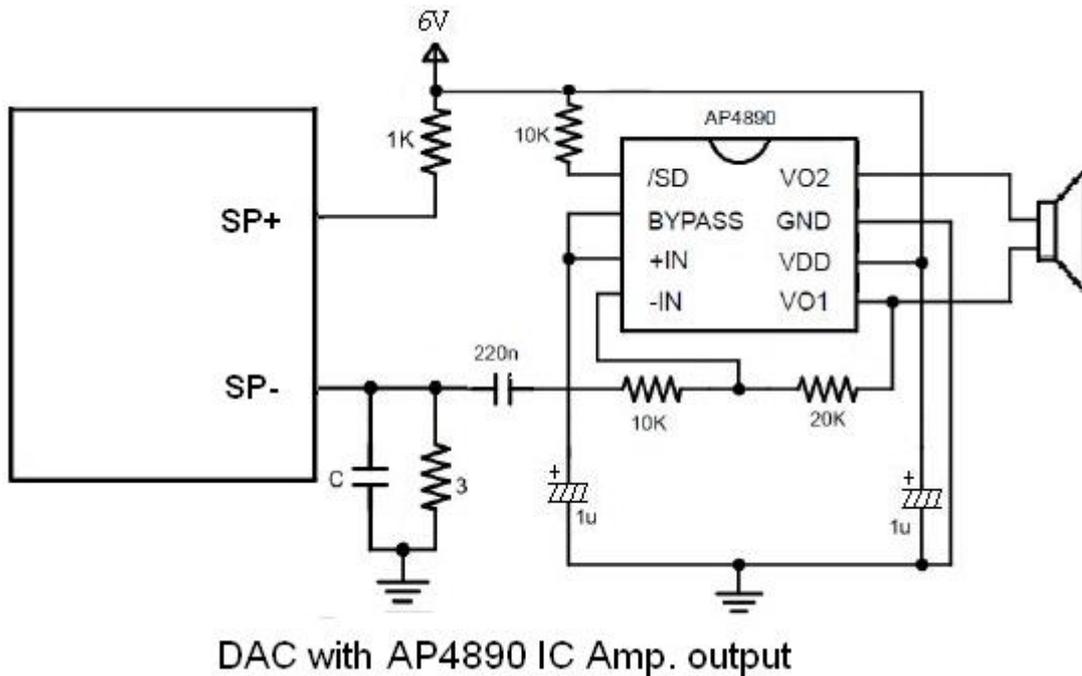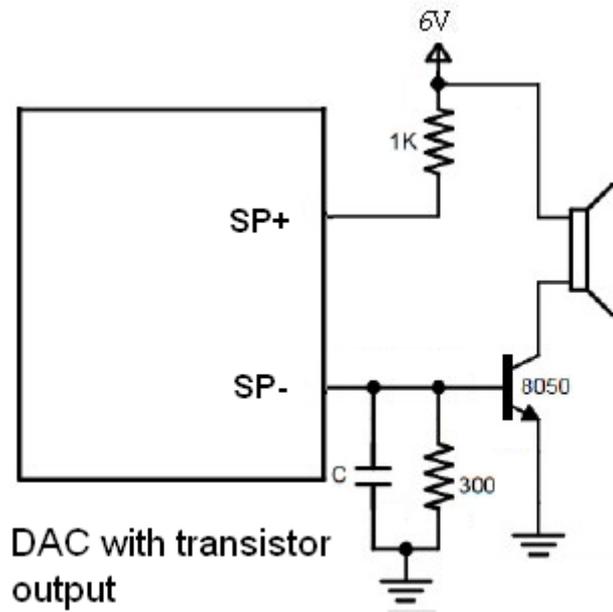


# HK829

## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

### BUSY Signal

The MICG pin will be drove to low during the message record or playback, and drove to high during idle or standby, user can detect MICG status to know chip is busy or not.

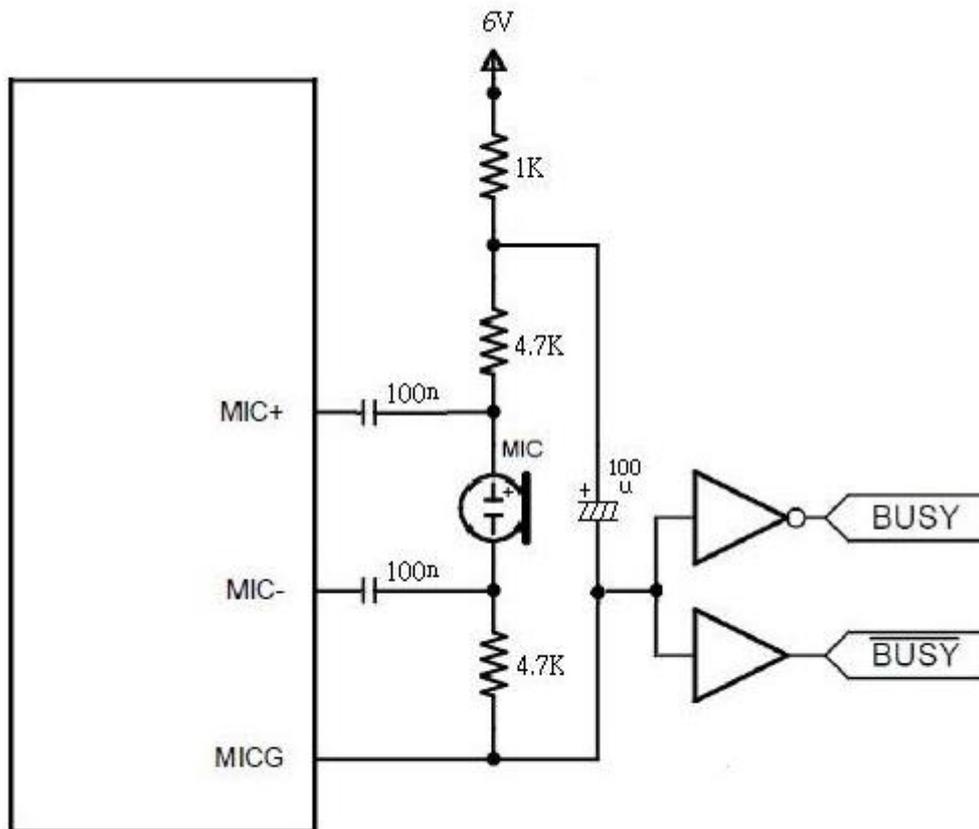


Buffer & inverter for BUSY signal

# HK829

VOICE RECORDING/PLAYBACK IC


40-60 SEC. PROGRAMMABLE

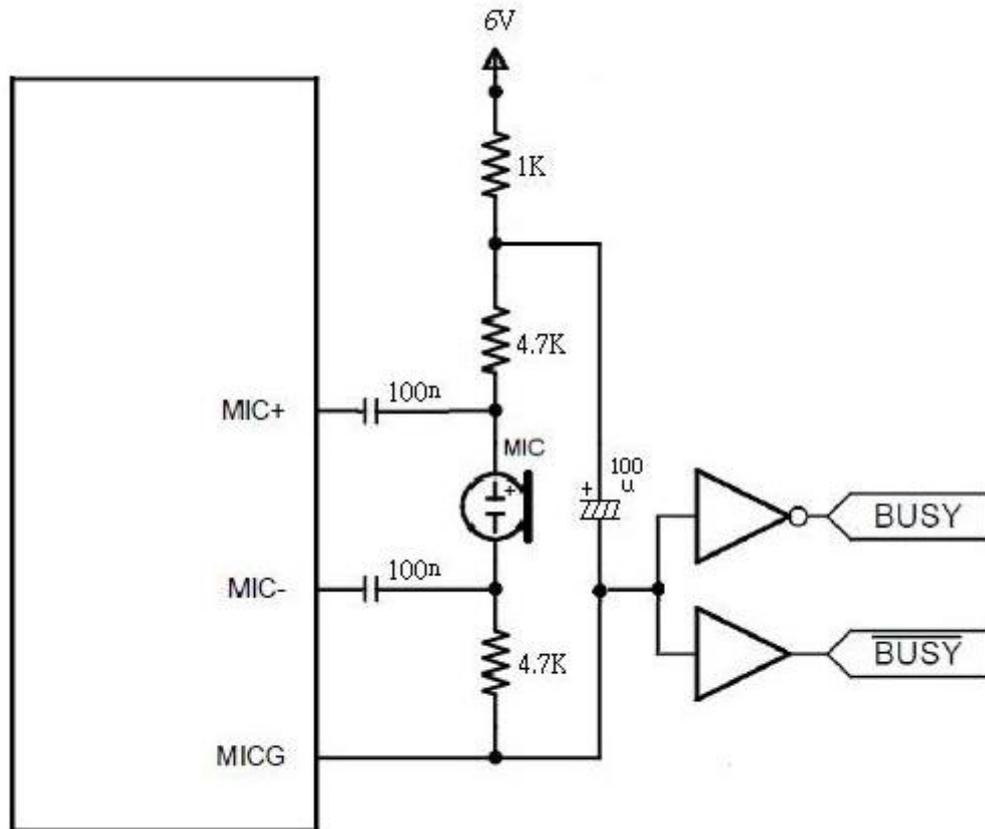

Buffer & inverter for BUSY signal

## RESET Signal

The HK829 can enter standby mode when RSTB pin drive to low. During chip in the standby mode, the current consumption is reduced to ISB and any operation will be stopped, user also can not execute any new operate in this mode. The standby mode will continue until RSTB pin goes to high, chip will be started to initial, and playback "beep" tone to indicate enter idle mode. User can get less current consumption by control RSTB pin specially in some application which concern standby current

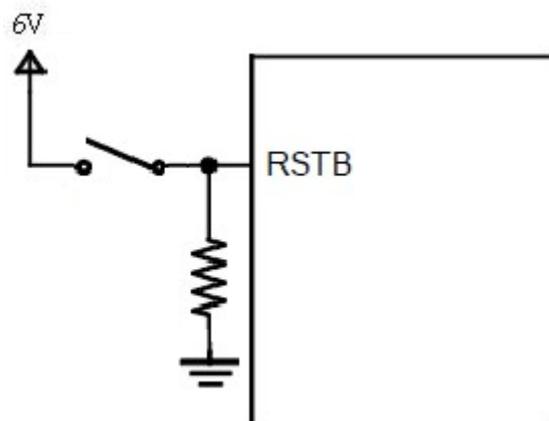

# HK829


## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

### Sample Rate Table

Recording Duration	ROSC Resistor Value	Sample Rate
42 Seconds	47 K $\Omega$	12 KHz
46 Seconds	63 K $\Omega$	11 KHz
51 Seconds	79 K $\Omega$	10 KHz
56 Seconds	100 K $\Omega$	9 KHz
64 Seconds	120 K $\Omega$	8 KHz
73 Seconds	143 K $\Omega$	7 KHz
85 Seconds	173 K $\Omega$	6 KHz

### RTS ( Reset ) and M0 , M1 , M2/MSEL0 , M3/MSEL1 Timing

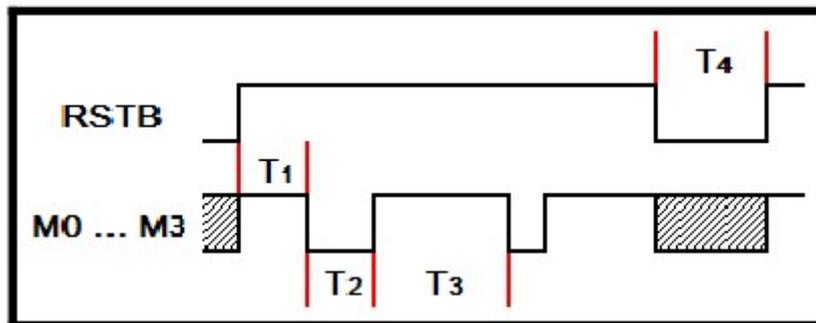

Symbol	Parameter	Min.	Typ.	Max.	Unit	Conditions
T1	System Initial Time	100			mS	VDD=5.0V
T2	Trigger Setup Time	16			mS	VDD=5.0V
T3	Trigger Hold Time	16			mS	VDD=5.0V
T4	Reset Hold Time	100			$\mu$ S	VDD=5.0V

# HK829

## VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

### Electrical Characteristics

The following tables list Absolute Maximum Ratings, DC Characteristics, and Analog Characteristics for the HK829 device.

#### Absolute Maximum Ratings

Item	Sym.	Condition	Min	Typ.	Max	Unit
Power Supply voltage	V <sub>CC</sub>	T <sub>A</sub> = 25°C	3.8	6.0	6.9	V
Input Voltage	V <sub>IN2</sub>	I <sub>IN</sub> < 20mA	-1.0	-	V <sub>CC</sub> + 1.0	V
Storage Temperature	T <sub>STG</sub>	-	-65	25	150	°C
Temperature Under Bias	T <sub>BS</sub>	-	-65	25	125	°C
Lead Temperature	T <sub>LD</sub>	< 10s	-0.3	25	300	°C

#### DC Characteristics

Item	Sym.	Condition	Min	Typ.	Max	Unit
Power Supply voltage	V <sub>CC</sub>	T <sub>A</sub> = 25°C	4.5	6	6.9	V
Input High Voltage	V <sub>IN</sub>	-	2.0	-	-	V
Input Low Voltage	V <sub>IL</sub>	-	-	-	0.8	V
Output High Voltage	V <sub>OH</sub>	I <sub>OH</sub> = -1.6 mA	2.4	-	-	V
Output Low Voltage	V <sub>OL</sub>	I <sub>OL</sub> = -4.0 mA	-	-	0.45	V
Output Tristate Leakage Current	I <sub>OZ</sub>	V <sub>OUT</sub> = V <sub>CC</sub> or V <sub>OUT</sub> = V <sub>SS</sub>	-1.0	-	1.0	µA
Operating Current Consumption	I <sub>CC</sub>	Internal Clock, No Load	-	25	-	mA
Standby Current Consumption	I <sub>CCS</sub>	No Load	-	1.0	-	µA

#### Analog Characteristics\*

Item	Sym.	Condition	Min	Typ.	Max	Unit
Micin Input Voltage	V <sub>MI</sub>	-	-	-	30	mV <sub>p-p</sub>
Micin Input Resistance	R <sub>MI</sub>	-	-	15	-	kΩ
Micin Amp Gain (1)	G <sub>MI1</sub>	AGC = 2.25V	-	30	-	dB
Micin Amp Gain (2)	G <sub>MI2</sub>	AGC = 3.8V	-	-2	-	dB
Anain Input Voltage	V <sub>ANI</sub>	-	-	-	140	mV <sub>p-p</sub>
Anain Input Resistance	R <sub>ANI</sub>	-	-	500	-	kΩ
Anain Amp Gain	G <sub>ANI</sub>	Analn to SP +/-	-	10	-	dB
AGC Output Resistance	R <sub>AGC</sub>	-	-	225	-	kΩ
Sp +/- Output Power	P <sub>SP</sub>	R <sub>SP +/-</sub> = 16Ω	-	12.2	-	mW
Voltage Amplitude across SP +/-	V <sub>SP</sub>	R <sub>SP +/-</sub> ≥ 16Ω	-	1.4	-	V <sub>p-p</sub>

# HK829

VOICE RECORDING/PLAYBACK IC

40-60 SEC. PROGRAMMABLE

## Package Outlines

The HK829 device is available in the DIP package form , Packages conform to JEDEC and EIAJ standards.

28-Pin Plastic Dual In-Line Package ( DIP-28L, P-600 )

